


EDI MODEL 2018ECLIP-NC CONFLICT MONITOR
PROGRAMMING DETAIL

(set switches as shown)

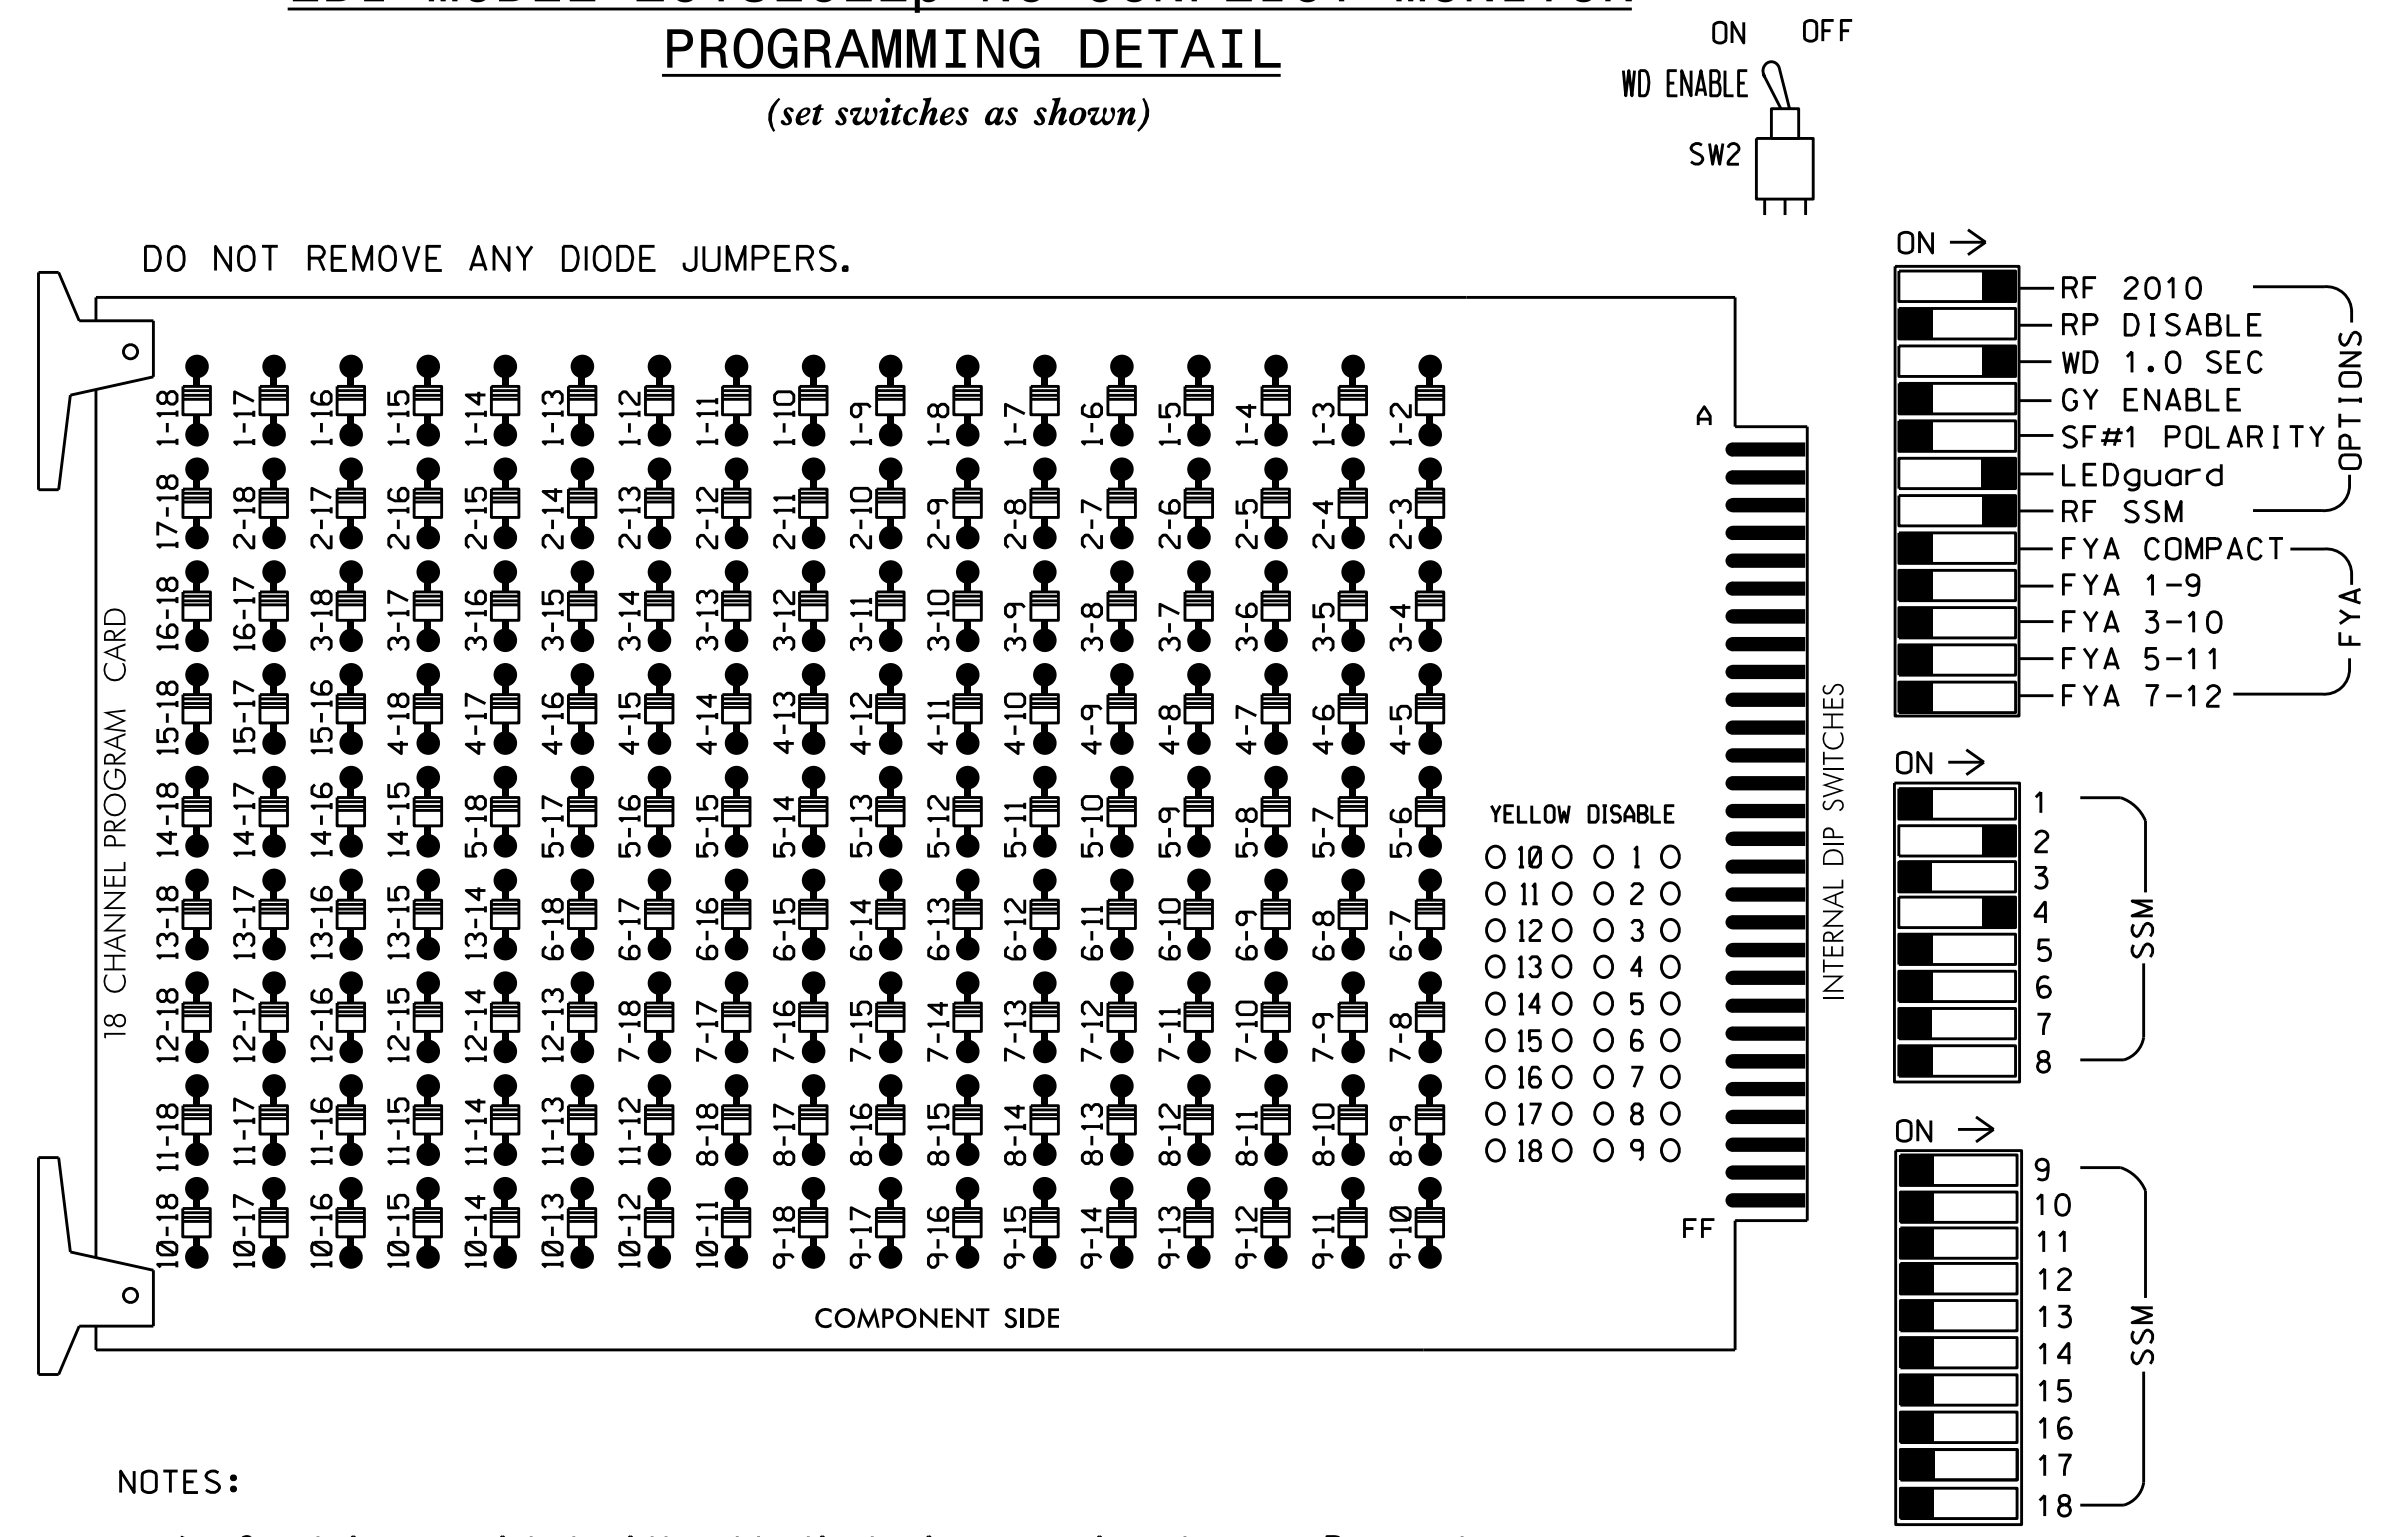

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that Red Enable is active at all times during normal operation.
4. Integrate monitor with Ethernet network in cabinet.

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Enable Simultaneous Gap-Out for all phases.
3. Program phase 2 for Variable Initial and Gap Reduction.
4. Program phase 2 for Start Up In Green.
5. Program phase 2 for Yellow Flash.
6. The cabinet and controller are part of the Asheville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070E
CABINET.....336
SOFTWARE.....ECONOLITE OASIS
CABINET MOUNT.....POLE
OUTPUT FILE POSITIONS...12
LOAD SWITCHES USED.....S2,S5
PHASES USED.....2,4
OVERLAPS.....NONE


SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED
SIGNAL HEAD NO.	NU	21,22	NU	NU	41,42	NU	NU	NU	NU	NU	NU	NU
RED		128			101							
YELLOW		129			102							
GREEN		130			103							
RED ARROW												
YELLOW ARROW												
GREEN ARROW												

NU = Not Used

INPUT FILE POSITION LAYOUT

(front view)

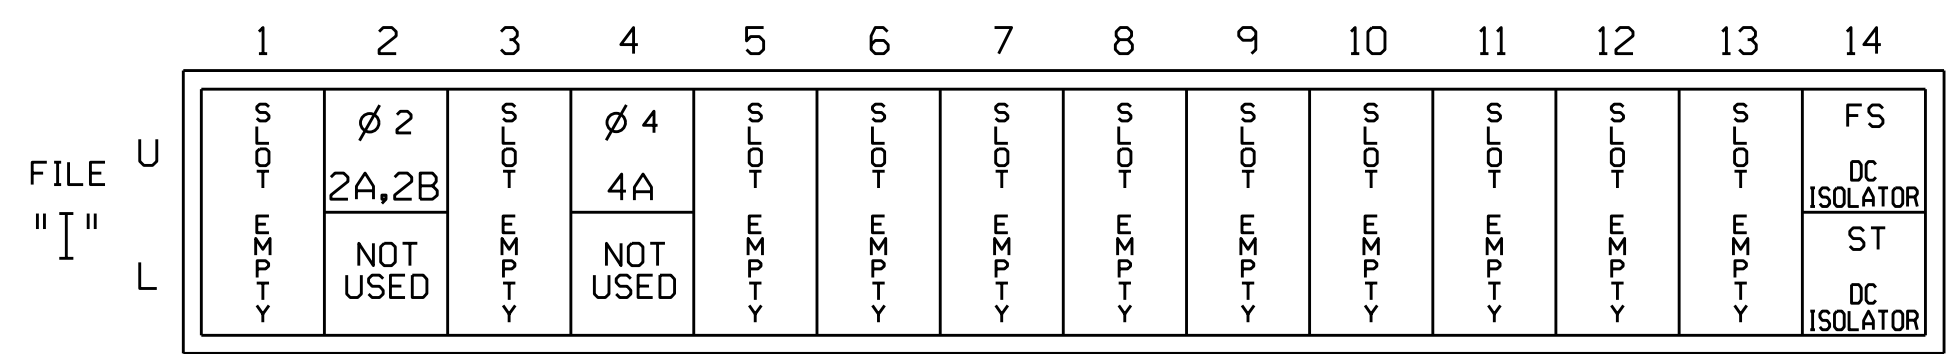


EX. : 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
2A,2B	TB21-3,4	I2U	39	1	2	2	Y	Y			
4A	TB21-7,8	I4U	41	3	4	4	Y	Y			

INPUT FILE POSITION LEGEND: I2L



THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 13-1029
DESIGNED: June 2016
SEALED: 09-01-16
REVISED: N/A

Electrical Detail

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL

Prepared In the Offices of:

Transporatio Mobility and Safety Solutions
NORTH CAROLINA PROFESSIONAL ENGINEER
KEITH M. MINS

Division 18 Buncombe County Asheville

I-240 EB Exit Ramp at I-240/US 19-23 Ramps

PLAN DATE: August 2016 REVIEWED BY:

PREPARED BY: James Peterson REVIEWED BY:

REVISIONS INIT. DATE

9/13/2016

SIG. INVENTORY NO. 13-1029

07-SEP-2016 14:01 S:\IT\SS\13-1029\SIG\13-1029-smc.ele...xxx.dgn J.peterson