


SPLICE ENCLOSURE NO. S9-1							
DEVICE ID	CRP SHEET	CABLE X			CABLE Y		
		CABLE NUMBER	ALONG ROUTE	TO	CABLE NUMBER	ALONG ROUTE	TO
13-0731	CRP-6.128	9A	NC 191 (BREVARD RD)	I-26 WBD RAMP	9A	NC 191 (BREVARD RD)	OAKVIEW RD/FARMERS MARKET
13-0466	CRP-6.129	9A	NC 191 (BREVARD RD)	POND RD	9A	NC 191 (BREVARD RD)	I-40 EBD RAMP
13-0514	CRP-6.123	9A	NC 191 (BREVARD RD)	PETCO	9A	NC 191 (BREVARD RD)	I-26 WBD RAMP
CCTV 08	CRP-6.123	9A	NC 191 (BREVARD RD)	I-26 EBD RAMPS	9A	NC 191 (BREVARD RD)	I-26 WBD RAMPS

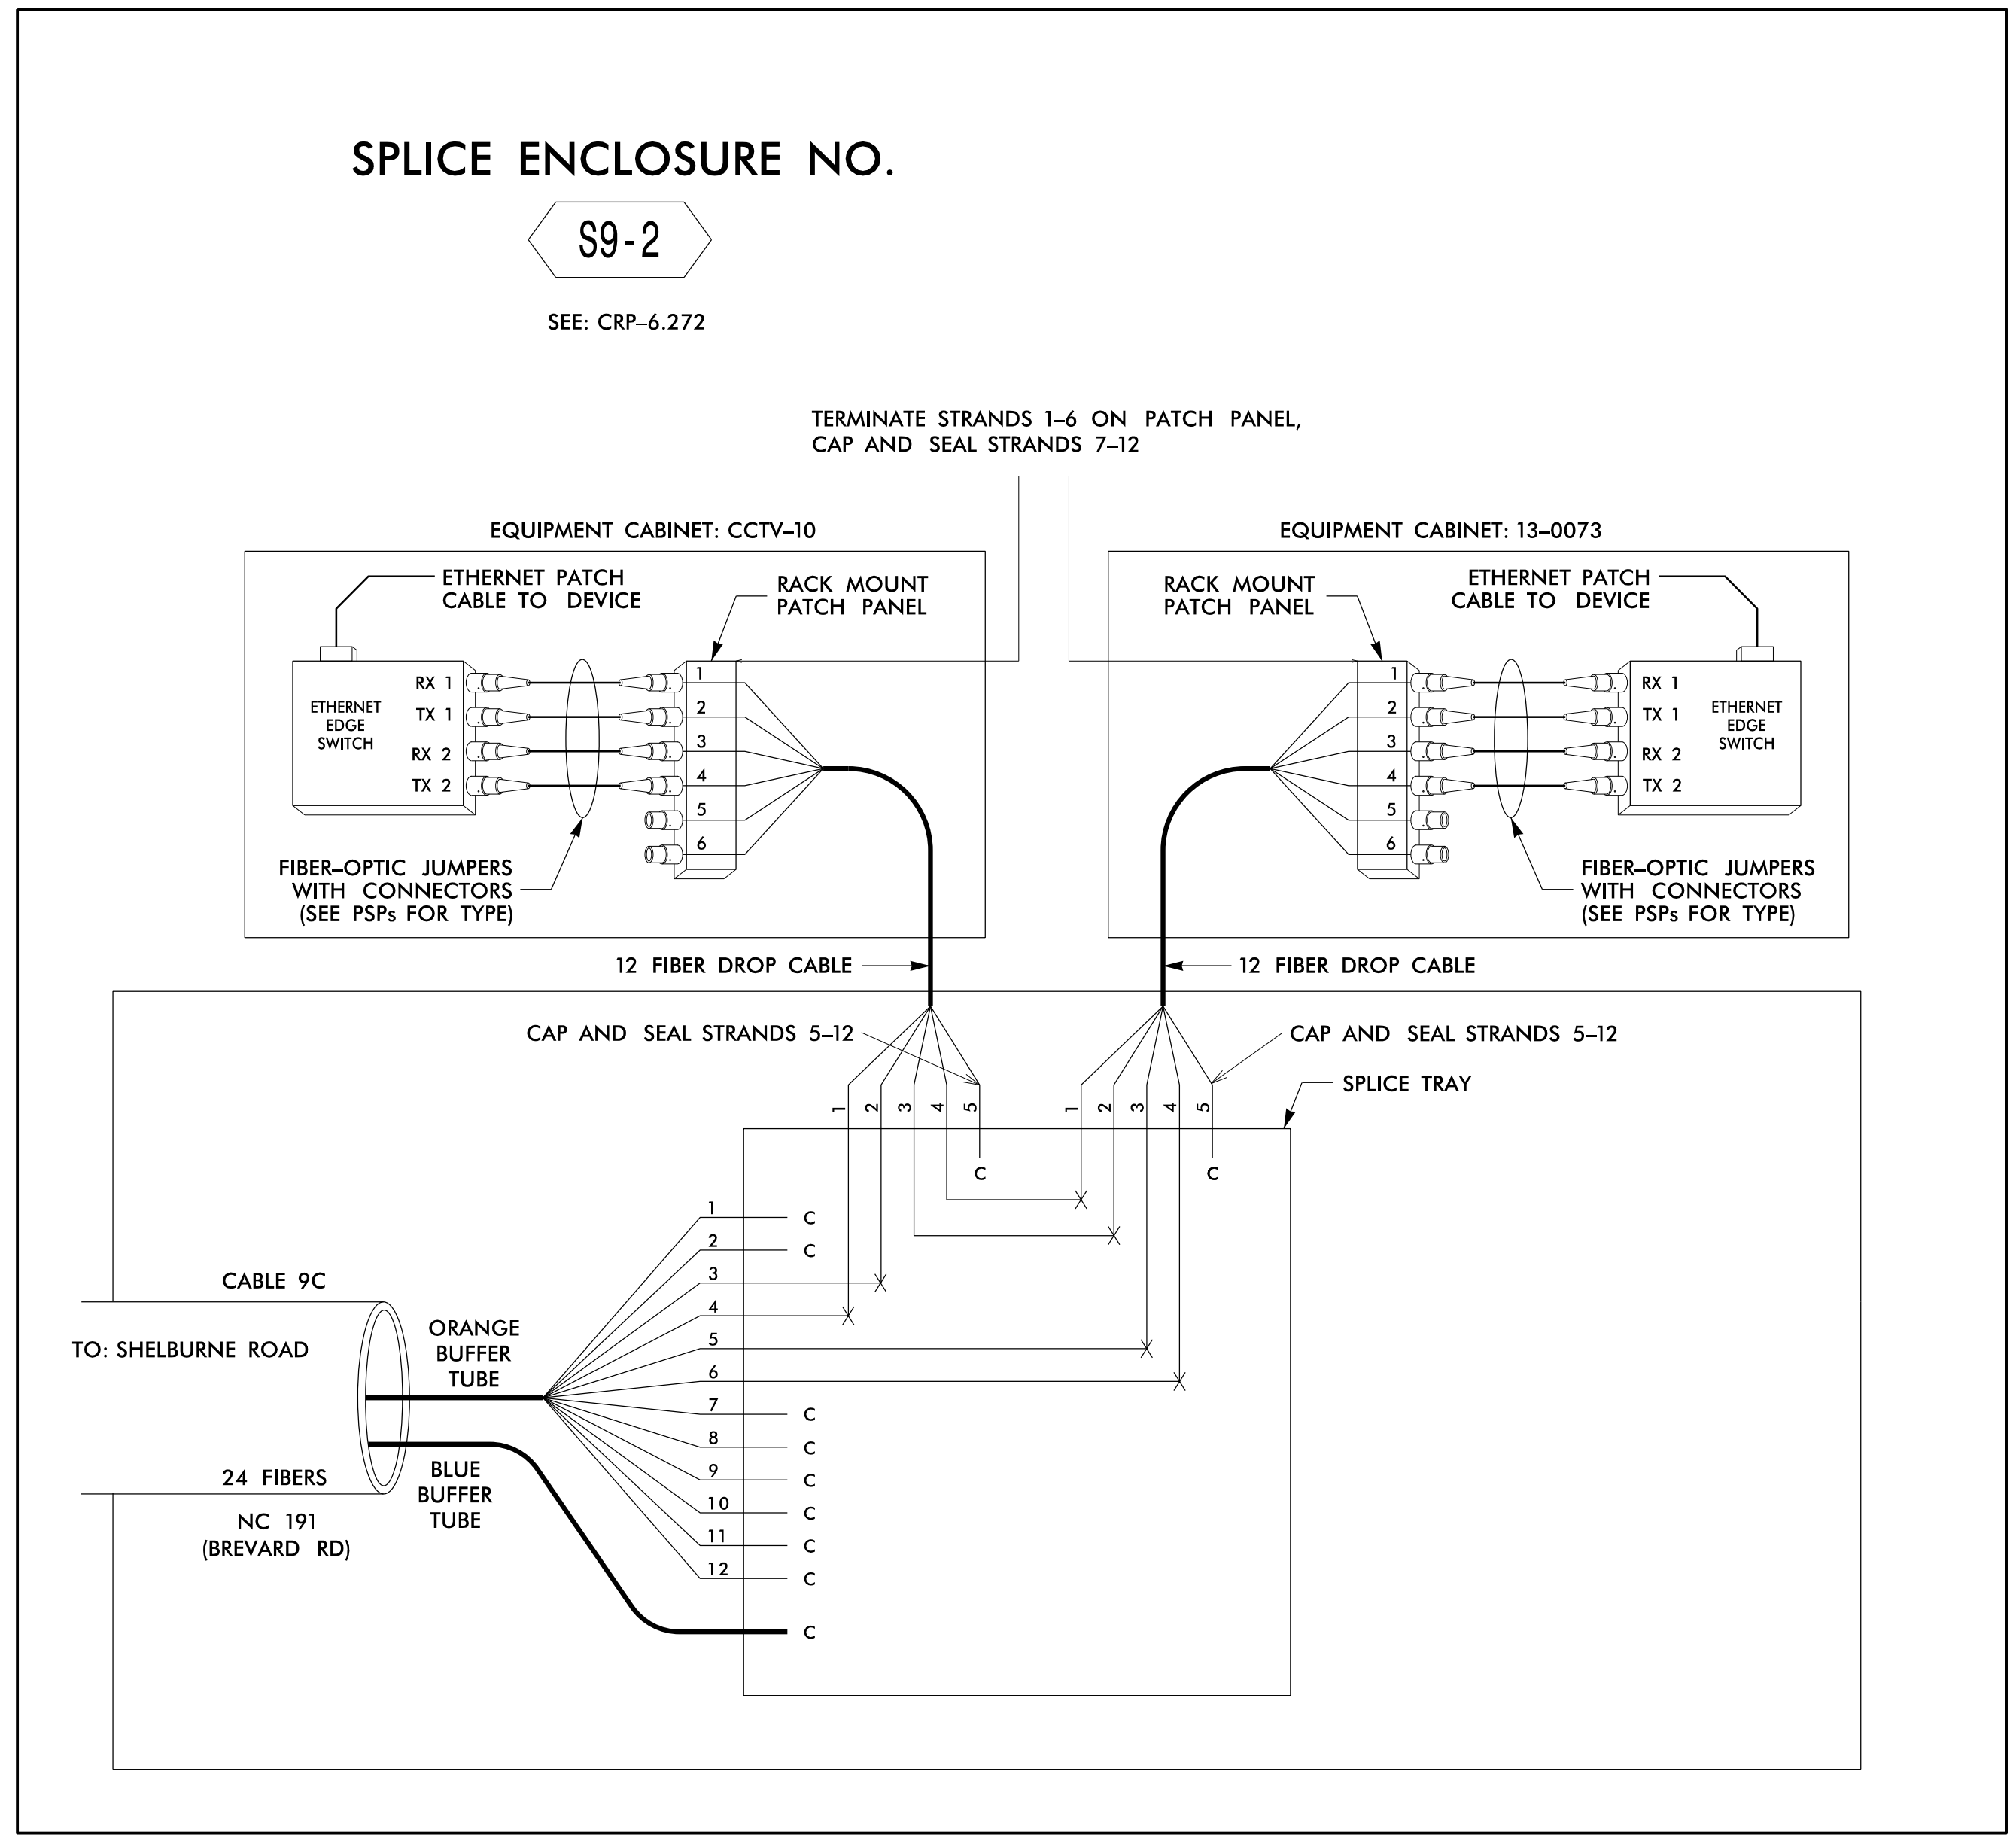

17-JAN-2017 15:03
 D:\projects\transportation\trf\off\c\curr\100048632_U-4715B_Ashville\116_Sig_Sys\Task 11_Comms\Inol_Microstation_Files (Renamed_Merged)\vol\ume_2\271_073_U-4715B_FS-4_31.dgn
 00107303 AT LUS355195

COLOR CODE		LEGEND	
(1) BLUE	(7) RED	X = FUSION SPlice INDIVIDUAL FIBER	
(2) ORANGE	(8) BLACK	C = CAP AND SEAL	
(3) GREEN	(9) YELLOW	EXPRESS = EXPRESS ENTIRE BUFFER TUBE / FIBERS THROUGH WITHOUT CUTTING	
(4) BROWN	(10) VIOLET	BUFFER SPlice = SPlice ALL FIBERS IN BUFFER TUBE COLOR TO COLOR	
(5) SLATE	(11) ROSE		
(6) WHITE	(12) AQUA		

- NOTES**
- UNUSED FIBERS LEFT COILED AND STORED IN SPlice TRAY
 - UNUSED BUFFER TUBES LEFT COILED AND STORED IN SPlice ENCLOSURE
 - EDGE SWITCH CONFIGURATIONS ARE GENERIC. CONTRACTOR IS RESPONSIBLE FOR DETERMINING/ENSURING THE PROPER TERMINATIONS.

1616 EAST MILLBROOK ROAD, SUITE 310
RALEIGH, NORTH CAROLINA 27609
(919) 876-6888 NCBEEES #F-0326

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

 Transportation <small>750 Greenfield Parkway, Garner, NC 27529</small>	Asheville Signal System Fiber-Optic Splicing Details		SEAL
	Division 13 Buncombe County Asheville PLAN DATE: December 2016 REVIEWED BY: HA Badgett PREPARED BY: AM Quigley REVIEWED BY: JT Brooks	REVISIONS INIT. DATE	
SCALE			Designed by: 1/17/2017 DATE

NTS