


TOTAL BILL OF MATERIAL

| BRIDGE | MOBILIZATION | POLLUTION CONTROL | TWO BAR METAL RAIL | REMOVE & RESET EXISTING GUARDRAIL | GUARDRAIL ANCHOR UNITS, TYPE III | SHOTCRETE REPAIRS | EPOXY RESIN INJECTION | PAINTING CONTAINMENT | CP JACKET (NON-MONITORING) | CP JACKET (MONITORING) | PRESTRESSED CONCRETE GIRDER REPAIR | EPOXY COATING | TSA, PARTIAL LENGTH (MONITORING) | TSA, PARTIAL LENGTH (NON-MONITORING) | FRP STRENGTHENING SYSTEM | CLEANING AND PAINTING OF BEARINGS WITH HRCSA | SPLICING OF PRESTRESSING STRAND | RESET BEARINGS | BRIDGE JACKING | BULK ANODE |
|-------------|--------------|-------------------|--------------------|-----------------------------------|----------------------------------|-------------------|-----------------------|----------------------|----------------------------|------------------------|------------------------------------|---------------|----------------------------------|--------------------------------------|--------------------------|--|---------------------------------|----------------|----------------|------------|
| CARTERET #6 | LUMP SUM | LS | LF | LF | EACH | CF | LF | LUMP SUM | LF | LF | CF | SF | SF | SF | SF | EACH | EACH | EACH | EACH | EACH |
| TOTAL | LUMP SUM | LS | 9,190.6 | 912.5 | 4 | 859.4 | 118 | LUMP SUM | 965 | 26 | 219.9 | 2813.6 | 209.3 | 19348 | 560 | 590 | 20 | 3 | 3 | 156 |

PROJECT NO. B-5939
CARTERET COUNTY
 BRIDGE NO. 6

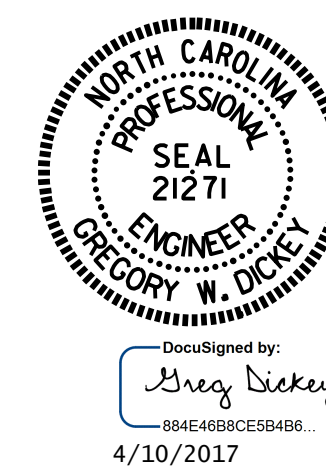

DocuSigned by:
Greg Dickey
984E46BCE5E408
 4/10/2017

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

TOTAL BILL
 OF MATERIAL

DRAWN BY : M.A.LEE DATE : 2/2017
 CHECKED BY : G.W.DICKEY DATE : 2/2017

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

| REVISIONS | | | | | | SHEET NO. |
|-----------|-----|-------|-----|-----|-------|--------------|
| NO. | BY: | DATE: | NO. | BY: | DATE: | TOTAL SHEETS |
| 1 | | | 3 | | | S2-1 |
| 2 | | | 4 | | | |