


EDI MODEL 2018ECLIP-NC CONFLICT MONITOR PROGRAMMING DETAIL

(set switches as shown)

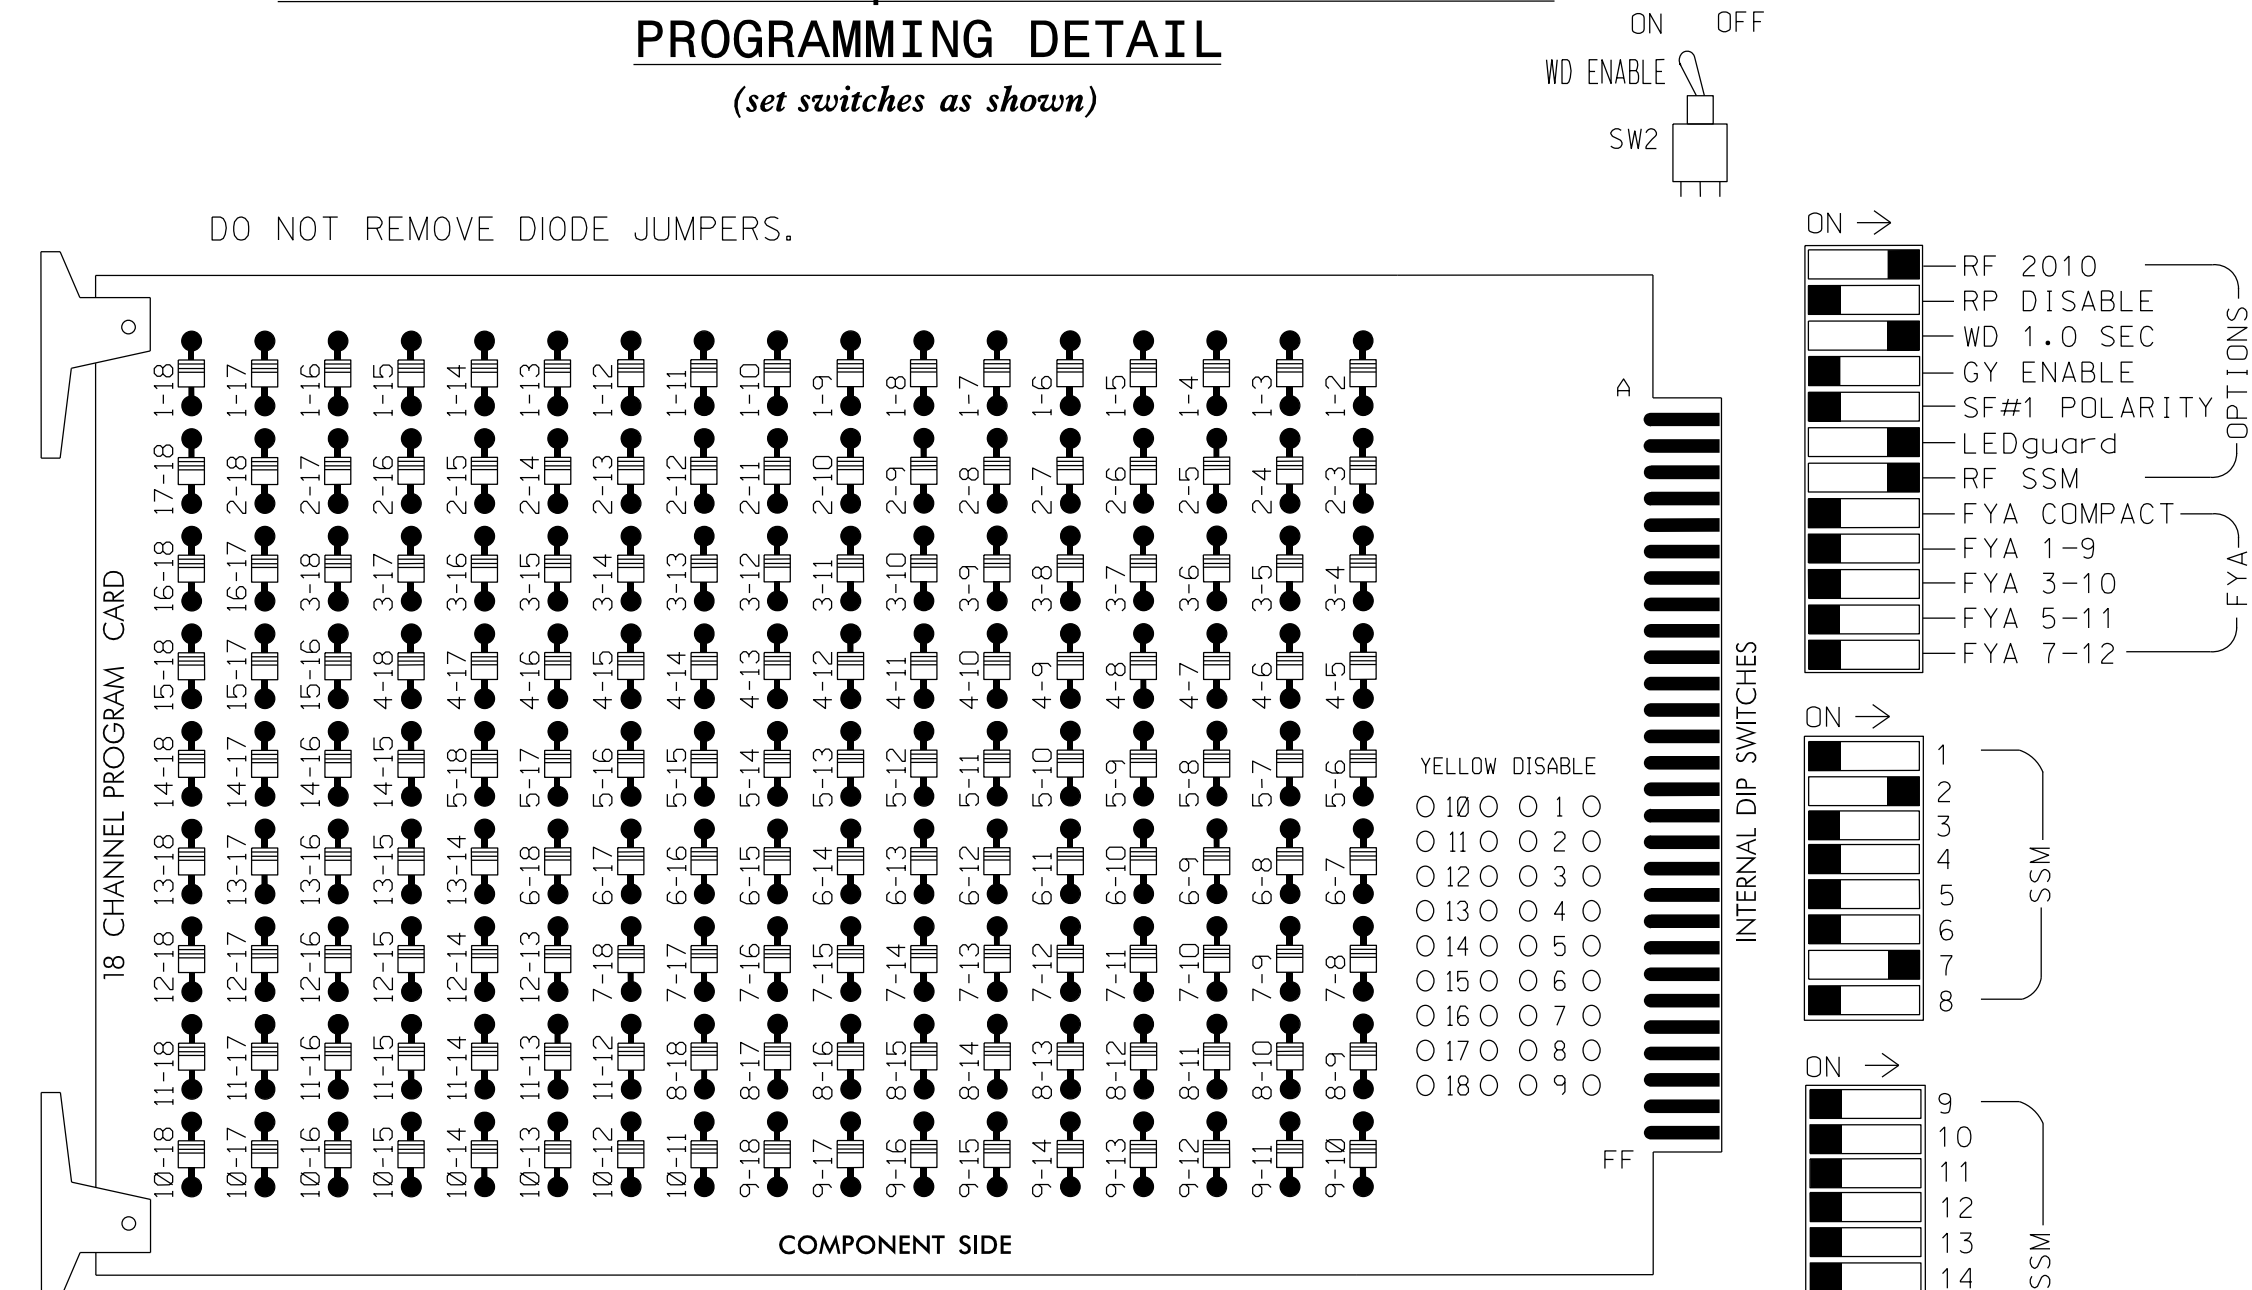

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that Red Enable is active at all times during normal operation.
4. Connect serial cable from conflict monitor to comm. port 1 of 2070 controller. Ensure conflict monitor communicates with 2070.

■ = DENOTES POSITION OF SWITCH

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Enable Simultaneous Gap-Out for all phases.
3. Program phase 2 for Variable Initial and Gap Reduction.
4. Program phase 2 for Start Up In Green.
5. Program phase 2 for Yellow Flash.
6. The cabinet and controller are part of the US 74 - Indian Trail Closed Loop System #1.

EQUIPMENT INFORMATION

CONTROLLER.....2070E
 CABINET.....332 /W/ AUX
 SOFTWARE.....ECONOLITE OASIS
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE*
 LOAD SWITCHES USED.....S2,S10
 PHASES USED.....2,7
 OVERLAPS.....NONE

*INSTALL AUX. OUTPUT FILE FOR FUTURE USE


SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	NU	21,22,23	NU	NU	NU	NU	NU	NU	NU	71,72	NU	NU	NU	NU	NU	NU	NU	NU
RED		128																
YELLOW		129																
GREEN		130																
RED ARROW												122						
YELLOW ARROW												123						
GREEN ARROW												124						

NU = Not Used

INPUT FILE POSITION LAYOUT

(front view)

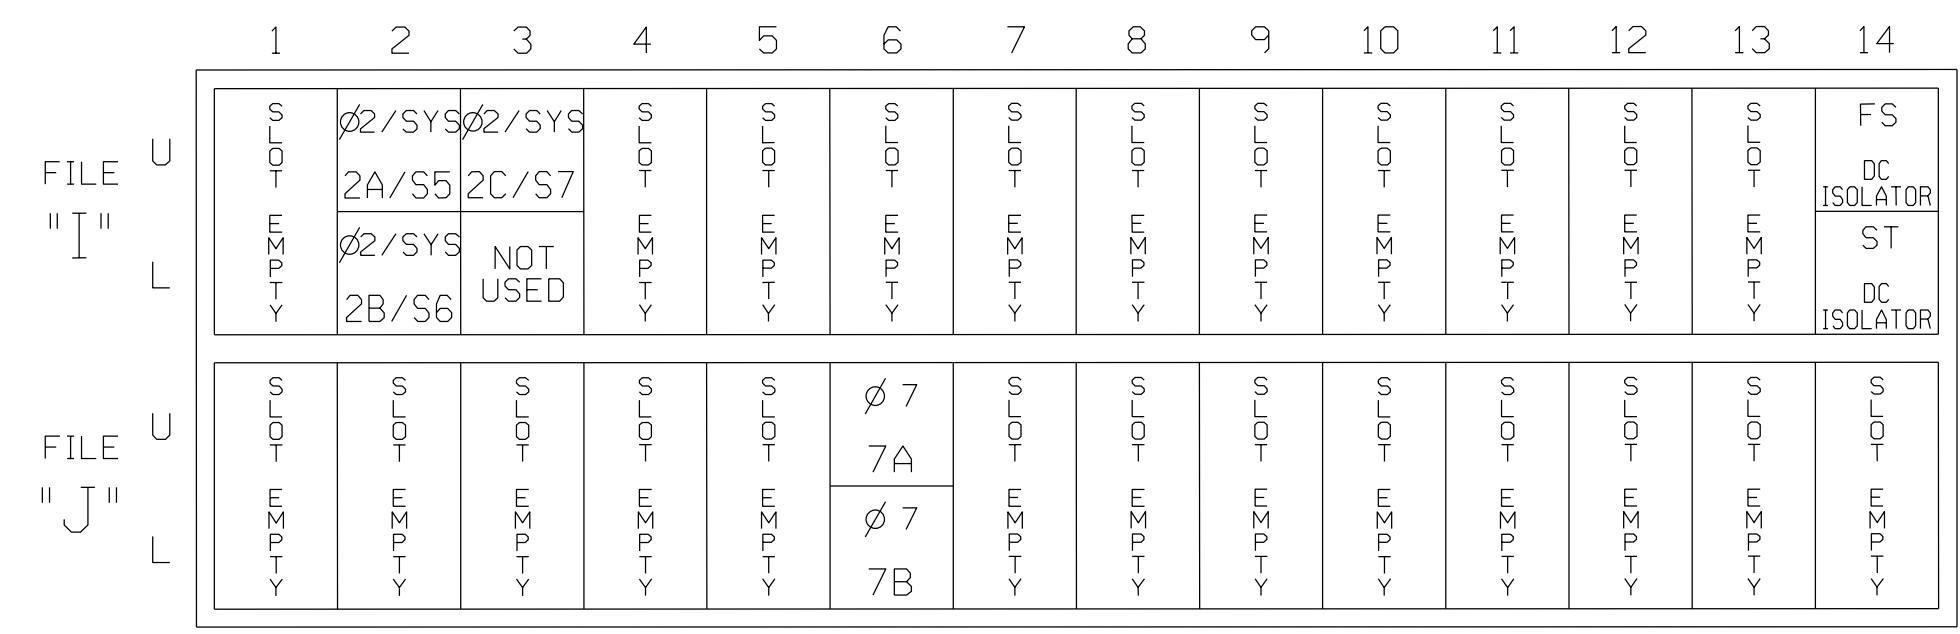


EX. : 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
 ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
2A/S5	TB2-5,6	I2U	39	1	2	2/SYS	Y	Y			
2B/S6	TB2-7,8	I2L	43	5	12	2/SYS	Y	Y			
2C/S7	TB2-9,10	I3U	63	25	32	2/SYS	Y	Y			
7A	TB5-9,10	J6U	42	4	8	7	Y	Y			
7B	TB5-11,12	J6L	46	8	18	7	Y	Y			

INPUT FILE POSITION LEGEND: J2L

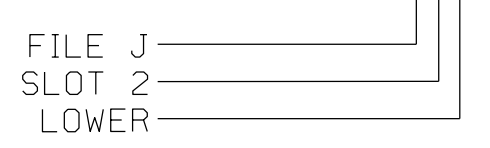

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 10-2182
 DESIGNED: June 2015
 SEALED: August 30, 2016
 REVISED:

09-2016-2016, 14:15
 N:\Projects\2016\09-2016\09-2016.dgn
 C:\Users\lmoore\AT_CAD\PLANTING-W7

ELECTRICAL DETAIL

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

PLANS PREPARED BY:

DRMP
 ENGINEERS • PLANNERS • SCIENTISTS

DRMP, INC.
 5950 FAIRVIEW ROAD, SUITE 320
 CHARLOTTE, NC 28210
 NC LICENSE NO. C-2213 • (704) 332-2289

Prepared for the Offices of:

750 N. Greenfield Pkwy, Garner, NC 27529

US 74 (Independence Blvd) EB at SR 1520 (Indian Trail - Fairview Rd) Westbound U-turn

Division 10 Union County Indian Trail

PLAN DATE: June 2015 REVIEWED BY: L. Moon
 PREPARED BY: D. Ondieki REVIEWED BY: B. Humfleet

REVISIONS	INIT.	DATE

Seal: Lisa M. Moon 12/12/2016

SIG. INVENTORY NO. 10-2182