


6/2/99


PROJECT REFERENCE NO. 1-5839	SHEET NO. 2A-4
ROADWAY DESIGN ENGINEER	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

EROSION CONTROL SOIL STABILIZATION TIMEFRAMES

SITE DESCRIPTION	STABILIZATION TIME	TIMEFRAME EXCEPTIONS
PERIMETER DIKES, SWALES, DITCHES AND SLOPES	7 DAYS	NONE
HIGH QUALITY WATER (HQW) ZONES	7 DAYS	NONE
SLOPES STEEPER THAN 3:1	7 DAYS	IF SLOPES ARE 10' OR LESS IN LENGTH AND ARE NOT STEEPER THAN 2:1, 14 DAYS ARE ALLOWED.
SLOPES 3:1 OR FLATTER	14 DAYS	7 DAYS FOR SLOPES GREATER THAN 50' IN LENGTH.
ALL OTHER AREAS WITH SLOPES FLATTER THAN 4:1	14 DAYS	NONE, EXCEPT FOR PERIMETERS AND HQW ZONES

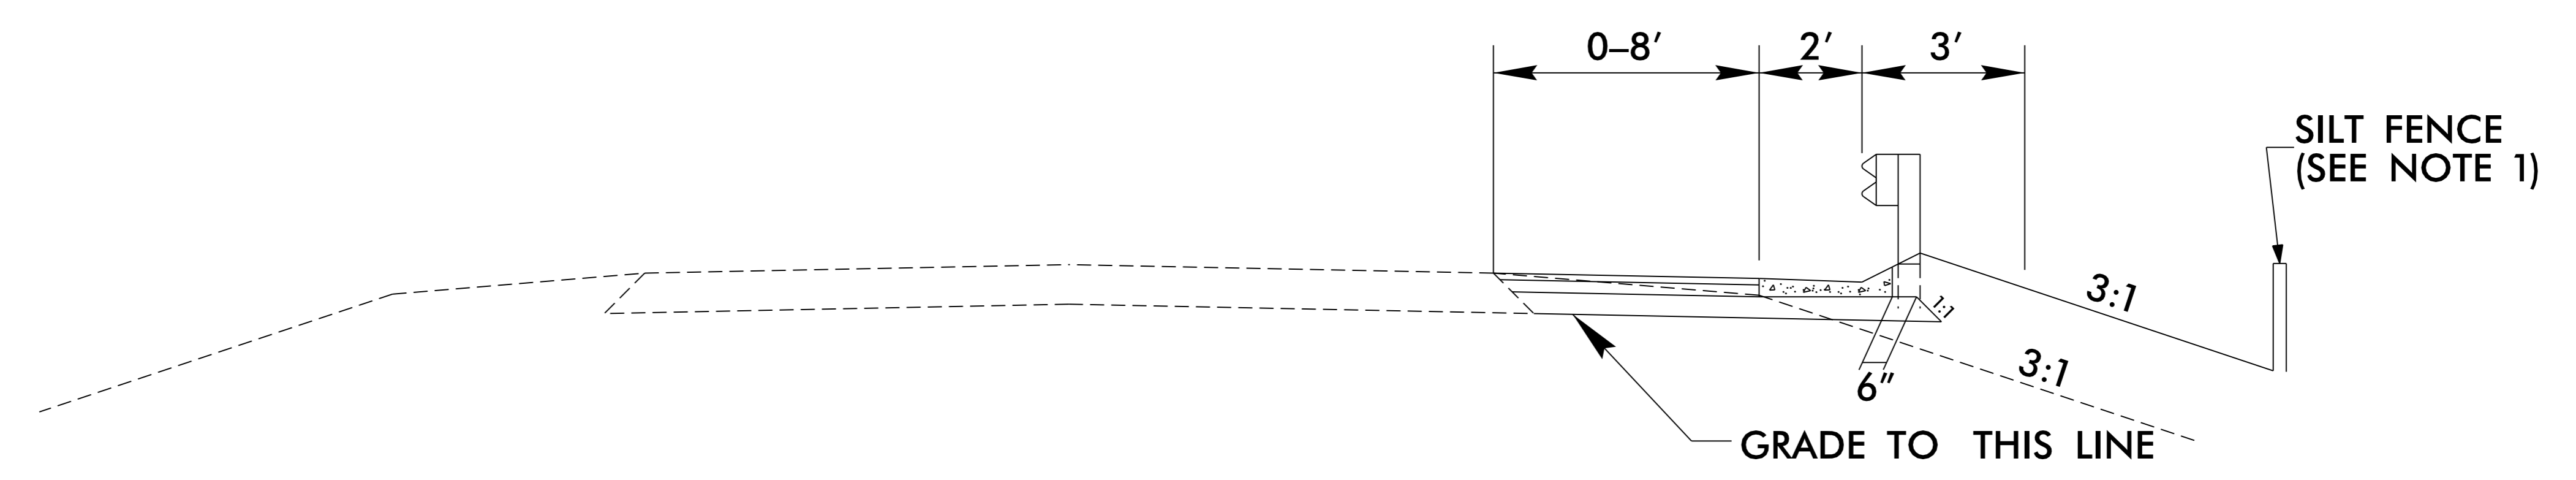

TYPICAL SECTION NO. 8
RAMPS

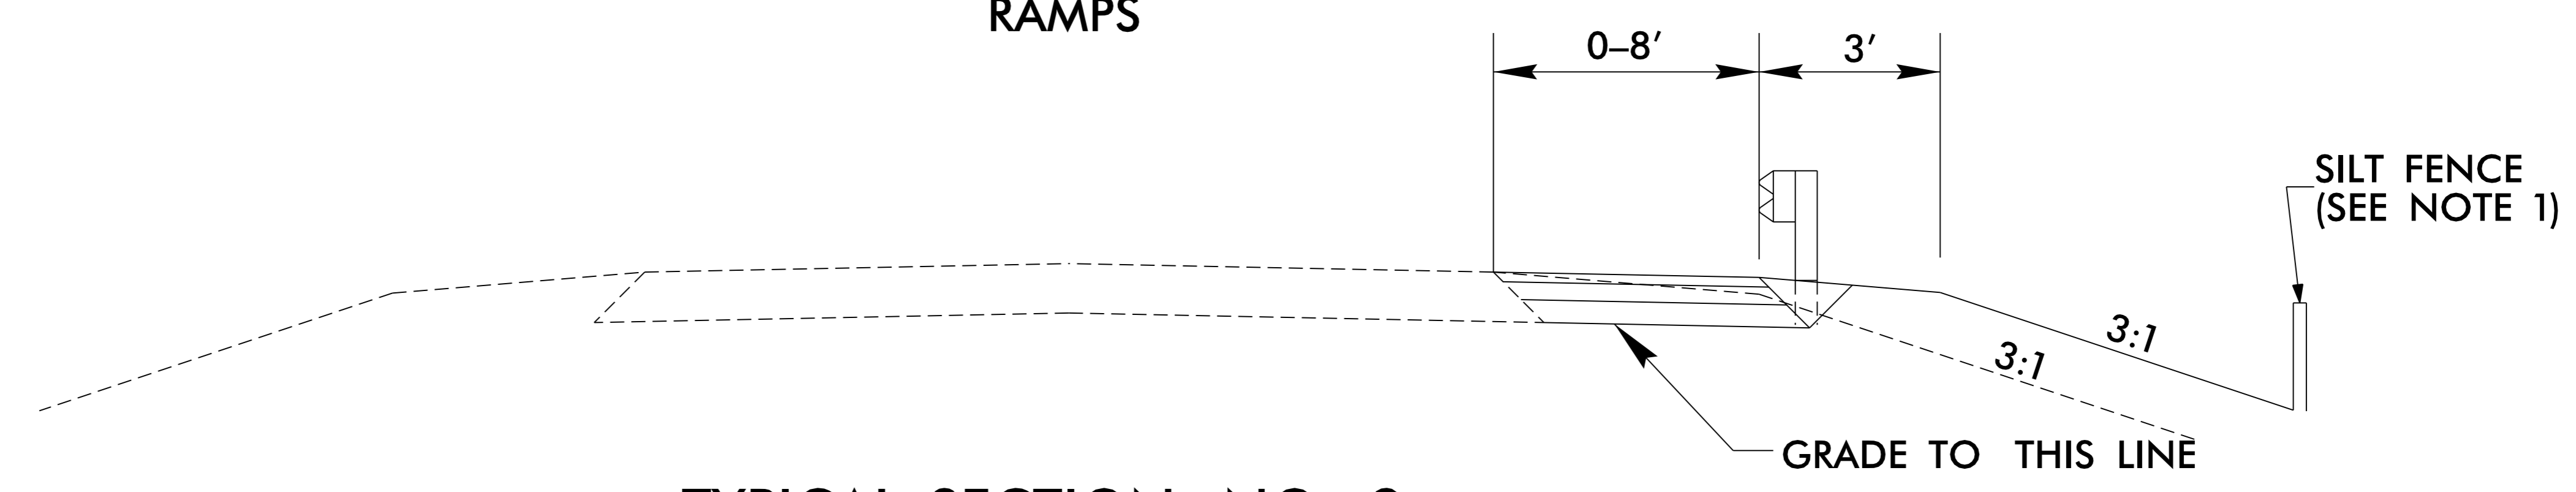

TYPICAL SECTION NO. 9
RAMPS

NOTES

1. INSTALL SILT FENCE AT THE TOE OF THE FILL WHERE PROPOSED FILL SLOPE INTERSECTS WITH THE EXISTING GROUND.
2. INSTALL SPECIAL ROCK SEDIMENT CONTROL FENCE BREAKS A MINIMUM OF EVERY 200 FEET ALONG SILT FENCE.
3. INSTALL ROCK INLET SEDIMENT TRAP TYPE - C AT DROP INLETS OR CATCH BASINS RECEIVING RUNOFF FROM DISTURBED AREAS.
4. INSTALL PIPE INLET SEDIMENT TRAP TYPE - B AT PIPE INLETS RECEIVING RUNOFF FROM DISTURBED AREAS.
5. INSTALL MATTING FOR EROSION CONTROL ON DISTURBED AREAS AS DIRECTED.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100