

CMS NUMBERS 1 & 2

MESSAGE NO. 1	MESSAGE NO. 2
RIVER RD TO CLOSE AT BRIDGE	xxx DAY mmm dd AT hh A(P)M

CHANGEABLE MESSAGE SIGN


(1) (2)

xxx = DAY OF WEEK
mmm = 3 LETTER MONTH ABBREVIATION
dd = NUMERIC DATE
hh = HOUR

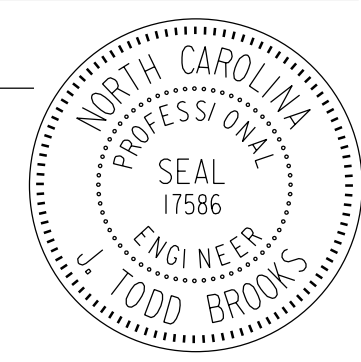

- CHANGEABLE MESSAGE SIGN (CMS) NOTES
- INSTALL PORTABLE CMS ON SHOULDER AT EACH APPROACH TO BRIDGE AS DIRECTED BY THE ENGINEER.
 - DELINEATE CMS WITH A MINIMUM OF 5 DRUMS CONSISTING OF A 4-DRUM APPROACH TAPER PLUS 1 DRUM AT FAR CORNER OF CMS.
 - DISPLAY MESSAGE FOR 7 CALENDAR DAYS PRIOR TO ROAD CLOSURE. REMOVE CMS ONCE ROAD IS CLOSED.

25-MAY-2017 16:21 G:\Transportation\Traffic\NCDOT 10 Bridges\TMP\000053588 - B-5236 TMP Bridge Replace 588\TrafficControl\TCP\B-5236 TMP 04.dgn WILE2054 AT DUS30009

ATKINS 1616 EAST MILLBROOK ROAD, SUITE 160
RALEIGH, NORTH CAROLINA 27609
(919) 876-6888 NCBEES #F-0326

APPROVED: 
DATE: 5/25/2017

SEAL

OFF-SITE DETOUR
DETAILS AND SIGNS
SR 1100
(RIVER ROAD)