



CLEARING AND GRUBBING
 EROSION CONTROL FOR
 CONSTRUCTION SHEET 21

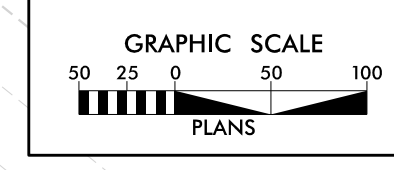

NAD 83/NSRS 2007

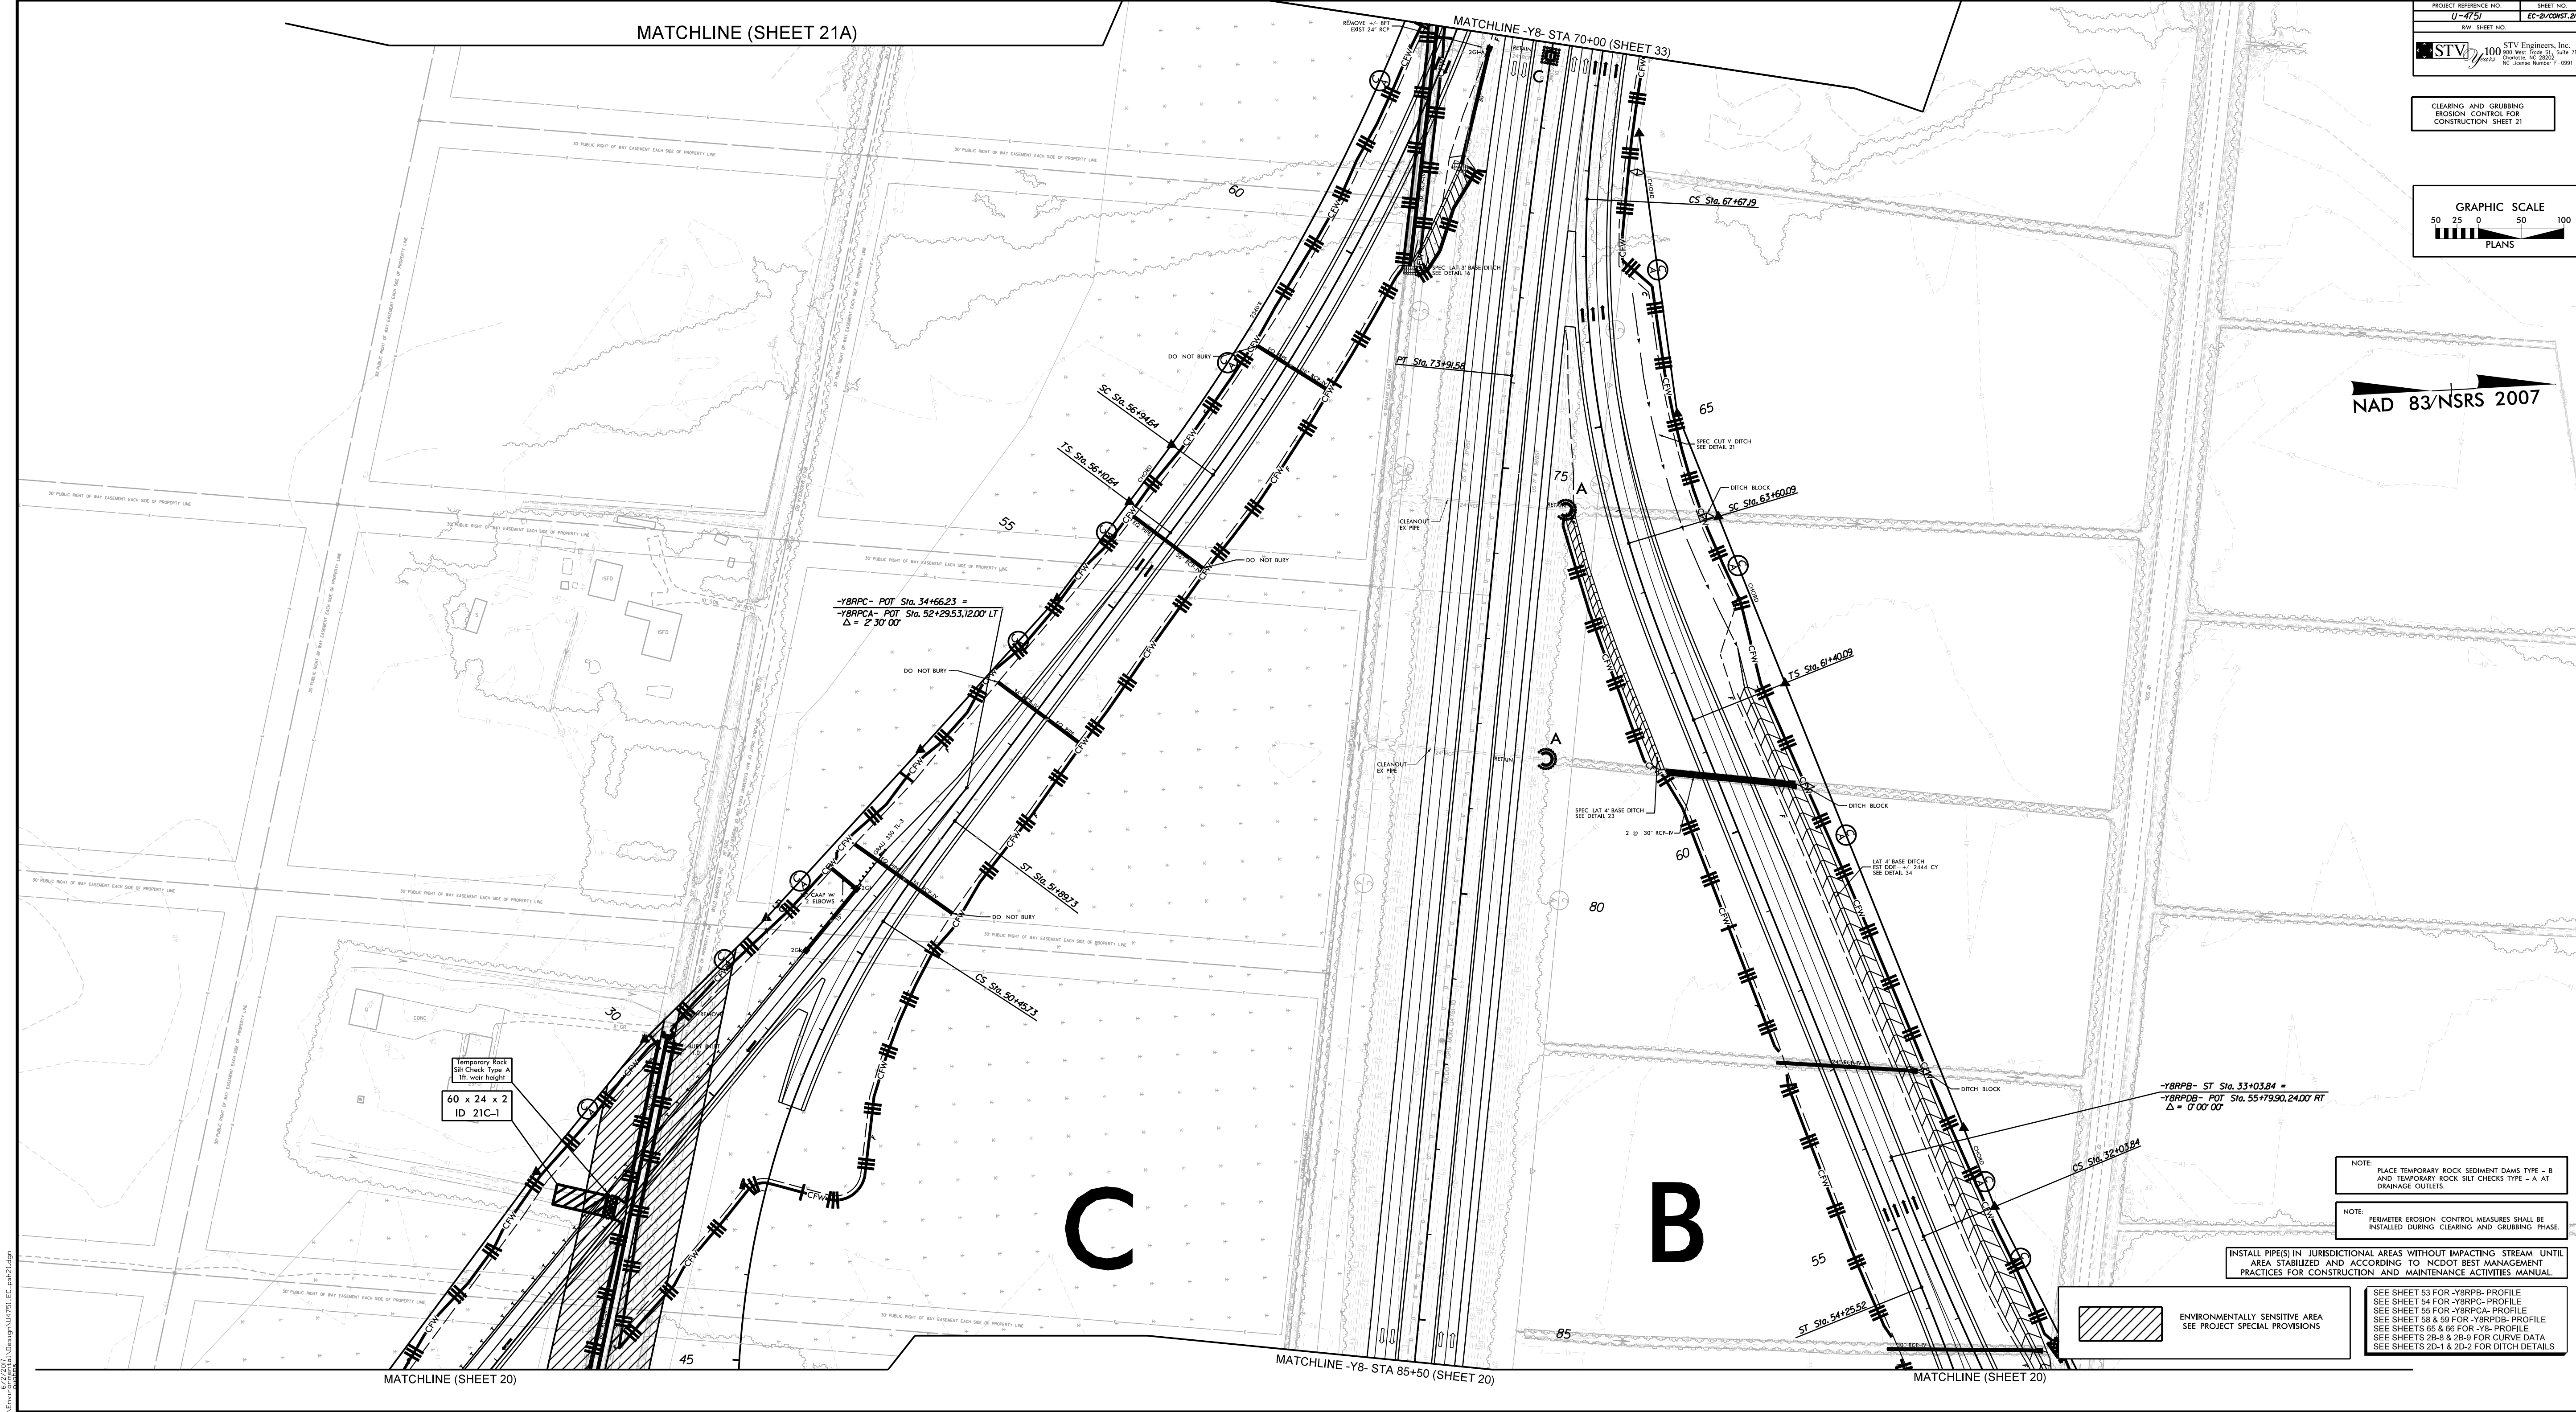

Temporary Rock
 Silt Check Type A
 60 x 24 x 2
 ID 21C-1

-YBRPC- POT Sta. 34+66.23 =
 -YBRPCA- POT Sta. 52+2953.1200 LT
 $\Delta = 2' 30'' 00''$

-YBRPB- ST Sta. 31+0384 =
 -YBRPCB- POT Sta. 55+7990.2400 RT
 $\Delta = 0' 00'' 00''$

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

NOTE: PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.

INSTALL PIPE(S) IN JURISDICTIONAL AREAS WITHOUT IMPACTING STREAM UNTIL AREA STABILIZED AND ACCORDING TO NCDOT BEST MANAGEMENT PRACTICES FOR CONSTRUCTION AND MAINTENANCE ACTIVITIES MANUAL.

ENVIRONMENTALLY SENSITIVE AREA
 SEE PROJECT SPECIAL PROVISIONS

SEE SHEET 53 FOR -YBRPB- PROFILE
 SEE SHEET 54 FOR -YBRPC- PROFILE
 SEE SHEET 55 FOR -YBRPCA- PROFILE
 SEE SHEET 56 & 59 FOR -YBRPCB- PROFILE
 SEE SHEETS 65 & 66 FOR -Y8- PROFILE
 SEE SHEETS 28-8 & 28-9 FOR CURVE DATA
 SEE SHEETS 20-1 & 20-2 FOR DITCH DETAILS

6/25/2024 10:46:34 AM (Storage:\MKT\ELC\proj\21.dwg)