
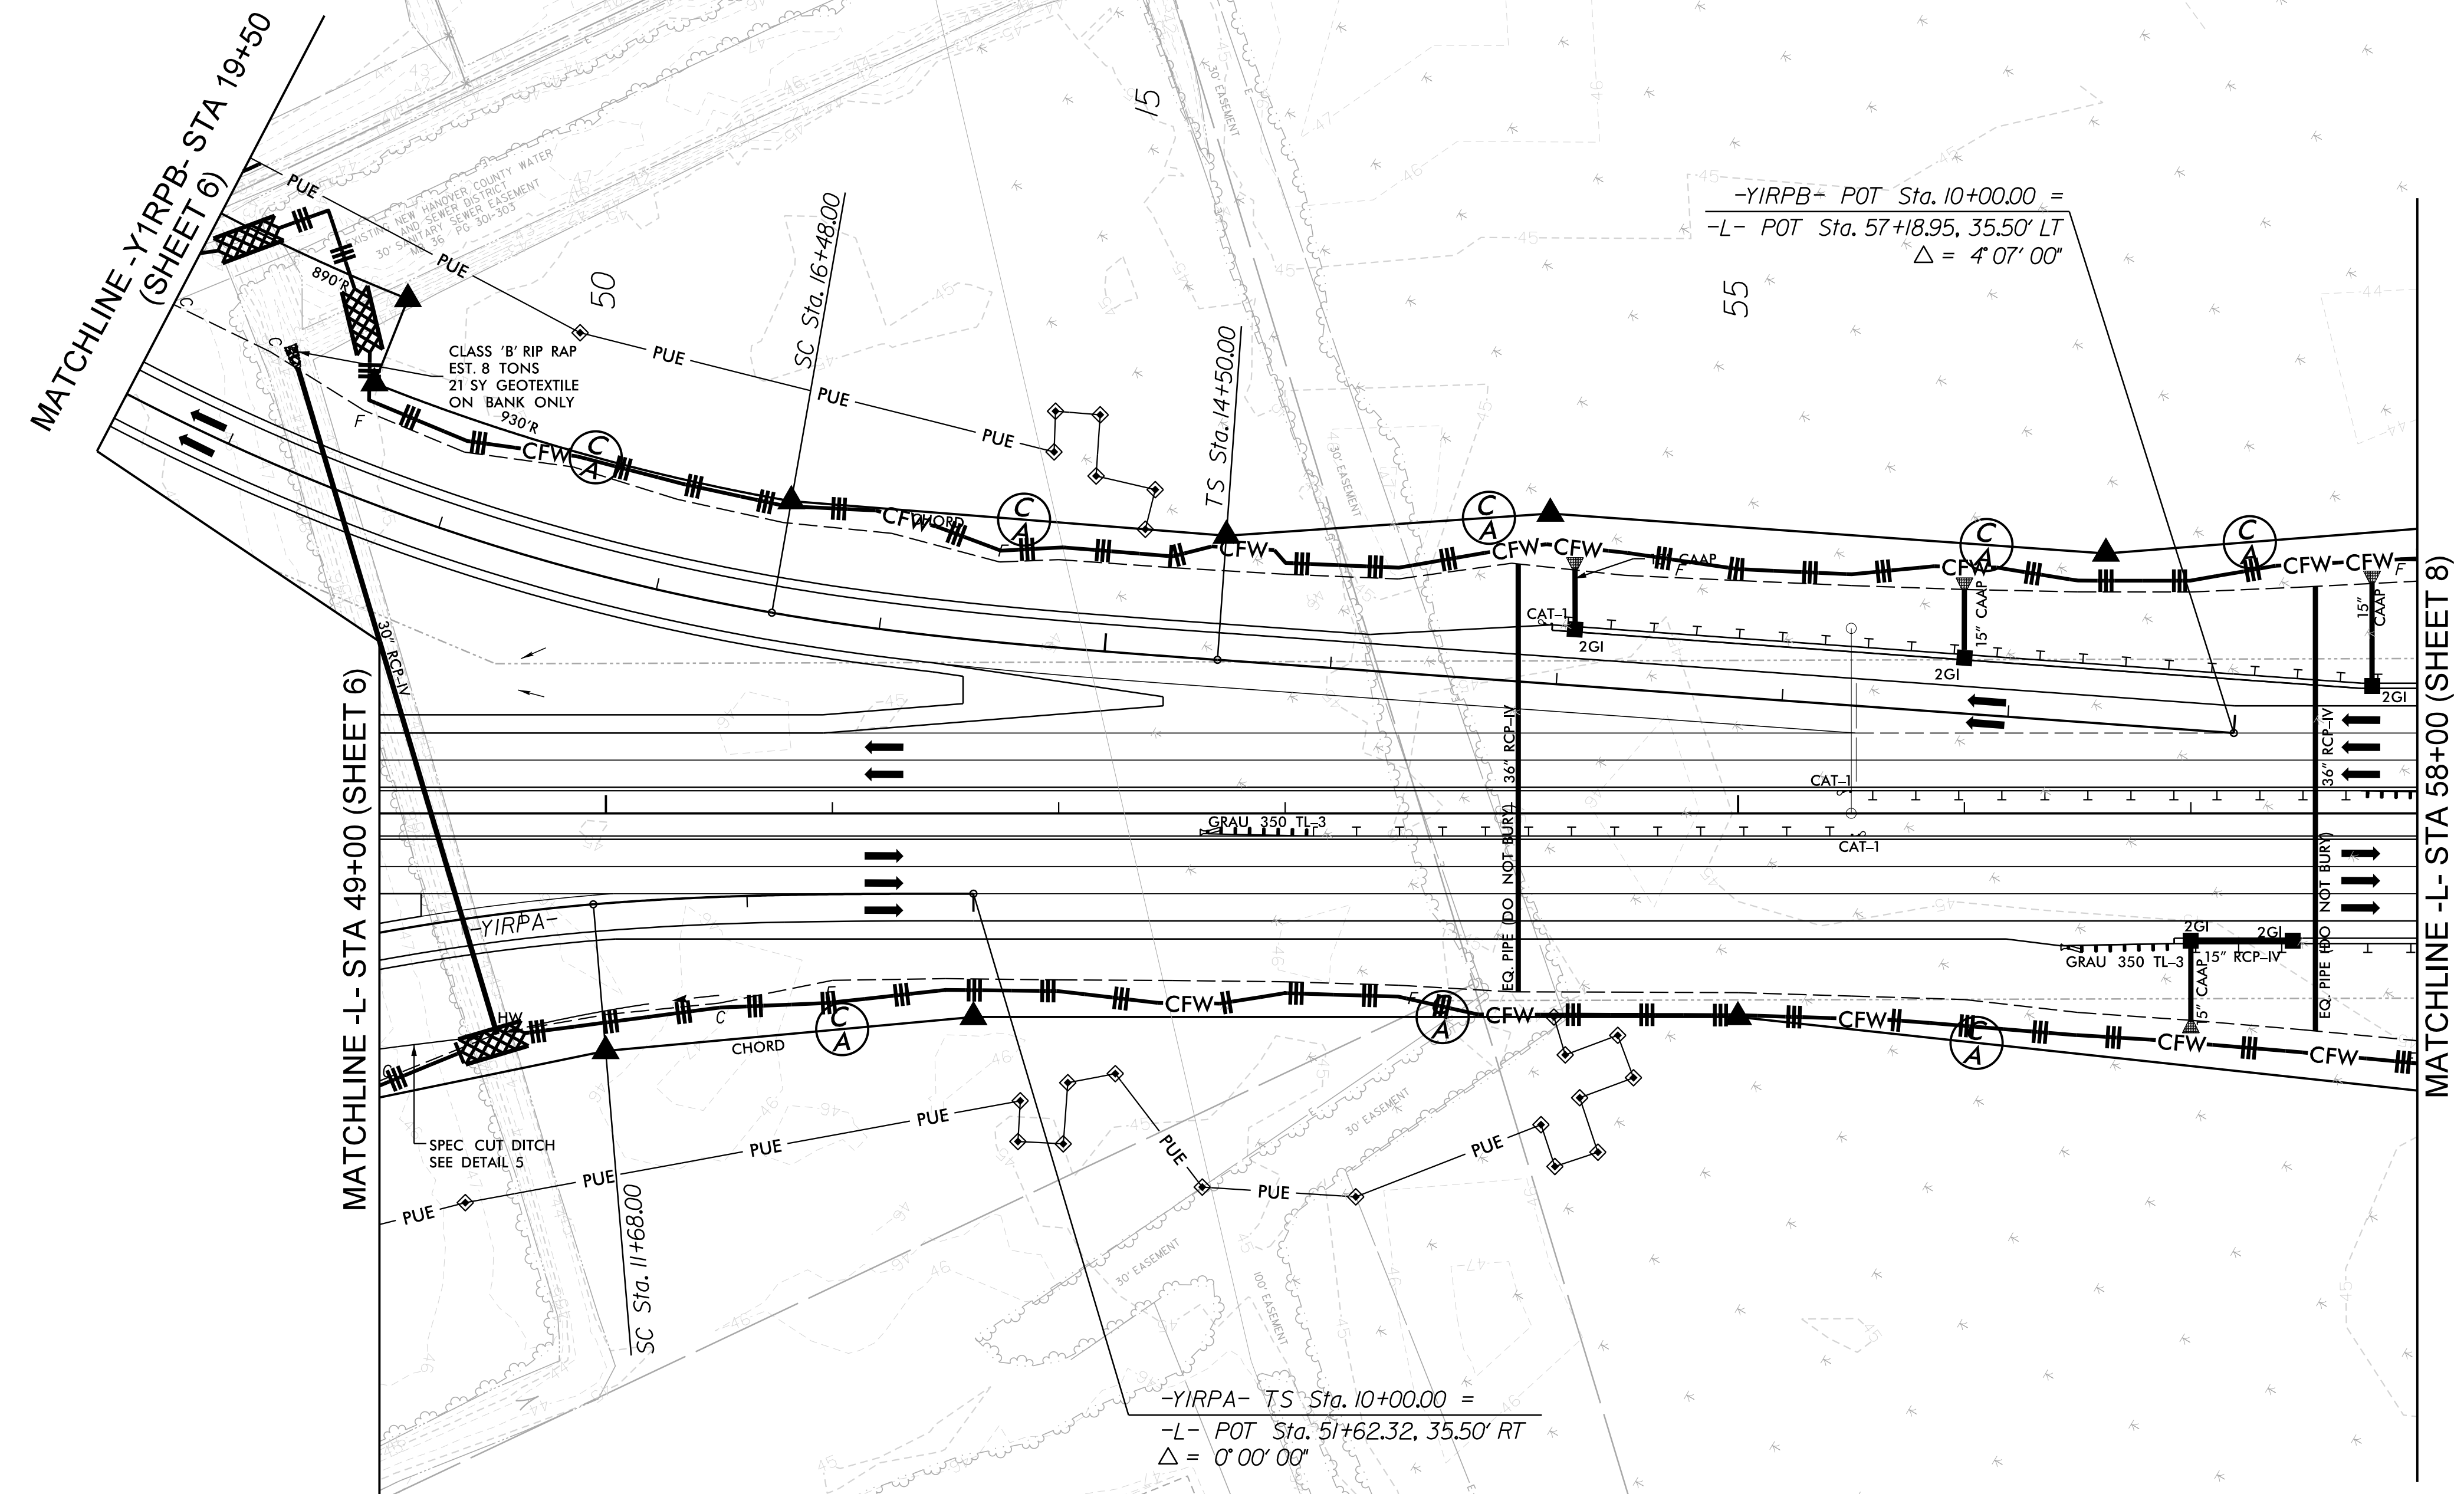


CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 7

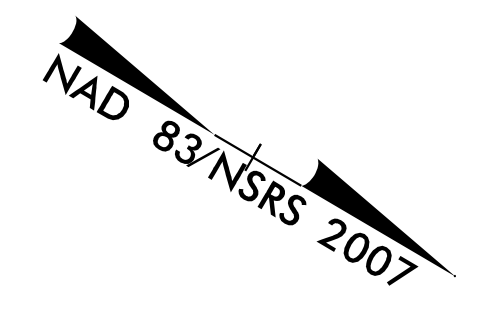

-YIRPB- POT Sta. 10+00.00 =
 -L- POT Sta. 57+18.95, 35.50' LT
 $\Delta = 4' 07'' 00''$

-YIRPA- TS Sta. 10+00.00 =
 -L- POT Sta. 51+62.32, 35.50' RT
 $\Delta = 0' 00'' 00''$

NOTE:
 PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B
 AND TEMPORARY ROCK SILT CHECKS TYPE - A AT
 DRAINAGE OUTLETS.

NOTE:
 PERIMETER EROSION CONTROL MEASURES SHALL BE
 INSTALLED DURING CLEARING AND GRUBBING PHASE.

SEE SHEET 36 FOR -L- PROFILE
 SEE SHEET 49 FOR -Y1RPA- PROFILE
 SEE SHEET 51 FOR -Y1RPB- PROFILE
 SEE SHEET 2B-8 FOR CURVE DATA
 SEE SHEETS 2D-1 & 2D-2 FOR DITCH DETAILS