

**This electronic collection of documents is provided  
for the convenience of the user  
and is Not a Certified Document –**


**The documents contained herein were originally issued  
and sealed by the individuals whose names and license  
numbers appear on each page, on the dates appearing  
with their signature on that page.**

**This file or an individual page  
shall not be considered a certified document.**

**STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION**

**SIGNING PLAN  
YANCEY COUNTY**

**LOCATION: REPLACE BRIDGE No. 3 OVER POSSUM TROT CREEK  
ON SR 1128**

PROJECT REFERENCE NO. <b>B-4848</b>	SHEET NO. <b>SIGN-1</b>
Designed by: <i>Renee B. Roach</i>	
APPROVED: _____	
DATE: 9/28/2017	
SEAL 	
<b>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</b>	

**T.I.P.: B-4848**

**CONTRACT: C203726**

**SUMMARY OF QUANTITIES**

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4025000000	901	CONTRACTOR FURNISHED, TYPE E SIGN	47.5	S.F.
4025000000	901	CONTRACTOR FURNISHED, TYPE F SIGN	8.19	S.F.
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	145	L.F.
4102000000	904	SIGN ERECTION, TYPE E	12	EA.
4108000000	904	SIGN ERECTION, TYPE F	1	EA.
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE D (GROUND MOUNTED)	1	EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	13	EA.
4192000000	907	DISPOSAL OF SUPPORT, U-CHANNEL	1	EA.

**GENERAL NOTES**

- . SIGNS FURNISHED BY CONTRACTOR.
- . CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- . ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

**ROADWAY STANDARD DRAWING**

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS


**INDEX**


SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET
SIGN-2	"E" AND "F" SIGNS
SIGN-3	SIGN DETAIL SHEET

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT


\_\_\_\_\_  
KELVIN JORDAN      SIGNING & DELINEATION REGIONAL ENGINEER

\_\_\_\_\_  
DERRICK BEARD      SIGNING & DELINEATION PROJECT DESIGN ENGINEER

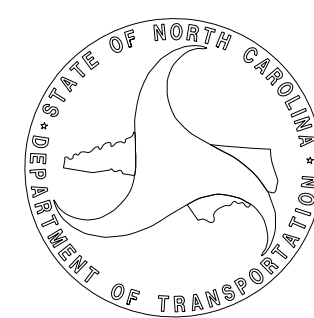

PROJECT REFERENCE NO. <b>B-4848</b>	SHEET NO. <b>SIGN-2</b>
APPROVED: <i>Renee B. Roach</i> <small>—Designed by— B3CR06FFCF4840D...</small>	
DATE: 9/28/2017	
SEAL 	
<b>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</b>	


401 QUANTITY REQ'D   1  

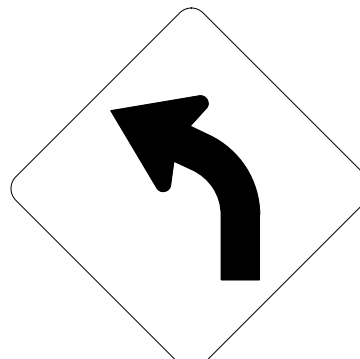

30" X 30"  
W1-2L

ONE "U" POST PER SIGN


406 QUANTITY REQ'D   3  

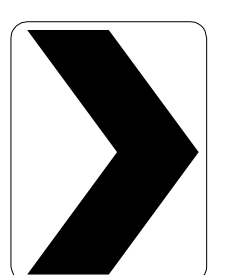


18" X 24"  
W1-8R

ONE "U" POST PER SIGN


501



1-24" X 12"




1-24" X 24"



1-21" X 15"

ONE "U" POST PER SIGN


402 QUANTITY REQ'D   1  

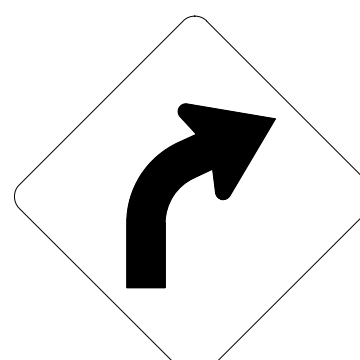

30" X 30"  
W1-2R

ONE "U" POST PER SIGN


407 QUANTITY REQ'D   1  

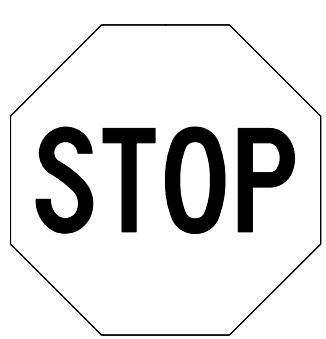

30" X 30"  
R1-1

ONE "U" POST PER SIGN

403 QUANTITY REQ'D   2  




18" X 18"  
W13-1P

- MOUNT BELOW SIGN 401  
  IN ONE ASSEMBLY

- MOUNT BELOW SIGN 402  
  IN ONE ASSEMBLY


404 QUANTITY REQ'D   1  

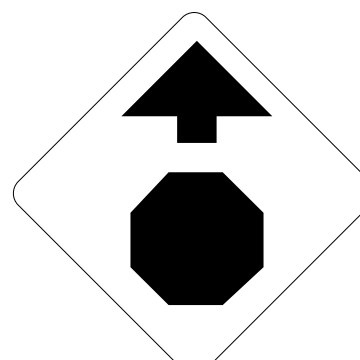

30" X 30"  
W3-1

ONE "U" POST PER SIGN

405 QUANTITY REQ'D   3  


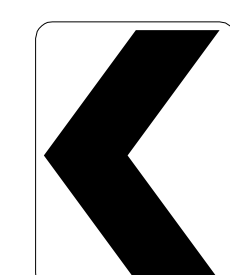


18" X 24"  
W1-8L

ONE "U" POST PER SIGN

**TYPE "E" & "F" SIGNS**

09/27/17  
 P:\Projects-B\B4848-Traffic\Signing\CADD\Signing Layout Plans\B-4848-SIGN-2.dgn  
 Jseribbeard

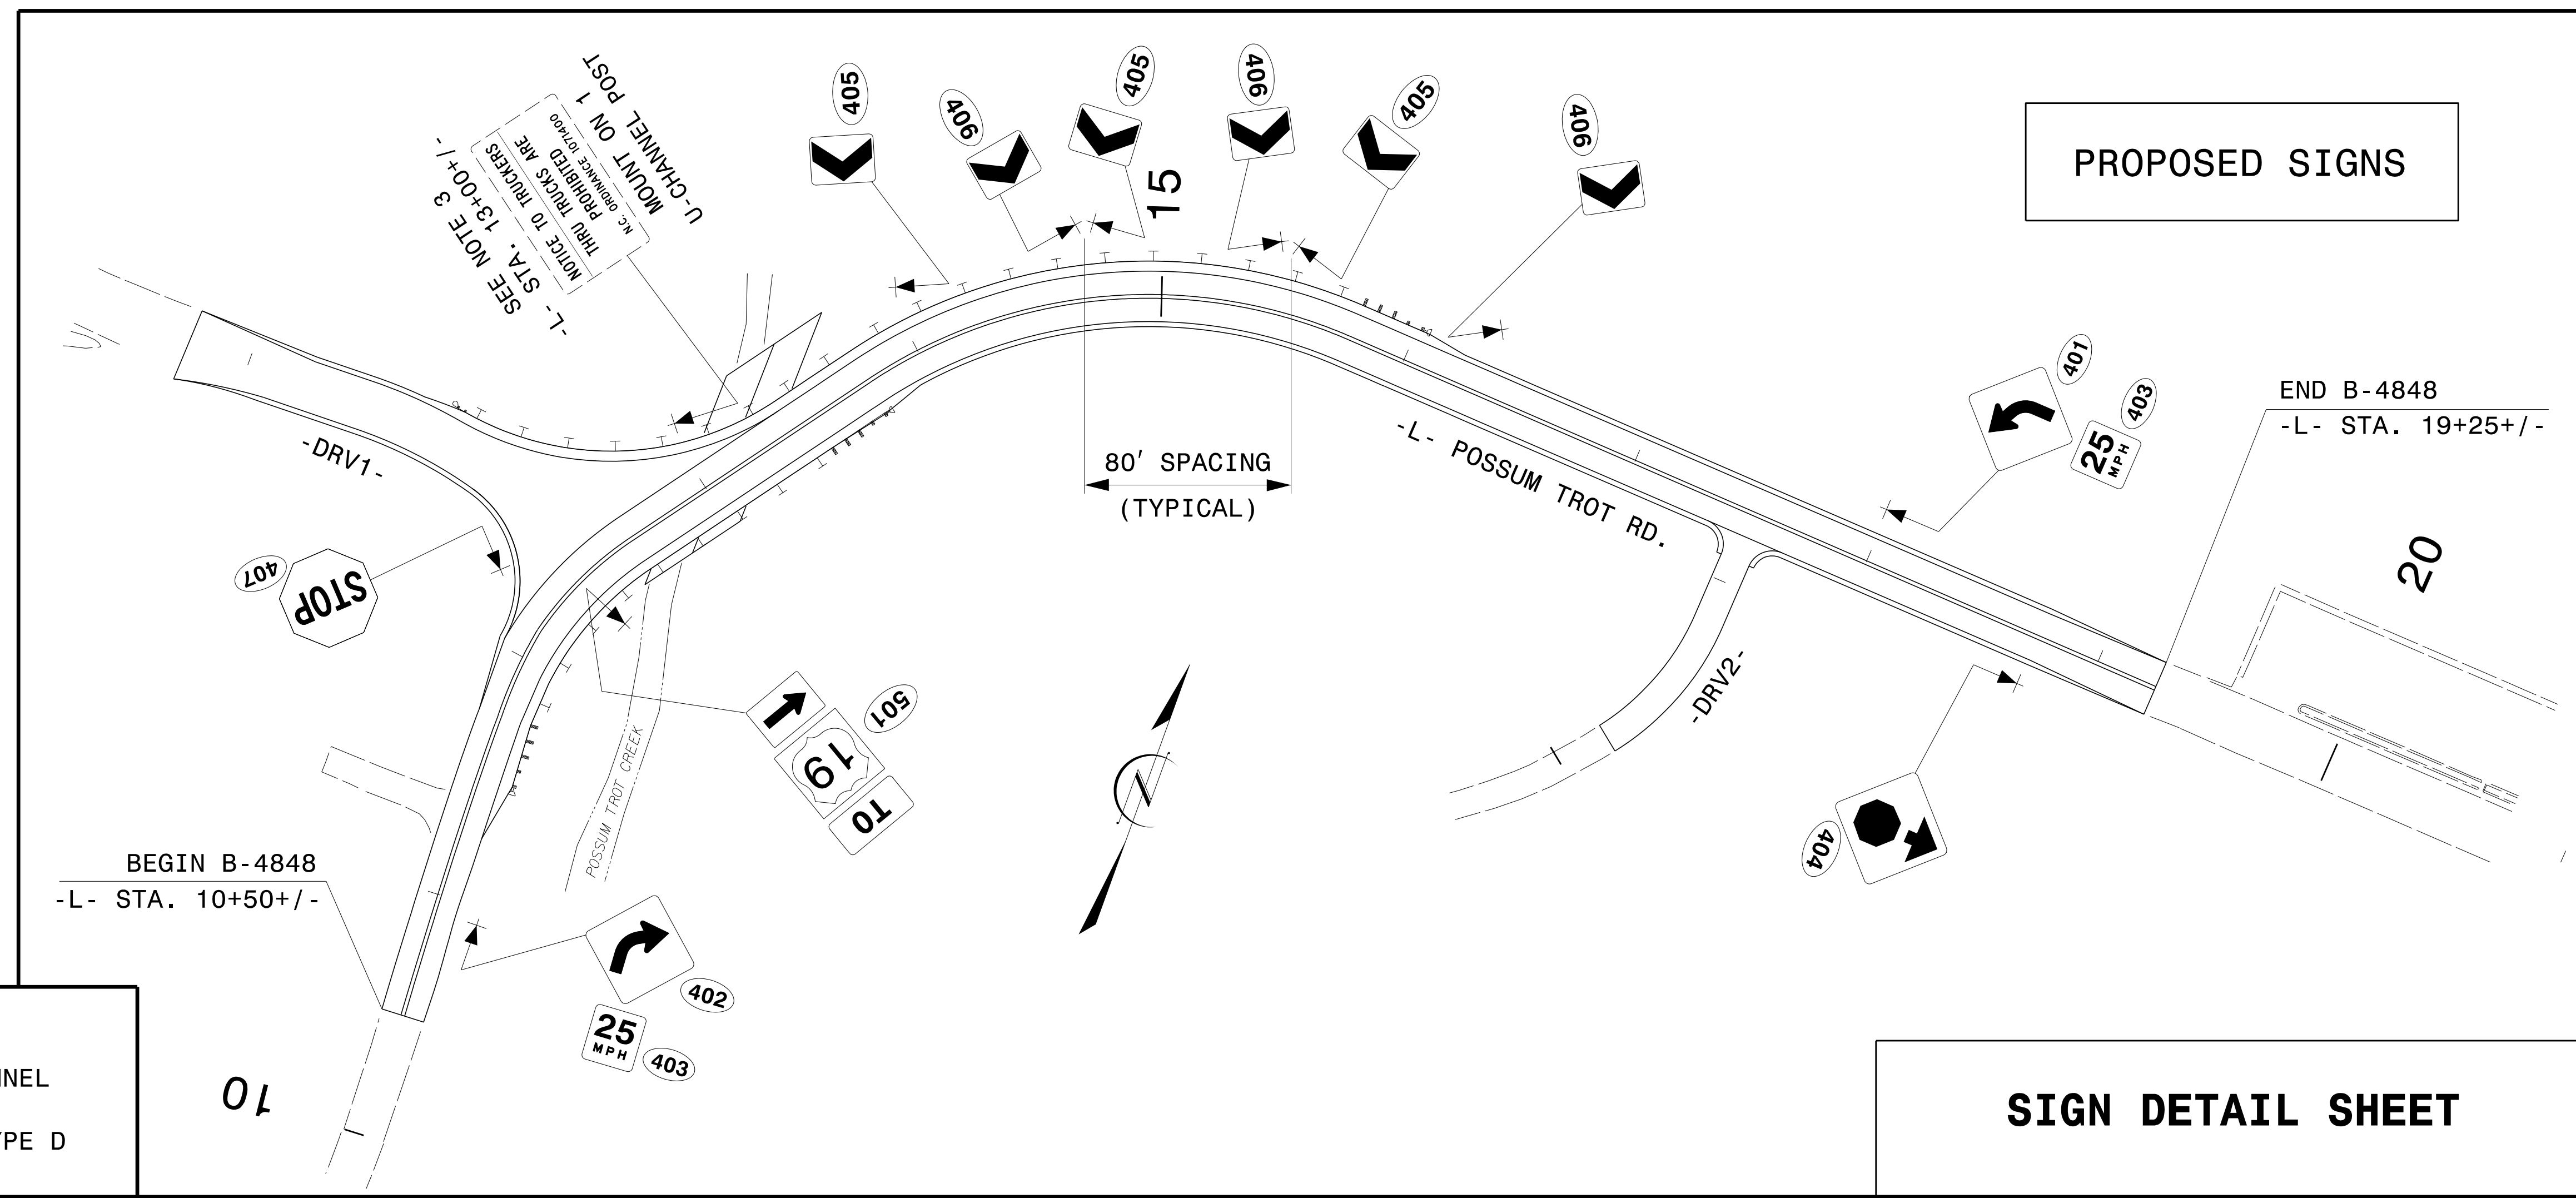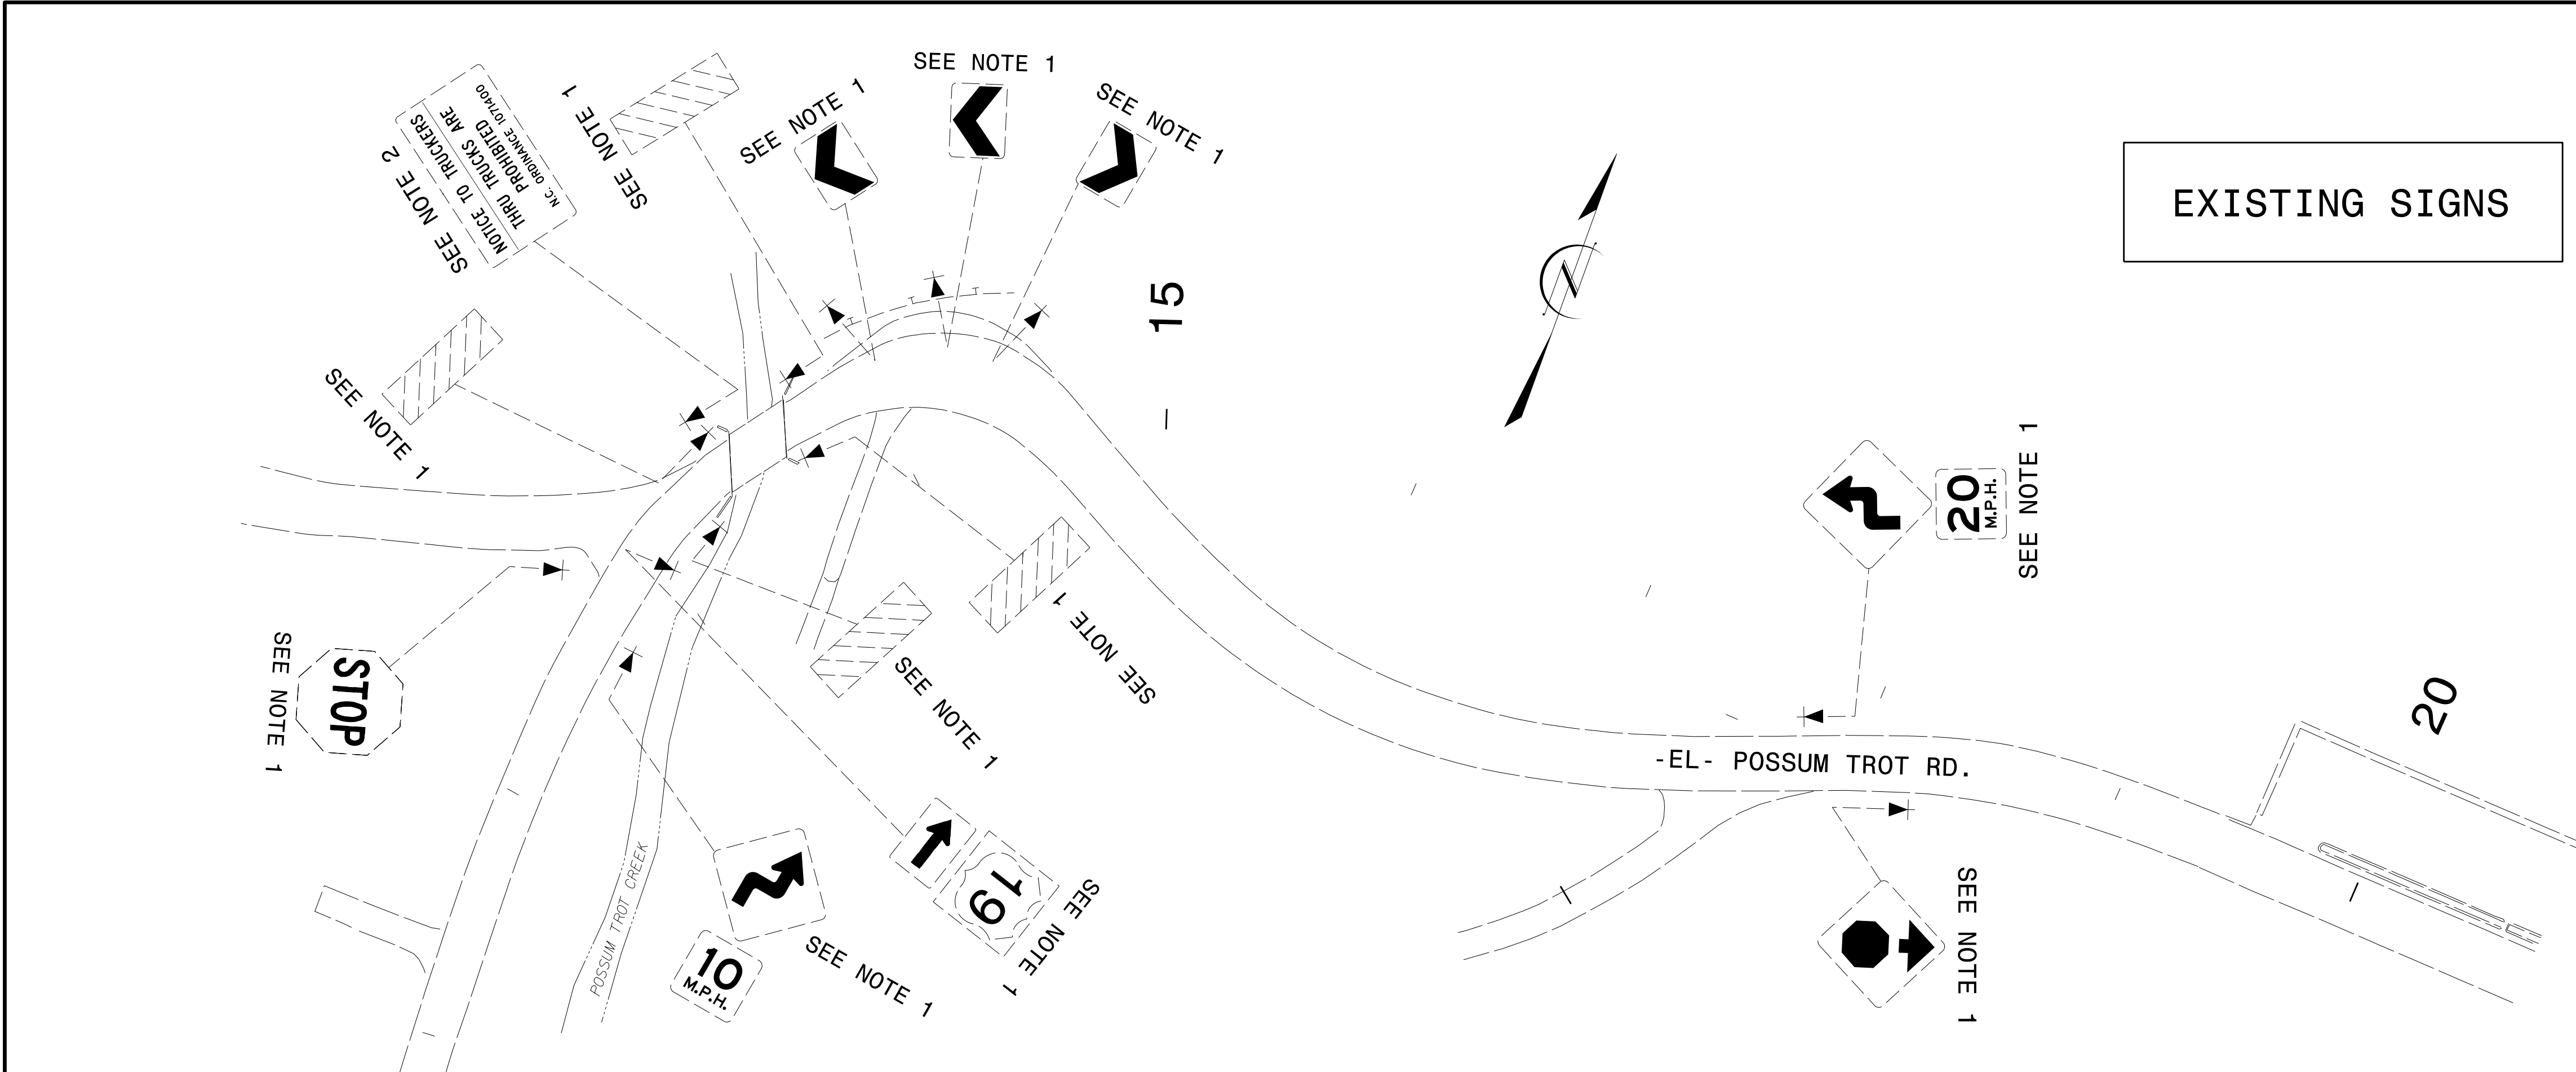

**NOTES:**

1. DISPOSAL OF SIGN SYSTEM, U-CHANNEL
2. DISPOSAL OF SUPPORT, U-CHANNEL
3. SIGN ERECTION, RELOCATE SIGN TYPE D

**SIGN DETAIL SHEET**

09/27/17  
 P:\Projects-B\B4848\Traffic\Signing\CADD\Signing Layout Plans\B-4848-SIGN-3.dgn  
 Jseaboard