

**This electronic collection of documents is provided
for the convenience of the user
and is Not a Certified Document –**

**The documents contained herein were originally issued
and sealed by the individuals whose names and license
numbers appear on each page, on the dates appearing
with their signature on that page.**

**This file or an individual page
shall not be considered a certified document.**

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

SIGNING PLAN
ANSON COUNTY

LOCATION: BRIDGE 8 OVER BROWN CREEK ON SR 1627
PINKSTON RIVER ROAD

| | |
|--|---------------------|
| PROJECT REFERENCE NO. B-2506 | SHEET NO. SIGN-1 |
| APPROVED: <i>Ron King</i> 0695DTAB77CADC... | |
| DATE: 6/21/2016 | |
| SEAL | |
| | |
| DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED | |

T.I.P.: B-2506

CONTRACT: C203790

SUMMARY OF QUANTITIES

| ITEM NO. | DESC. NO. | SECT. NO. | ITEM DESCRIPTION | QUANTITY | UNIT |
|------------|-----------|-----------|--|----------|------|
| 4072000000 | 903 | | SUPPORTS, 3 LB STEEL U-CHANNEL | 36 | L.F. |
| 4096000000 | 904 | | SIGN ERECTION, TYPE D | 2 | EA. |
| 4116100000 | 904 | | SIGN ERECTION, RELOCATE SIGN TYPE E (GROUND MOUNTED) | 2 | EA. |
| 4155000000 | 907 | | DISPOSAL OF SIGN SYSTEM, U-CHANNEL | 10 | EA. |

PAY ITEM NOTES

- DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- SIGN ERECTION, RELOCATE SIGN TYPE E


GENERAL NOTES

- SIGNS FURNISHED BY STATE
- CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

ROADWAY STANDARD DRAWING


THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

- 903.10 GROUND MOUNTED SIGN SUPPORTS
- 904.10 ORIENTATION OF GROUND MOUNTED SIGNS
- 904.50 MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

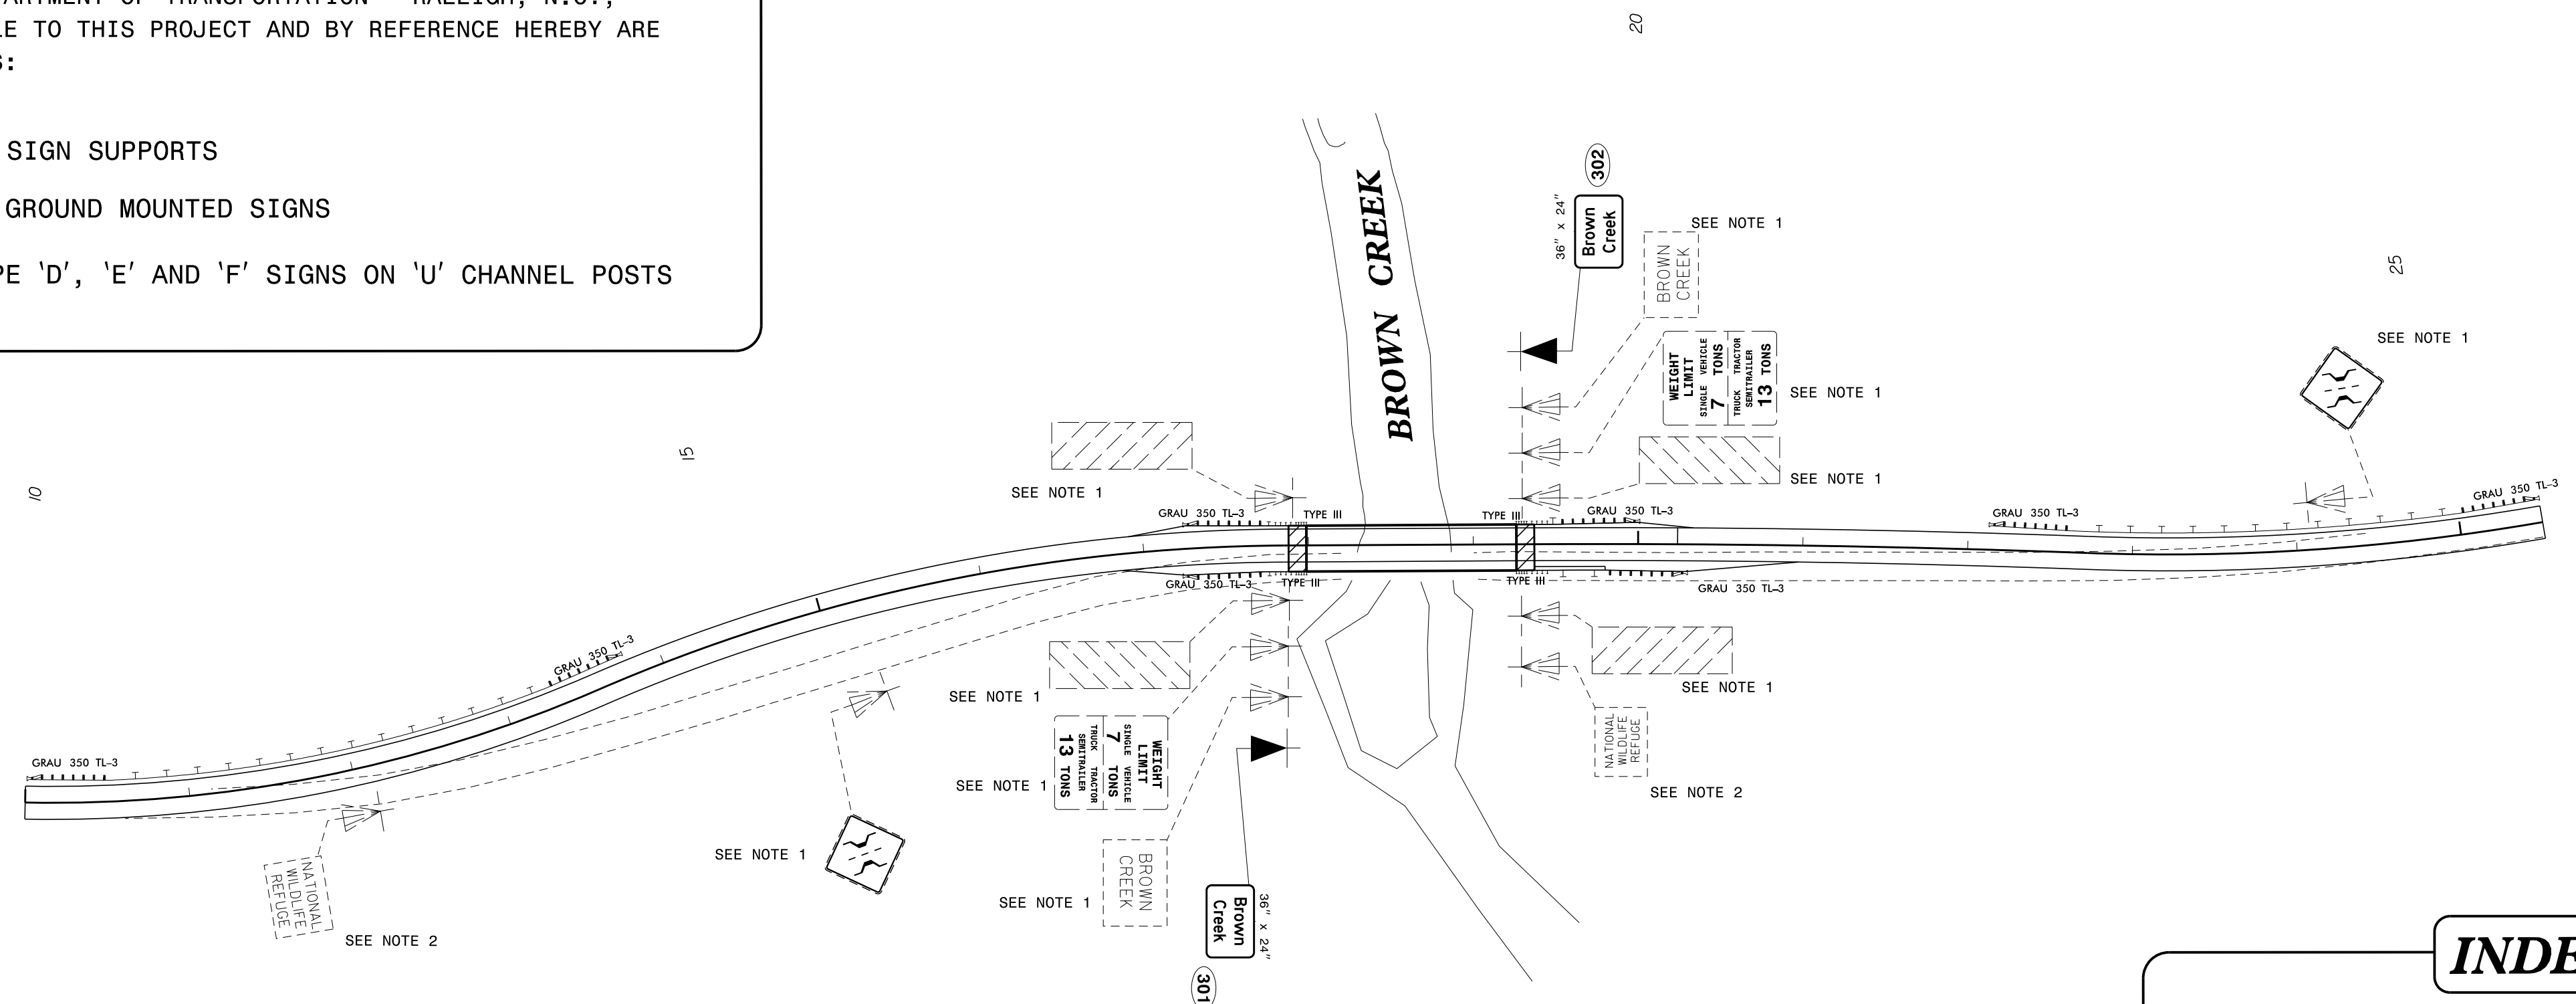

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

KELVIN JORDAN SIGNING & DELINEATION REGIONAL ENGINEER
J. NAVARRETE SIGNING & DELINEATION PROJECT DESIGN ENGINEER

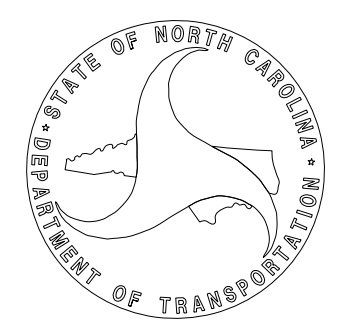

INDEX

| SHEET NO. | DESCRIPTION |
|-----------|-------------|
| SIGN-1 | TITLE SHEET |
| SIGN-2 | SIGN DESIGN |

6/21/2016 P:\TIP\Projects-B\2506\Traffic\Signing\CADD\Signing Layout Plans\B-2506_sgm.dgn User: jnavarrete

