



| | | | |
|-------------------------------------|-------------|-----------|--------------|
| STATE | PROJECT NO. | SHEET NO. | TOTAL SHEETS |
| N.C. | | 19 | |
| WBS NO. 2018CPT.10.11.10601.1, etc. | | | |

JEFF ADAMS DR
REAGAN DR FROM GRAHAM TO SUGAR CREEK

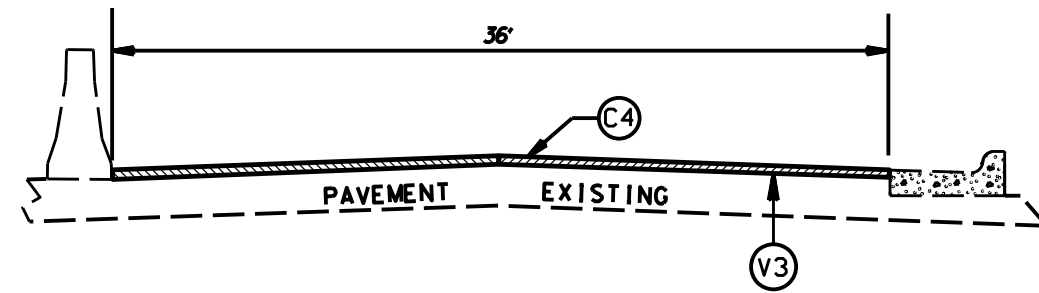


TYPICAL SECTION NO. 22

REAGAN DR
FROM GRAHAM TO SUGAR CREEK

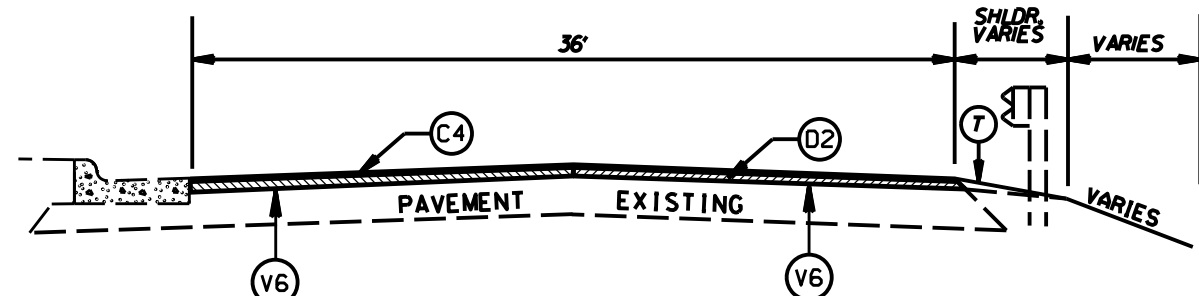

TYPICAL SECTION NO. 23


REAGAN DR
FROM GRAHAM TO SUGAR CREEK

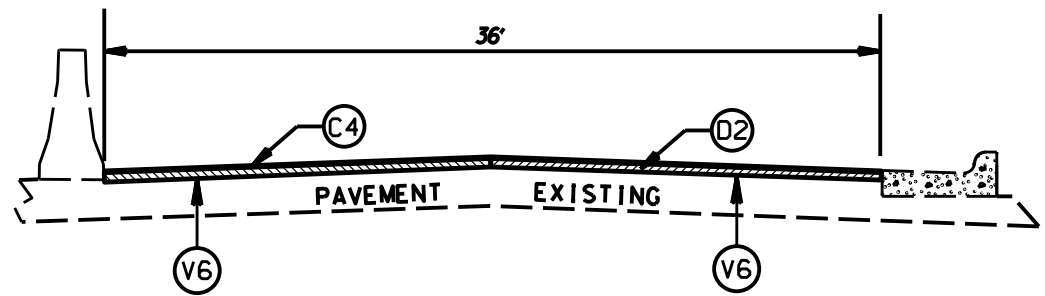

TYPICAL SECTION NO. 24

| PAVEMENT SCHEDULE | |
|-------------------|---|
| C2 | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. |
| C3 | PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TWO LAYER AT AN AVERAGE RATE OF 110 LBS., PER SQ.YD. |
| C4 | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. |
| C5 | PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD. |
| C6 | PROP. ASPHALT SURFACE TREATMENT, MATCOAT #67, AT AN AVERAGE RATE OF 25 LBS. PER SQ. YD. (STONE) AND 0.35 GALLONS PER SQ. YD. (LIQUID ASPHALT) |
| C8 | PROP. ASPHALT SURFACE TREATMENT, DOUBLE SEAL: TOP LAYER #78 STONE AT 12 LBS./SY, AND 0.25 GALS./SY EMULSION BOTTOM LAYER #78 AT 18 LBS/SY, AND 0.30 GALS./SY EMULSION |
| D2 | PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD. |
| F | PROPOSED FULL DEPTH RECLAMATION AT A DEPTH OF 12 INCHES WITH PORTLAND CEMENT TREATED BASE AT AN AVERAGE RATE OF 73 LBS/SY |
| J | ABC STONE 12" DEPTH |
| V1 | INCIDENTAL MILLING |
| V2 | MILLING 1.0" DEPTH |
| V3 | MILLING 1.5" DEPTH |
| V4 | MILLING 2.0" DEPTH |
| V5 | MILLING 2.5" DEPTH |
| V6 | MILLING 4.0" DEPTH |
| T | SHOULDER RECONSTRUCTION |

2018/2019 MECKLENBURG COUNTY
RESURFACING

| | | | |
|-----------|------|---|-----------|
| SCALE | -NA- |  | REVISIONS |
| DATE | 3/18 | | 4/4/18 |
| DWG. BY | JHE | | |
| DESIGN BY | JHE | | |
| APPROVED | | | |