



| | | | |
|-------------------------------------|-------------|-----------|--------------|
| STATE | PROJECT NO. | SHEET NO. | TOTAL SHEETS |
| N.C. | | 24 | |
| WBS NO. 2018CPT.10.11.10601.1, etc. | | | |

| PAVEMENT SCHEDULE | |
|-------------------|---|
| C2 | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. |
| C3 | PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TWO LAYER AT AN AVERAGE RATE OF 110 LBS., PER SQ.YD. |
| C4 | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. |
| C5 | PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD. |
| C6 | PROP. ASPHALT SURFACE TREATMENT, MATCOAT #67, AT AN AVERAGE RATE OF 25 LBS. PER SQ. YD. (STONE) AND 0.35 GALLONS PER SQ. YD. (LIQUID ASPHALT) |
| C8 | PROP. ASPHALT SURFACE TREATMENT, DOUBLE SEAL: TOP LAYER #78 STONE AT 12 LBS./SY, AND 0.25 GALS./SY EMULSION BOTTOM LAYER #78 AT 18 LBS/SY, AND 0.30 GALS./SY EMULSION |
| D2 | PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD. |
| F | PROPOSED FULL DEPTH RECLAMATION AT A DEPTH OF 12 INCHES WITH PORTLAND CEMENT TREATED BASE AT AN AVERAGE RATE OF 73 LBS/SY |
| J | ABC STONE 12" DEPTH |
| V1 | INCIDENTAL MILLING |
| V2 | MILLING 1.0" DEPTH |
| V3 | MILLING 1.5" DEPTH |
| V4 | MILLING 2.0" DEPTH |
| V5 | MILLING 2.5" DEPTH |
| V6 | MILLING 4.0" DEPTH |
| T | SHOULDER RECONSTRUCTION |

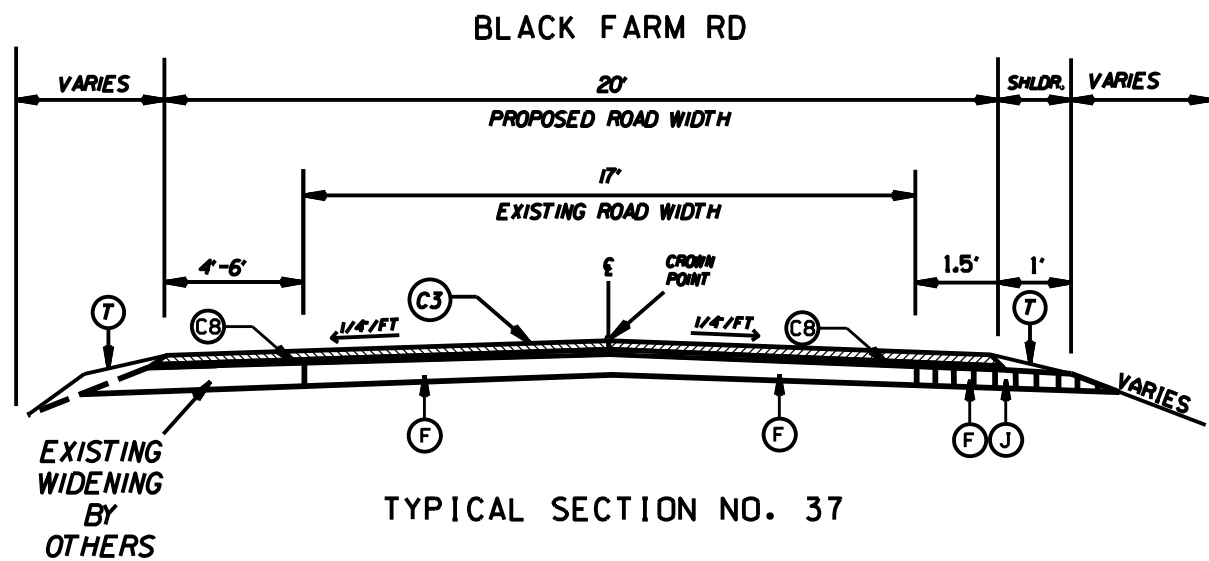


TYPICAL SECTION NO. 37

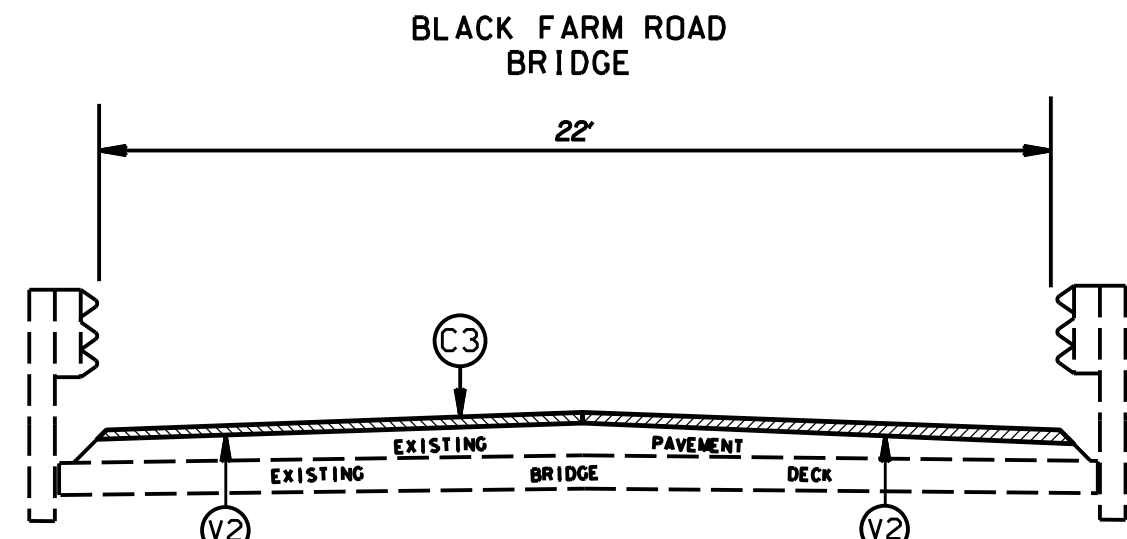


TYPICAL SECTION NO. 38

PAGES POND CT
WHITE BIRCH TRAIL

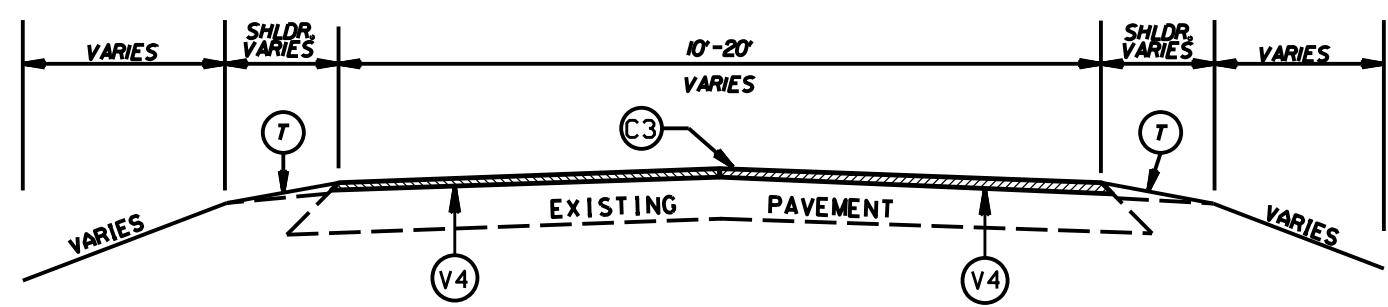

TYPICAL SECTION NO. 39

2018/2019 MECKLENBURG COUNTY RESURFACING

| | | | |
|-----------|------|---|-----------|
| SCALE | -NA- |  | REVISIONS |
| DATE | 3/18 | | 4/4/18 |
| DWG. BY | JHE | | |
| DESIGN BY | JHE | | |
| APPROVED | | | |