

AS-BUILT REPAIR QUANTITY TABLE


TOP OF DECK REPAIRS		
	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	322 SQ. YDS.	
CLASS II SURFACE PREPARATION	5.7 SQ. YDS.	
CONCRETE DECK REPAIR FOR PPC OVERLAY	5.7 SQ. YDS.	
SHOTBLASTING BRIDGE DECK	322 SQ. YDS.	
PPC MATERIALS	11.2 CU. YDS.	
PLACING AND FINISHING PPC OVERLAY	322 SQ. YDS.	
GROOVING BRIDGE FLOORS	2672 SQ. FT.	

TOP OF DECK REPAIR QUANTITIES REPRESENT ESTIMATED VALUES OF CLASS II SURFACE PREPARATION AND CONCRETE DECK REPAIR FOR PPC OVERLAY AFTER REMOVAL OF UNSOUND CONCRETE (MIN. 2" CLEAR TO SAWCUT). SEE OVERLAY SURFACE PREPARATION FOR POLYESTER POLYMER CONCRETE SPECIAL PROVISION.


NOTES:

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

FOR SECTIONS A-A AND B-B, SEE "JOINT DETAILS" SHEET.

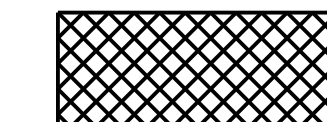

CLASS II SURFACE PREPARATION

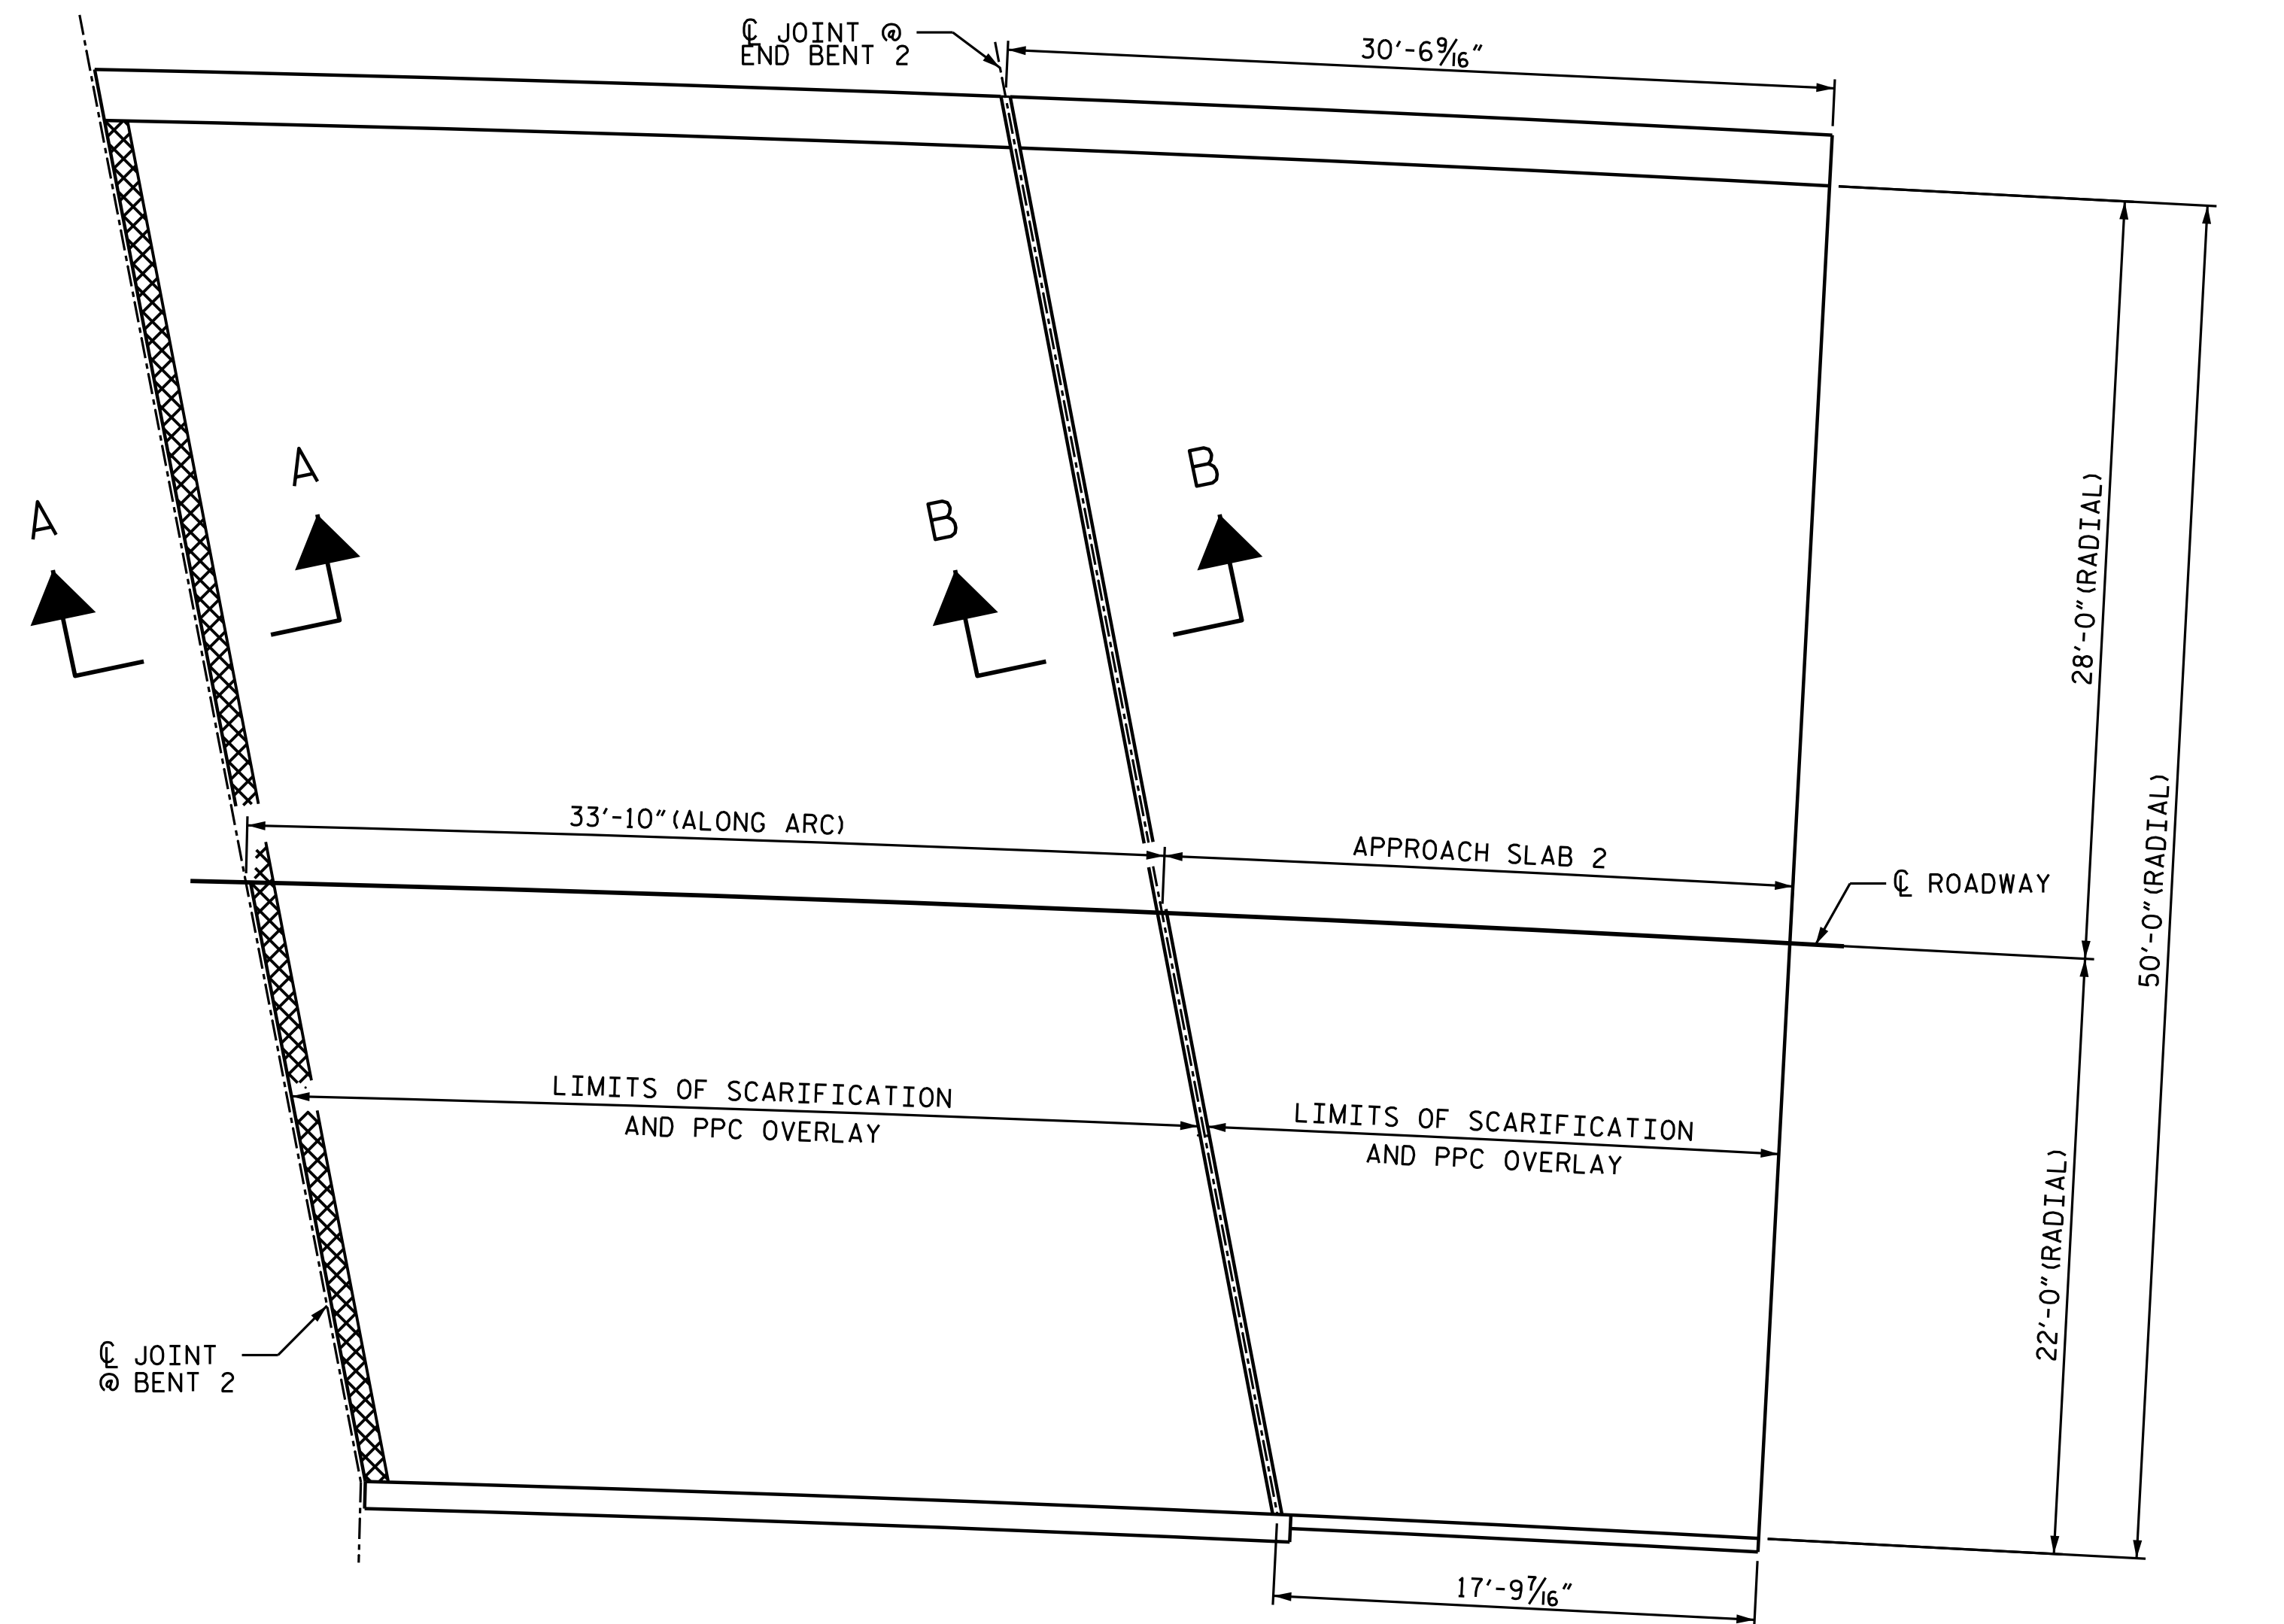

PLAN

← TO U.S. 521

TO U.S. 74 →

PROJECT NO. I-5825
MECKLENBURG COUNTY
 BRIDGE NO. 207

SHEET 3 OF 3

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

PLAN OF SPAN
 SPAN C
 AND APPROACH SLAB 2



DocuSigned by:
 Nicholas Pierce 3/2/2018
 15110843408485...

DRAWN BY : E. K. POPE DATE : 12/17
 CHECKED BY : A. SORSENGINH DATE : 1/18

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-9
1			3			TOTAL SHEETS
2			4			31