

← TO U.S. 521

PLAN

TO U.S. 74 →


AS-BUILT REPAIR QUANTITY TABLE		
TOP OF DECK REPAIRS		
	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	430 SQ. YDS.	
CLASS II SURFACE PREPARATION	7.0 SQ. YDS.	
CONCRETE DECK REPAIR FOR PPC OVERLAY	7.0 SQ. YDS.	
SHOTBLASTING BRIDGE DECK	430 SQ. YDS.	
PPC MATERIALS	14.9 CU. YDS.	
PLACING AND FINISHING PPC OVERLAY	430 SQ. YDS.	
GROOVING BRIDGE FLOORS	3626 SQ. FT.	

TOP OF DECK REPAIR QUANTITIES REPRESENT ESTIMATED VALUES OF CLASS II SURFACE PREPARATION AND CONCRETE DECK REPAIR FOR PPC OVERLAY AFTER REMOVAL OF UNSOUND CONCRETE (MIN. 2" CLEAR TO SAWCUT). SEE OVERLAY SURFACE PREPARATION FOR POLYESTER POLYMER CONCRETE SPECIAL PROVISION.

NOTES:


REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

FOR SECTIONS A-A AND B-B, SEE "JOINT DETAILS" SHEETS.

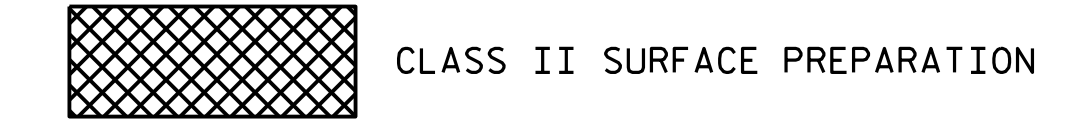

PROJECT NO. I-5825
MECKLENBURG COUNTY
 BRIDGE NO. 213

SHEET 1 OF 3

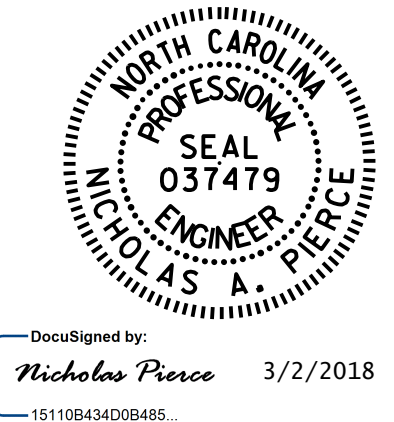

DocuSigned by:
 Nicholas Pierce 3/2/2018
 1511084340208485

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH
 PLAN OF SPAN
 APPROACH SLAB 1
 AND SPAN A

DRAWN BY : E. K. POPE DATE : 12/17
 CHECKED BY : A. SORSENGINH DATE : 1/18

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-13
1			3			TOTAL SHEETS
2			4			31