


AS-BUILT REPAIR QUANTITY TABLE		
TOP OF DECK REPAIRS		
	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	588 SQ. YDS.	
CLASS II SURFACE PREPARATION	14.0 SQ. YDS.	
CONCRETE DECK REPAIR FOR PPC OVERLAY	14.0 SQ. YDS.	
SHOTBLASTING BRIDGE DECK	588 SQ. YDS.	
PPC MATERIALS	20.4 CU. YDS.	
PLACING AND FINISHING PPC OVERLAY	588 SQ. YDS.	
GROOVING BRIDGE FLOORS	5014 SQ. FT.	

TOP OF DECK REPAIR QUANTITIES REPRESENT ESTIMATED VALUES OF CLASS II SURFACE PREPARATION AND CONCRETE DECK REPAIR FOR PPC OVERLAY AFTER REMOVAL OF UNSOUND CONCRETE (MIN. 2" CLEAR TO SAWCUT). SEE OVERLAY SURFACE PREPARATION FOR POLYESTER POLYMER CONCRETE SPECIAL PROVISION.


NOTES:

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

FOR SECTION A-A, SEE "JOINT DETAILS" SHEETS.

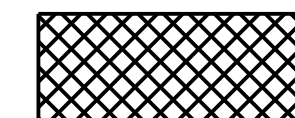

CLASS II SURFACE PREPARATION

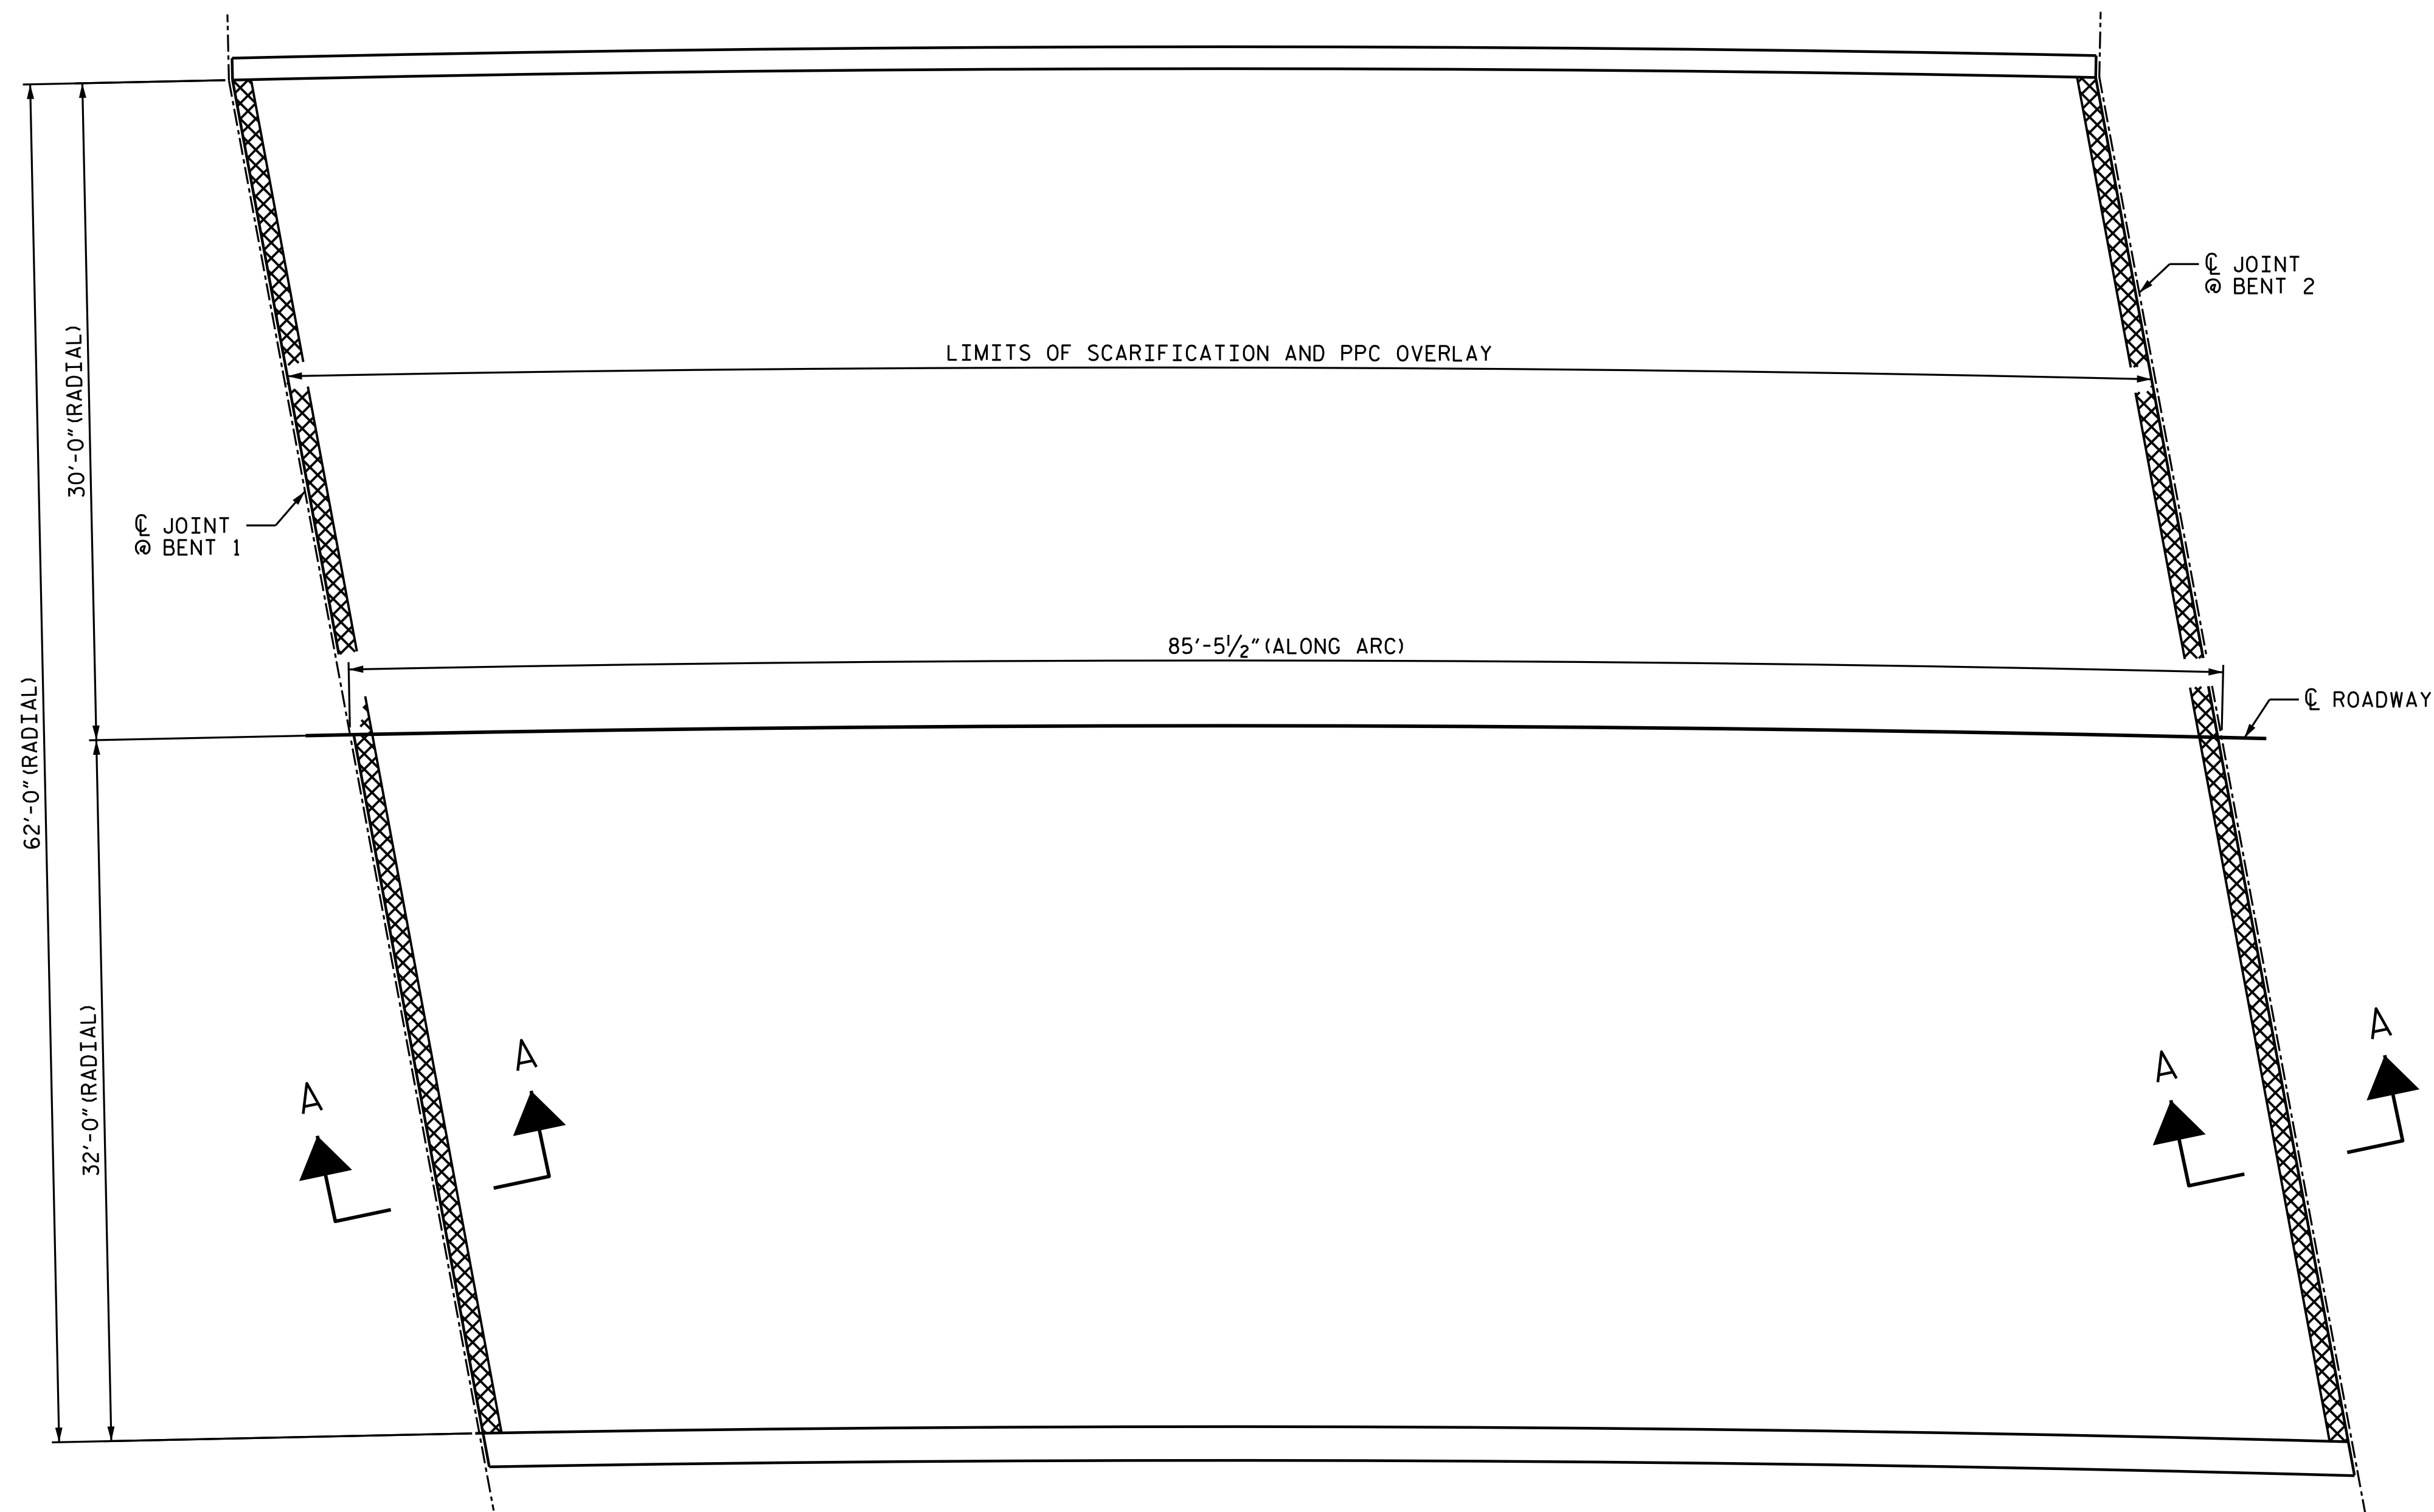

← TO U.S. 521

PLAN

TO U.S. 74 →

PROJECT NO. I-5825
MECKLENBURG COUNTY
BRIDGE NO. 213

SHEET 2 OF 3



Drawn/Sealed by:
Nicholas Pierce 3/2/2018
151108434008485

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

PLAN OF SPAN
SPAN B

DRAWN BY : E. K. POPE DATE : 12/17
CHECKED BY : A. SORSENGINH DATE : 1/18

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-14
1			3			TOTAL SHEETS
2			4			31