

PLAN

AS-BUILT REPAIR QUANTITY TABLE		
TOP OF DECK REPAIRS		
	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	313 SQ. YDS.	
CLASS II SURFACE PREPARATION	* 0.5 SQ. YDS.	
CONCRETE DECK REPAIR FOR PPC OVERLAY	* 0.5 SQ. YDS.	
SHOTBLASTING BRIDGE DECK	313 SQ. YDS.	
PPC MATERIALS	10.9 CU. YDS.	
PLACING AND FINISHING PPC OVERLAY	313 SQ. YDS.	
GROOVING BRIDGE FLOORS	2418 SQ. FT.	

TOP OF DECK REPAIR QUANTITIES REPRESENT ESTIMATED VALUES OF CLASS II SURFACE PREPARATION AND CONCRETE DECK REPAIR FOR PPC OVERLAY AFTER REMOVAL OF UNSOUND CONCRETE (MIN. 2" CLEAR TO SAWCUT), SEE OVERLAY SURFACE PREPARATION FOR POLYESTER POLYMER CONCRETE SPECIAL PROVISION.

NOTES:


REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

FOR SECTIONS A-A AND B-B, SEE "JOINT DETAILS" SHEET.

* CLASS II SURFACE PREPARATION AND CONCRETE REPAIR FOR PPC OVERLAY ARE NOT ANTICIPATED. A TOKEN PAY ITEM IS INDICATED FOR PRICING PURPOSES IN THE EVENT UNANTICIPATED CLASS II AREAS ARE ENCOUNTERED.

PROJECT NO. I-5825
MECKLENBURG COUNTY
 BRIDGE NO. 215

SHEET 1 OF 4

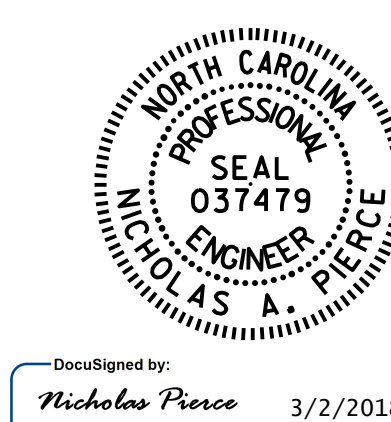

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH
 PLAN OF SPAN
 APPROACH ROADWAY 1
 AND SPAN A

DRAWN BY : E. K. POPE DATE : 1/18
 CHECKED BY : N. A. PIERCE DATE : 1/18

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-19
1			3			TOTAL SHEETS
2			4			31