

**This electronic collection of documents is provided
for the convenience of the user
and is Not a Certified Document –**


**The documents contained herein were originally issued
and sealed by the individuals whose names and license
numbers appear on each page, on the dates appearing
with their signature on that page.**

**This file or an individual page
shall not be considered a certified document.**

**STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION**

**SIGNING PLAN
WAKE COUNTY**

LOCATION: BRIDGE NO. 362 OVER BEAVER CREEK ON SR 1162 (APEX BARBECUE RD)

PROJECT REFERENCE NO. B-5161	SHEET NO. SIGN-1
APPROVED: <i>Ayman Alqudwah</i> F32AC5CAF68472	
DATE: 2/22/2018	
SEAL 	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

T.I.P.: B-5161

CONTRACT: C204098

SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	75	L.F.
4102000000	904	SIGN ERECTION, TYPE E	10	EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	13	EA.

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS


GENERAL NOTES

- . SIGNS FURNISHED BY STATE
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.








PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

AYMAN ALQUDWAH, P.E. SIGNING & DELINEATION REGIONAL ENGINEER

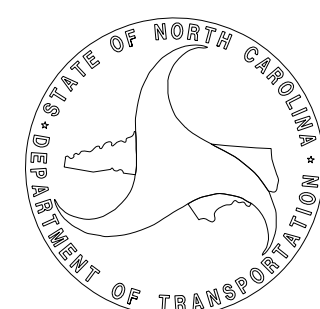STACEY W. JOHNS SIGNING & DELINEATION PROJECT DESIGN ENGINEER


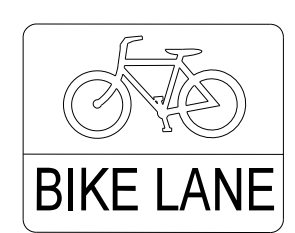


"E" SIGNS

<p>401 QUANTITY REQ'D <u>2</u></p>  <p>ONE "U" POST PER SIGN</p>	<p>404 QUANTITY REQ'D <u>1</u></p>  <p>ONE "U" POST PER SIGN</p>	<p>407 QUANTITY REQ'D <u>1</u></p>  <p>MOUNT BELOW SIGN 406 IN 1 INSTALLATION</p>
<p>402 QUANTITY REQ'D <u>2</u></p>  <p>ONE "U" POST PER SIGN</p>	<p>405 QUANTITY REQ'D <u>1</u></p>  <p>MOUNT BELOW SIGN 401 IN 1 INSTALLATION</p>	
<p>403 QUANTITY REQ'D <u>2</u></p>  <p>ONE "U" POST PER SIGN</p>	<p>406 QUANTITY REQ'D <u>1</u></p>  <p>ONE "U" POST PER SIGN</p>	

INDEX

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET, E-SIGN, & NOTES
SIGN-2	SIGN DETAIL SHEET

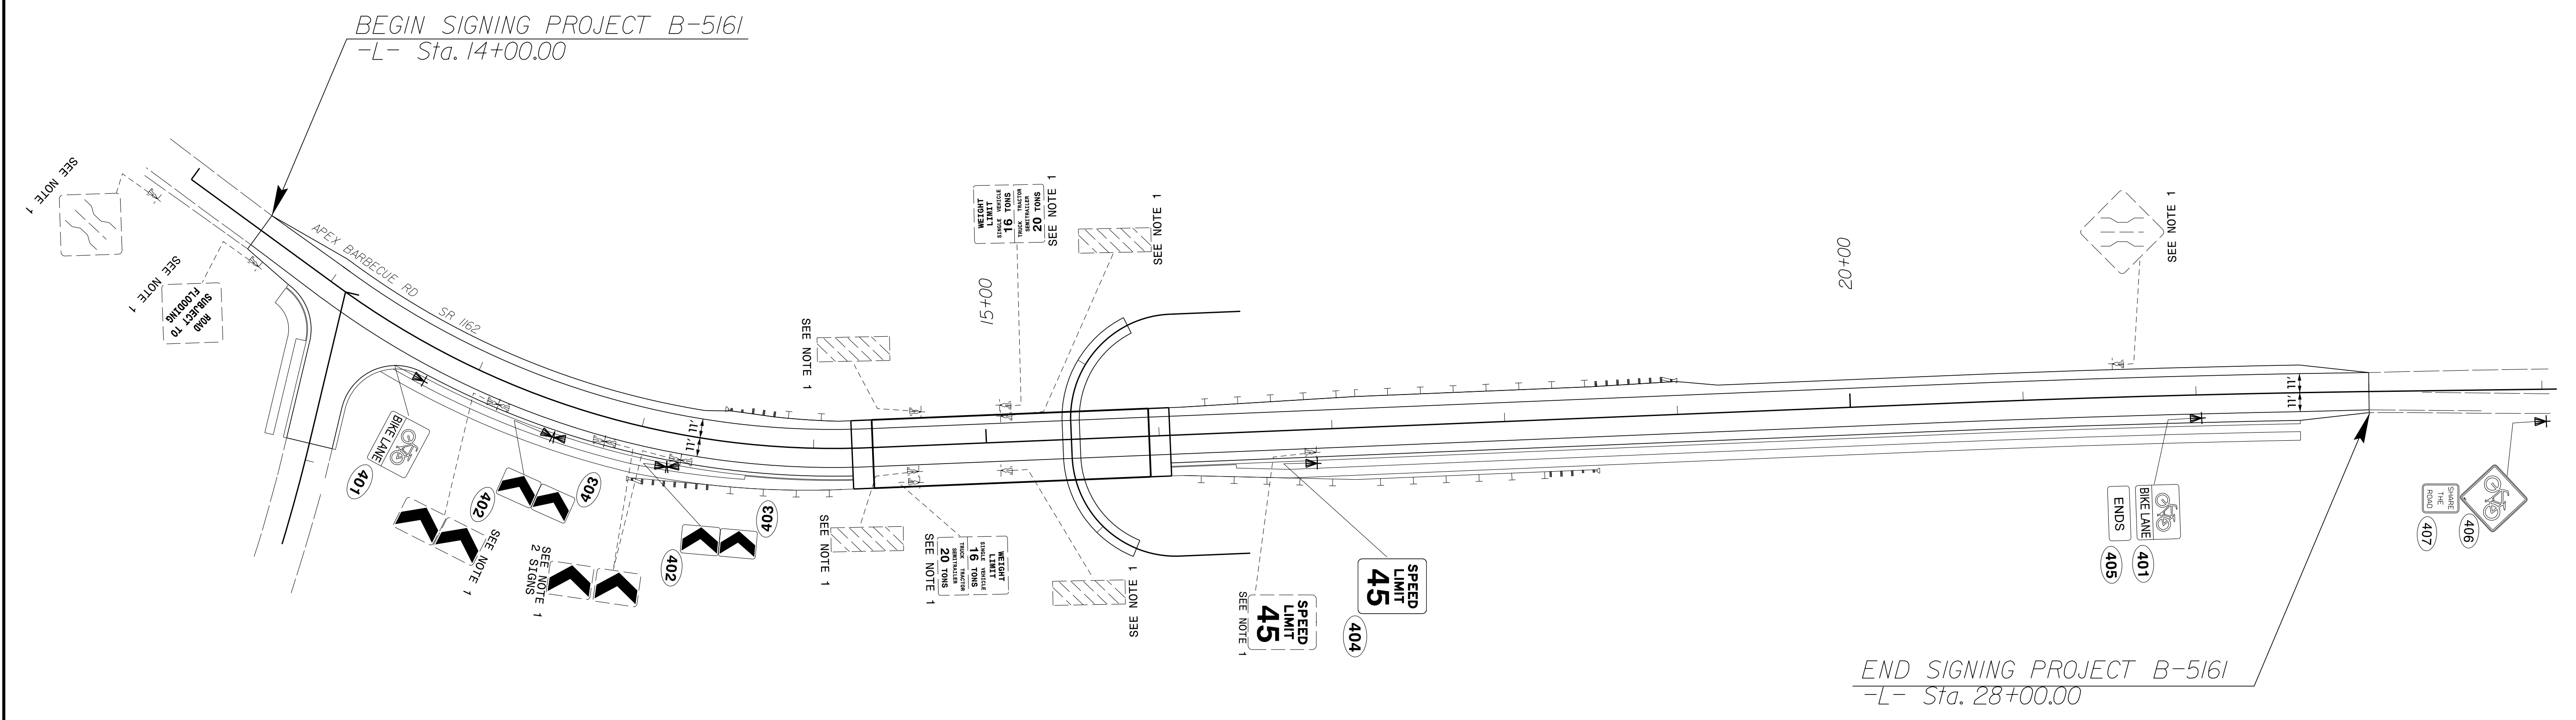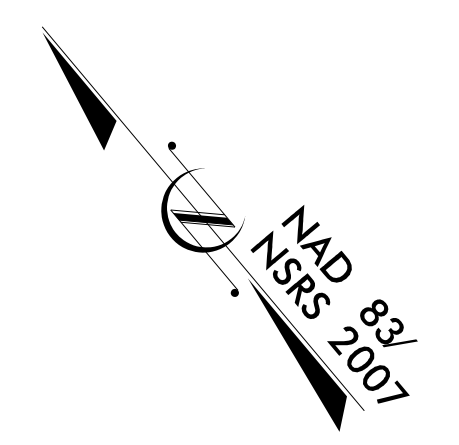

PAY ITEM NOTES

1	DISPOSAL OF SIGN SYSTEM, U-CHANNEL
---	------------------------------------

SIGN DETAIL SHEET

02/22/18
 P:\Projects\B5161\Traffic\Signing\CADD\Signing_Layout_Plans\B5161_Sgn_1_2.dgn
 Jserfs:tdns