US 401 (Raeford Road) from West Hampton Oaks Drive to East of Fairway Drive in Fayetteville

Parcel 332 – Waterville Equities I LLC Property 2605 Raeford Road, Fayetteville, North Carolina

State Project No. U-4405

WBS Element: 39049.1.1

December 16, 2016

Terracon Project No. 70167490



Prepared for:

North Carolina Department of Transportation Raleigh, North Carolina

Prepared by:

Terracon Consultants, Inc. Raleigh, North Carolina

terracon.com



Environmental Facilities Geotechnical Materials

TABLE OF CONTENTS

Page No.

1.0	INTRODUCTION	1
1.1	Site Description	1
1.2	Site History	1
1.3	Scope of Work	1
1.4	Standard of Care	2
1.5	Additional Scope Limitations	2
1.6	Reliance	2
2.0	FIELD ACTIVITIES	3
2.1	Geophysical Survey	3
2.2	Soil Sampling	3
3.0	LABORATORY ANALYSES	4
4.0	DATA EVALUATION	4
4.1	Soil Analytical Results	4
5.0	CONCLUSIONS AND RECOMMENDATIONS	5
6.0	REFERENCES	6

TABLES

Table 1 – Summary of Soil Analytical Results

EXHIBITS

Exhibit 1 – Topographic Vicinity Map

Exhibit 2 – Site Diagram with Soil Boring Locations and Analytical Data

APPENDICES

Appendix A: Geophysical Survey Report

Appendix B: Soil Boring Logs

Appendix C: Laboratory Analytical Reports and Chain-of-Custody Forms



North Carolina Department of Transportation Attention: Mr. Terry W. Fox, LG, GeoEnvironmental Engineering Unit Century Center Complex Building B 1020 Birch Ridge Road Raleigh, North Carolina 27610

Re: Preliminary Site Assessment (PSA)

US 401 (Raeford Road) from West Hampton Oaks Drive to East of Fairway Drive in

Fayetteville

Parcel 332 – Waterville Equities I LLC Property 2605 Raeford Road, Fayetteville, North Carolina

State Project No. U-4405 WBS Element: 39049.1.1

Dear Mr. Fox:

Terracon Consultants, Inc. (Terracon) is pleased to submit a Preliminary Site Assessment (PSA) report for the above referenced site. This assessment was performed in accordance with our Proposal for Preliminary Site Assessment (Terracon Proposal No. P70167490) dated September 27, 2016. This report includes the findings of the investigation, and provides our conclusions and recommendations.

Terracon appreciates the opportunity to provide these services to the North Carolina Department of Transportation. If you have any questions concerning this report or need additional information, please contact us at 919-873-2211.

Sincerely,

Terracon Consultants, Inc.

Prepared by: Reviewed by:

Ethan H. Smith

Field Geologist Environmental Department Manager

Michael T. Jordan, P.G.

Terracon Consultants, Inc. 2401 Brentwood Road, Suite 107 Raleigh, NC 27604
P [919] 873 2211 F [919] 873 9555 terracon.com

Environmental 🛑 Facilities 🛑 Geotechnical 🛑 Materials

PRELIMINARY SITE ASSESSMENT

US 401 (RAEFORD ROAD) FROM WEST HAMPTON OAKS DRIVE TO EAST OF FAIRWAY DRIVE IN FAYETTEVILLE, CUMBERLAND COUNTY, NORTH CAROLINA STATE PROJECT NO. U-4405

WBS ELEMENT: 39049.1.1

PARCEL 332 – WATERVILLE EQUITIES I LLC PROPERTY 2605 RAEFORD ROAD, FAYETTEVILLE, NORTH CAROLINA

1.0 INTRODUCTION

1.1 Site Description

Site Name	US 401 (Raeford Road) from West Hampton Oaks Drive to East of Fairway Drive in Fayetteville
Site Location/Address	2605 Raeford Road, Fayetteville, NC 28303 (Cumberland County Tax PIN: 0427-41-0485)
General Site Description	The site consists of a one-story commercial building that is currently operated as a Rite Aid pharmacy. The site is further improved with a paved access drive and parking areas.

1.2 Site History

The site is located at 2605 Raeford Road in Fayetteville, Cumberland County, North Carolina. At the time of the Preliminary Site Assessment (PSA), the site was operating as a Rite Aid pharmacy. This site was a former Holt Amoco gas station (NCDOT, 2016). According to the North Carolina Department of Environmental Quality (NCDEQ) – Division of Waste Management Underground Storage Tank (UST) Section Registered Tank Database, the site formerly operated two 2,000-gallon gasoline USTs that were reportedly installed in March 1961 and one 1,000-gallon gasoline UST that was reportedly installed in March 1980. The USTs were reportedly removed in June 1985. The facility was assigned Groundwater Incident #29049 on April 14, 2003 and was closed on May 6, 2003 (NCDOT, 2016). Additional details for the USTs and the Groundwater Incident were not provided. However, during the assessment activities, five (5) groundwater monitoring wells were observed on the property. It appears that at least one monitoring well is located within the NCDOT right-of-way (ROW).

1.3 Scope of Work

Terracon conducted the following PSA scope of work (SOW) in accordance with Terracon's proposal for PSA (Proposal No. P70167490) dated September 27, 2016. This PSA is being

Parcel 332 – Waterville Equities I LLC Property Fayetteville, North Carolina December 16, 2016 Terracon Project No. 70167490



completed prior to planned median improvements and lane widening along US 401 (Raeford Road) in Fayetteville, North Carolina (site). The scope of work included a geophysical investigation, collection of four soil samples, and preparation of a report documenting our investigation activities. The PSA is not intended to delineate potential impacts. The PSA was performed within the proposed ROW as indicated by NCDOT provided plan sheets.

1.4 Standard of Care

Terracon's services were performed in a manner consistent with generally accepted practices of the profession undertaken in similar studies in the same geographical area during the same time period. Terracon makes no warranties, either expressed or implied, regarding the findings, conclusions or recommendations. Please note that Terracon does not warrant the work of laboratories, regulatory agencies or other third parties supplying information used in the preparation of the report. These services were performed in accordance with our proposal for PSA (Terracon Proposal No. P70167490) dated September 27, 2016 and were not conducted in accordance with ASTM E1903-11.

1.5 Additional Scope Limitations

Findings, conclusions and recommendations resulting from these services are based upon information derived from the on-site activities and other services performed under this scope of work; such information is subject to change over time. Certain indicators of the presence of hazardous substances, petroleum products, or other constituents may have been latent, inaccessible, unobservable, undetectable or not present during these services; thus, we cannot represent that the site is free of hazardous substances, toxic materials, petroleum products, or other latent conditions beyond those identified during this PSA. Subsurface conditions may vary from those encountered at specific borings or wells or during other surveys, tests, assessments, investigations or exploratory services; the data, interpretations, findings, and our recommendations are based solely upon data obtained at the time and within the scope of these services.

1.6 Reliance

This report has been prepared for the exclusive use of the NCDOT. Authorization for use or reliance by any other party (except a governmental entity having jurisdiction over the site) is prohibited without the expressed written authorization of the client and Terracon.

Parcel 332 – Waterville Equities I LLC Property ■ Fayetteville, North Carolina December 16, 2016 ■ Terracon Project No. 70167490



2.0 FIELD ACTIVITIES

The following PSA activities are presented in the order that they were conducted in the field.

Exhibit 1 presents the topography of the site on a portion of the USGS topographic quadrangle map of Fayetteville, NC 1997. **Exhibit 2** is a site layout plan that indicates the approximate locations of the site features, soil boring locations, and analytical results.

2.1 Geophysical Survey

On October 19, October 26, and November 7, 2016, Geophysical Survey Investigations, PLLC conducted a geophysical investigation at the site in an effort to determine if unknown, metallic USTs were present beneath the proposed ROW area. The geophysical investigation included an electromagnetic (EM) induction survey using a Geonics EM61-MK2A metal detection instrument and a ground penetrating radar (GPR) survey using a Geophysical Survey Systems SIR-3000 unit.

The geophysical investigation did not reveal possible or probable metallic USTs. However, anomalies were detected that are probably in response to buried lines or conduits. In addition to metal detection and GPR scans, NC One Call public utility locator identified several underground utility lines. A copy of the geophysical report is included in **Appendix A**.

2.2 Soil Sampling

Based on the findings of the geophysical investigation and Terracon's site observations, Terracon provided oversight for the advancement of four soil borings (SB-24 through SB-27) along the north and northeastern portion of Parcel 332 and within the NCDOT ROW. The borings were completed by a North Carolina Certified Well Contractor (Regional Probing Services) using a truck-mount Geoprobe® 5410 direct-push drill rig.

Soil samples were collected in 4-foot, disposable, Macro-Core® sampler tubes to document soil lithology, color, moisture content, and sensory evidence of impacts. Each soil sample was screened for organic vapors using an 11.7 eV photoionization detector (PID). The PID data were collected in order to corroborate laboratory data and assist in selection of sample intervals for laboratory analysis. PID readings from the borings ranged from less than 0.1 to 2.5 parts per million (ppm).

Based on the proposed disturbance depths and discussion with the NCDOT, each of the soil borings was advanced to a depth of approximately 15 feet below land surface (bls). Four soil samples, one from each boring, were collected from depths ranging between 7 to 15 feet bls and placed in laboratory provided sample containers and shipped to REDLAB/QROS, LLC –

Parcel 332 – Waterville Equities I LLC Property Fayetteville, North Carolina December 16, 2016 Terracon Project No. 70167490



Environmental Testing for analysis by UVF. Soil samples were collected in the depth interval that was most likely to be impacted.

The drilling equipment used at the site was decontaminated prior to use and between the advancement of each boring. Non-dedicated sampling equipment was decontaminated using a Liquinox®/water wash followed by a distilled water rinse. Each of the boreholes was backfilled with hydrated bentonite pellets and investigation derived waste (IDW) was containerized in a 55-gallon DOT approved drum. The drum was staged beside the dumpster north of the Dunkin Donuts located at 2628 Raeford Road, Fayetteville, NC 28303 (Dunkin Donuts contact - Matt Ellsworth [910-920-1992] for subsequent disposal by the NCDOT).

Soil generally consisted of clay and sand. Groundwater was not encountered in the four borings. The soil boring logs are included in **Appendix B**. Sample locations were measured relative to site features and the locations depicted on **Exhibit 2** are approximate.

3.0 LABORATORY ANALYSES

Soil samples were submitted to QROS for analysis of the following:

- TPH-gasoline range organics (C₅-C₁₀) (GRO);
- TPH-diesel range organics (C₁₀-C₃₅) (DRO);
- Total petroleum hydrocarbons (C₅-C₃₅) (TPH);
- Benzene, toluene, ethylbenzene, and xylenes (BTEX);
- Total aromatics $(C_{10}-C_{35})$;
- 16 EPA Polycyclic Aromatic Hydrocarbons (16 EPA PAHs); and
- Benzo(a)pyrene (BaP).

Please refer to **Appendix C** for the laboratory analytical reports.

4.0 DATA EVALUATION

4.1 Soil Analytical Results

Laboratory analysis reported the following detections above the laboratory reporting limits in soil borings SB-24 through SB-27:

- TPH-GRO (C₅-C₁₀) was not detected above laboratory reporting limits;
- TPH-DRO (C₁₀-C₃₅) was reported between 0.78 and 2.6 milligrams per kilogram (mg/kg);
- TPH (C₅-C₃₅) was reported between 0.78 and 2.6 mg/kg;
- BTEX was not detected above laboratory reporting limits;
- Total aromatics (C₁₀-C₃₅) was reported between 1.8 and 2.1 mg/kg;

Parcel 332 – Waterville Equities I LLC Property Fayetteville, North Carolina December 16, 2016 Terracon Project No. 70167490



- 16 EPA PAHs was reported between 0.10 and 0.25 mg/kg; and
- BaP was reported from less than 0.002 to 0.004 mg/kg.

Laboratory analysis revealed that concentrations were not detected above the NCDEQ Action Levels for TPH in soil borings SB-24 through SB-27

Table 1 summarizes the results of the analyses of the soil samples. **Exhibit 2** depicts the boring locations and detected compounds.

5.0 CONCLUSIONS AND RECOMMENDATIONS

The findings of this investigation are discussed below.

- The geophysical investigation did not reveal possible or probable metallic USTs. However, anomalies were detected that are probably in response to buried lines or conduits.
- Laboratory analysis reported that concentrations were not detected above the NCDEQ Action Levels for TPH in soil borings SB-24 through SB-27.
- Terracon recommends NCDOT provide a copy of the results to the owner and/or operator of the site.
- If monitoring wells may be disturbed during construction; Terracon recommends that they be properly abandoned.
- Terracon does not recommend further assessment of the ROW at this site. However, based on detections of petroleum compounds, construction workers should be alert for potential soil and/or groundwater impacts in other locations at the site.

Parcel 332 – Waterville Equities I LLC Property • Fayetteville, North Carolina December 16, 2016 • Terracon Project No. 70167490



6.0 REFERENCES

NCDOT, 2016. Revised GeoEnvironmental Report for Preliminary Site Assessments. "Hazardous Material Report." August 30, 2016.




Table 1

Summary of Soil Analytical Results Preliminary Site Assessment

Parcel 332 - Waterville Equities I LLC Property

Fayetteville, Cumberland County, North Carolina Terracon Project No. 70167490

Sample ID: Sample Depth (ft bls):	SB-24 7-9	SB-25 11-13	SB-26 13-15	SB-27 9-11	NCDEQ Action Level	MSCC Industrial/ Commercial
GRO (C ₅ -C ₁₀)	<1.0	<1.1	<0.41	<1.0	100	NE
DRO (C ₁₀ -C ₃₅)	<1.0	2.4	0.78	2.6	100	NE
TPH (C ₅ -C ₃₅)	<1.0	2.4	0.78	2.6	NE	NE
BTEX	<1.0	<1.1	< 0.41	<1.0	NE	NE
Total Aromatics (C ₁₀ -C ₃₅)	<0.21	1.8	<0.08	2.1	NE	NE
16 EPA PAHs	< 0.03	0.10	< 0.01	0.25	NE	NE
Benzo(a)pyrene	<0.004	<0.004	<0.002	0.004	NE	0.78

Notes:

Soil samples were collected on November 9, 2016.

Detected compounds are shown in the table.

Concentrations are reported in milligrams per kilogram (mg/kg).

ft bls - feet below land surface.

GRO - Gasoline Range Organics.

DRO - Diesel Range Organics.

TPH - Total Petroleuem Hydrocarbons.

BTEX - Benzene, Toluene, Ethylbenzene, and Xylenes.

16 EPA PAHs - Environmental Protection Agency Polycyclic Aromatic Hydrocarbons (acenaphthene, acenaphthylene, antrancene, benz[a]anthrancene, benzo[b]fluoranthene, benzo[k]fluoranthene, benzo[a]pyrene,


chrysene, dibenz[a,h]anthracene, fluoranthene, fluorene, indeno[1,2,3-c,d]pyrene, naphthalene, phenanthrene, pyrene).


NE - Standard not established.

Detections shaded in gray exceed the North Carolina Department of Environmental Quality (NCDEQ) Action Level.

MSCC Industrial/Commercial - Maximum Soil Contaminant Concentration Levels Industrial/Commercial soil cleanup levels.

Bold: Constituent concentration reported above the method detection limit.



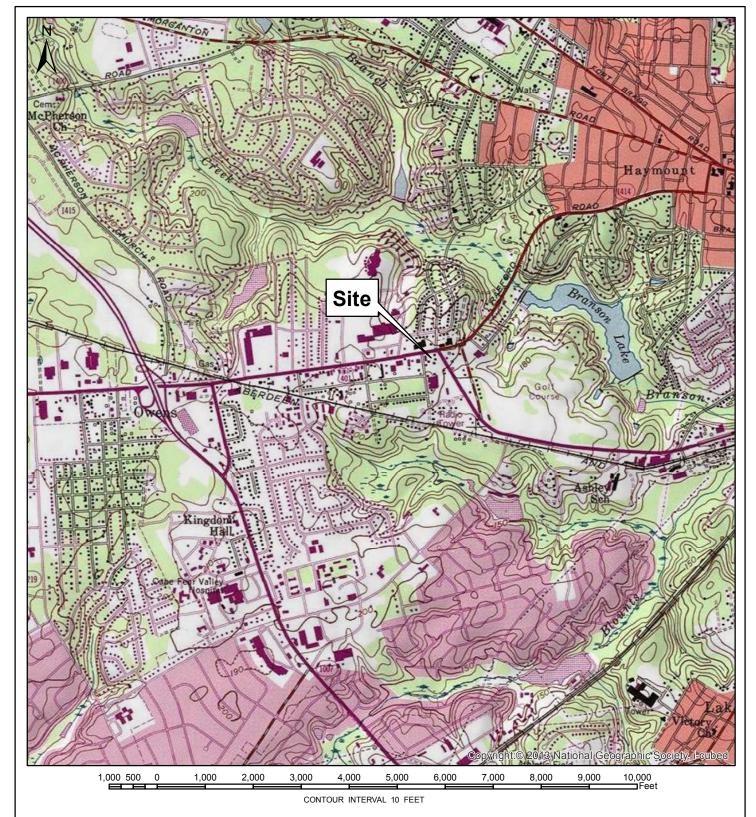

USGS TOPOGRAPHIC MAP FAYETTEVILLE, NC QUADRANGLE 1997

Project Number: 70167490 Scale: 1:24,000 Drawn By: EHS

Checked By: MTJ

Date Drawn: 11/21/16



Phone: (919) 873-2211 Fax: (919) 873-9555


Topographic Vicinity Map

U-4405 Parcel 332 - Waterville Equities I LLC Property 2605 Raeford Road Fayetteville, Cumberland County, NC

EXHIBIT

NO.

1

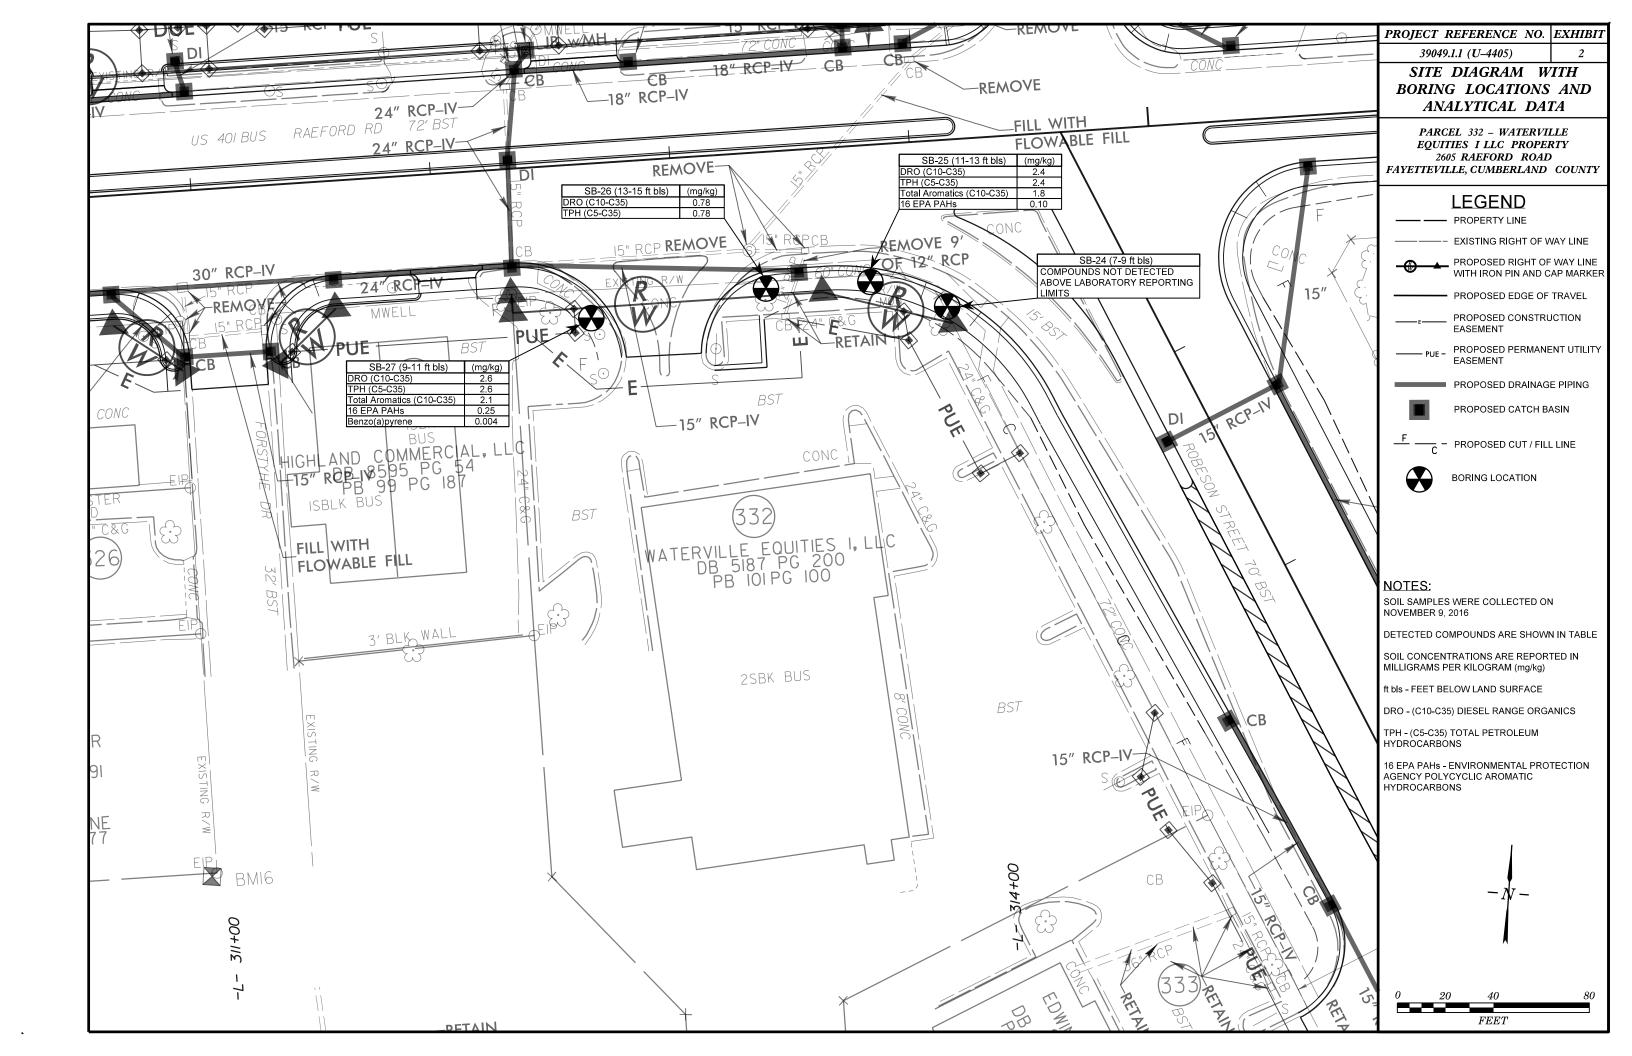

APPENDIX A GEOPHYSICAL SURVEY REPORT

Terracon Consultants, Inc.

GEOPHYSICAL INVESTIGATION TO LOCATE METALLIC USTS

Waterville Equities I LLC Property (Parcel 332) 2605 Raeford Road Fayetteville, North Carolina



November 11, 2016 Geophysical Survey Investigations, PLLC Project No. 2016-37



4 Willimantic Drive, Greensboro, NC 27455 Office Tel: (336) 286-9718 denilm@bellsouth.net

Terracon Consultants, Inc. GEOPHYSICAL INVESTIGATION TO LOCATE METALLIC USTS Waterville Equities I LLC Property (Parcel 332) 2605 Raeford Road Fayetteville, North Carolina

TABLE OF CONTENTS

		<u>Page</u>
1.0	INTRODUCTION	
2.0	FIELD METHODOLOG	GY 1
3.0	DISCUSSION OF RESU	JLTS
4.0	SUMMARY & CONCL	USIONS
5.0	LIMITATIONS	4
		<u>FIGURES</u>
Figu Figu Figu	re 2 EM61-MK	al Equipment & Site Photographs 2A Metal Detection – Early Time Gate Results 2A Metal Detection – Differential Results
	Report prepared for:	Stephen J. Kerlin, PG Terracon Consultants, Inc. 2401 Brentwood Road, Suite 107 Raleigh, North Carolina 27604
	Prepared by:	Mark J. Denil, P.G. Geophysical Survey Investigations, PLLC

1.0 INTRODUCTION

Geophysical Survey Investigations, PLLC (GSI) conducted an electromagnetic (EM) metal detection survey, ground penetrating radar (GPR) scanning and utility line clearance search for Terracon Consultants, Inc. on October 19, October 26 and November 7, 2016 across a portion of the Waterville Equities I LLC property (Parcel 332) located at 2605 Raeford Road in Fayetteville, North Carolina. The geophysical investigation was performed as part of the North Carolina Department of Transportation (NCDOT) preliminary site assessment for State Project U-4405 (WBS Element 39049.1.1) US 401 (Raeford Road) from West of SR-1409 to US 401 Business (Robeson Street).

The geophysical investigation was conducted to determine if buried, metallic, underground, storage tanks (USTs) are present beneath the proposed Right-of-Way (ROW) and PUE areas of the site. The perimeter of the ROW/PUE area is shown as a red polygon in the aerial photograph presented in **Figure 1**. Presently, a Rite Aid Pharmacy store operates on this property.

Terracon representative Mr. Stephen Kerlin, PG provided guidance and site maps to Geophysical Survey Investigations, PLLC personnel prior to conducting the geophysical field work. The geophysical survey area at Parcel 332 has a maximum length and width of 215 feet and 70 feet, respectively. Please note that the ROW and PUE areas at this site were not marked or the survey markers were not visible at the time the geophysical investigation was conducted.

2.0 FIELD METHODOLOGY

The EM investigation was performed across the geophysical survey area (proposed ROW and PUE areas) using a Geonics EM61-MK2A metal detection instrument with a Trimble AG-114 GPS unit. EM61 metal detection data and GPS coordinates were digitally collected in latitude and longitude geodetic format (NAD83) using a Juniper data recorder at approximately 1.0 foot intervals along survey lines spaced approximately five feet apart. The Trackmaker NAV61MK2 software program was used with the data recorder to view the relative positions of the survey lines in real time during data acquisition.

According to the instrument specifications, the EM61-MK2A can detect a metal drum down to a maximum depth of approximately 8 to 10 feet. Objects less than one foot in size can be detected to a maximum depth of 4 or 5 feet. The EM61 and GPS data were downloaded to a computer and processed in the field using the Trackmaker61MK2 and Surfer for Windows software programs. GPS coordinates were converted during data processing to Universal Transverse Mercator (UTM) coordinates (in feet) which are used as location control in this report.

GPR scans were performed along northerly-southerly and easterly-westerly directions spaced primarily 3 to 5 feet apart across selected EM61differential anomalies and areas containing steel reinforced concrete using the Geophysical Survey Systems SIR-3000 unit equipped with a 400 MHz antenna. GPR data were viewed in real time in a continuous mode using a vertical scan of 512 samples, at a sampling rate of 48 scans per second. A 70 MHz high pass filter and an 800 MHz low pass filter were used during data acquisition with the 400 MHz antenna. GPR data were viewed to a maximum investigating depth of approximately 5.0 feet based on an estimated two-way travel time of 8.0 nanoseconds per foot.

Following the UST investigation, areas around the proposed Terracon soil borings were scanned with the GPR unit and a DitchWitch 910 utility locator for buried utility line clearance and no further discussion regarding the utility clearance work will be made in this report. Photographs of the geophysical equipment used for the investigation and of the site are presented in Figure 1.

3.0 <u>DISCUSSION OF RESULTS</u>

Contour plots of the EM61 early time gate results and the EM61 differential results are presented in Figures 2 and 3, respectively. The early time gate results represent the most sensitive component of the EM61 instrument and detect metal objects regardless of size. The early time gate response can be used to delineate metallic conduits or utility lines, small, isolated, metal objects and areas containing insignificant metal debris. The differential results are obtained from the difference between the early time gate channel and late time gate channel of the EM61 instrument. The differential results focus on the larger metal objects such as drums and UST-size objects and ignore the smaller, insignificant, metal objects or debris.

The linear, EM61 early time gate anomalies intersecting UTM coordinates 2262877-E 12730032-N, 2262902-E 12730018-N, 2262927-E 12730016-N, 2262955-E 12730025-N, 2262979-E 12730029-N, 2263016-E 12729995-N, and 2263067-E 12729995-N are probably in response to buried lines or conduits.

GPR data suggest the EM61 differential anomalies centered near coordinates 2262968-E 12730023-N, 2262975-E 12730029-N and 2262989-E 12730030-N are in response to portions of buried conduits or miscellaneous metal objects. The remaining EM61 anomalies are probably in response to utility line-related objects, known surface objects, buried miscellaneous objects, or portions of conduits. The EM61 and GPR investigation suggests the proposed ROW/PUE area does not contain metallic USTs. Please refer to Figures 2 and 3 for additional (detailed) information regarding the geophysical findings at this site.


4.0 <u>SUMMARY & CONCLUSIONS</u>

Our evaluation of the EM61 and GPR data collected across the geophysical survey area at the Waterville Equities I LLC property (Parcel 332) located at 2605 Raeford Road in Fayetteville, North Carolina provides the following summary and conclusions:

- The combination of EM61 and GPR surveys provided reliable results for the detection of metallic USTs across the survey area within the depth interval of 0 to 6 feet.
- The linear, EM61 early time gate anomalies intersecting UTM coordinates 2262877-E 12730032-N, 2262902-E 12730018-N, 2262927-E 12730016-N, 2262955-E 12730025-N, 2262979-E 12730029-N, 2263016-E 12729995-N, and 2263067-E 12729995-N are probably in response to buried lines or conduits.
- The EM61 and GPR investigation suggests the proposed ROW/PUE area does not contain metallic USTs.

5.0 <u>LIMITATIONS</u>

EM61 and GPR surveys have been performed and this report prepared for Terracon Consultants, Inc. in accordance with generally accepted guidelines for EM61 and GPR surveys. It is generally recognized that the results of the geophysical surveys are non-unique and may not represent actual subsurface conditions. Some of the EM61 and GPR anomalies interpreted as possible/probable USTs, utility lines, conduits, steel reinforced concrete, or miscellaneous, metal debris may be attributed to other surface or subsurface features and/or interference from cultural features.

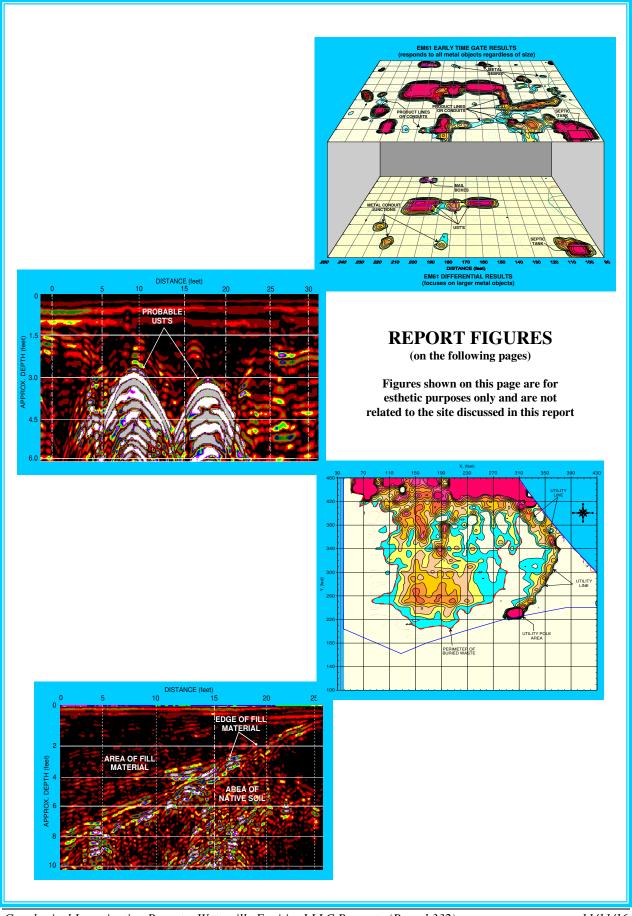







DITCHWITCH UTILITY LOCATOR

EM61 METAL DETECTOR

GROUND PENETRATING RADAR UNIT

The photographs show the DitchWitch 910 utility line locator, the Geonics EM61-MK2A metal detector and the GSSI SIR-3000 ground penetrating radar (GPR) unit that were used to conduct the geophysical investigation across the area of interest at Parcel 332.



The red polygon in the aerial photograph represents the approximate perimeter of the geophysical survey area at the Waterville Equities I LLC property (Parcel 332) located along Raeford Road in Fayetteville, North Carolina.





Terracon Consultants, Inc.

Waterville Equities I LLC Property
Parcel 332
Fayetteville, North Carolina

GEOPHYSICAL EQUIPMENT & SITE PHOTOGRAPHS

11/11/16 FIGURE 1

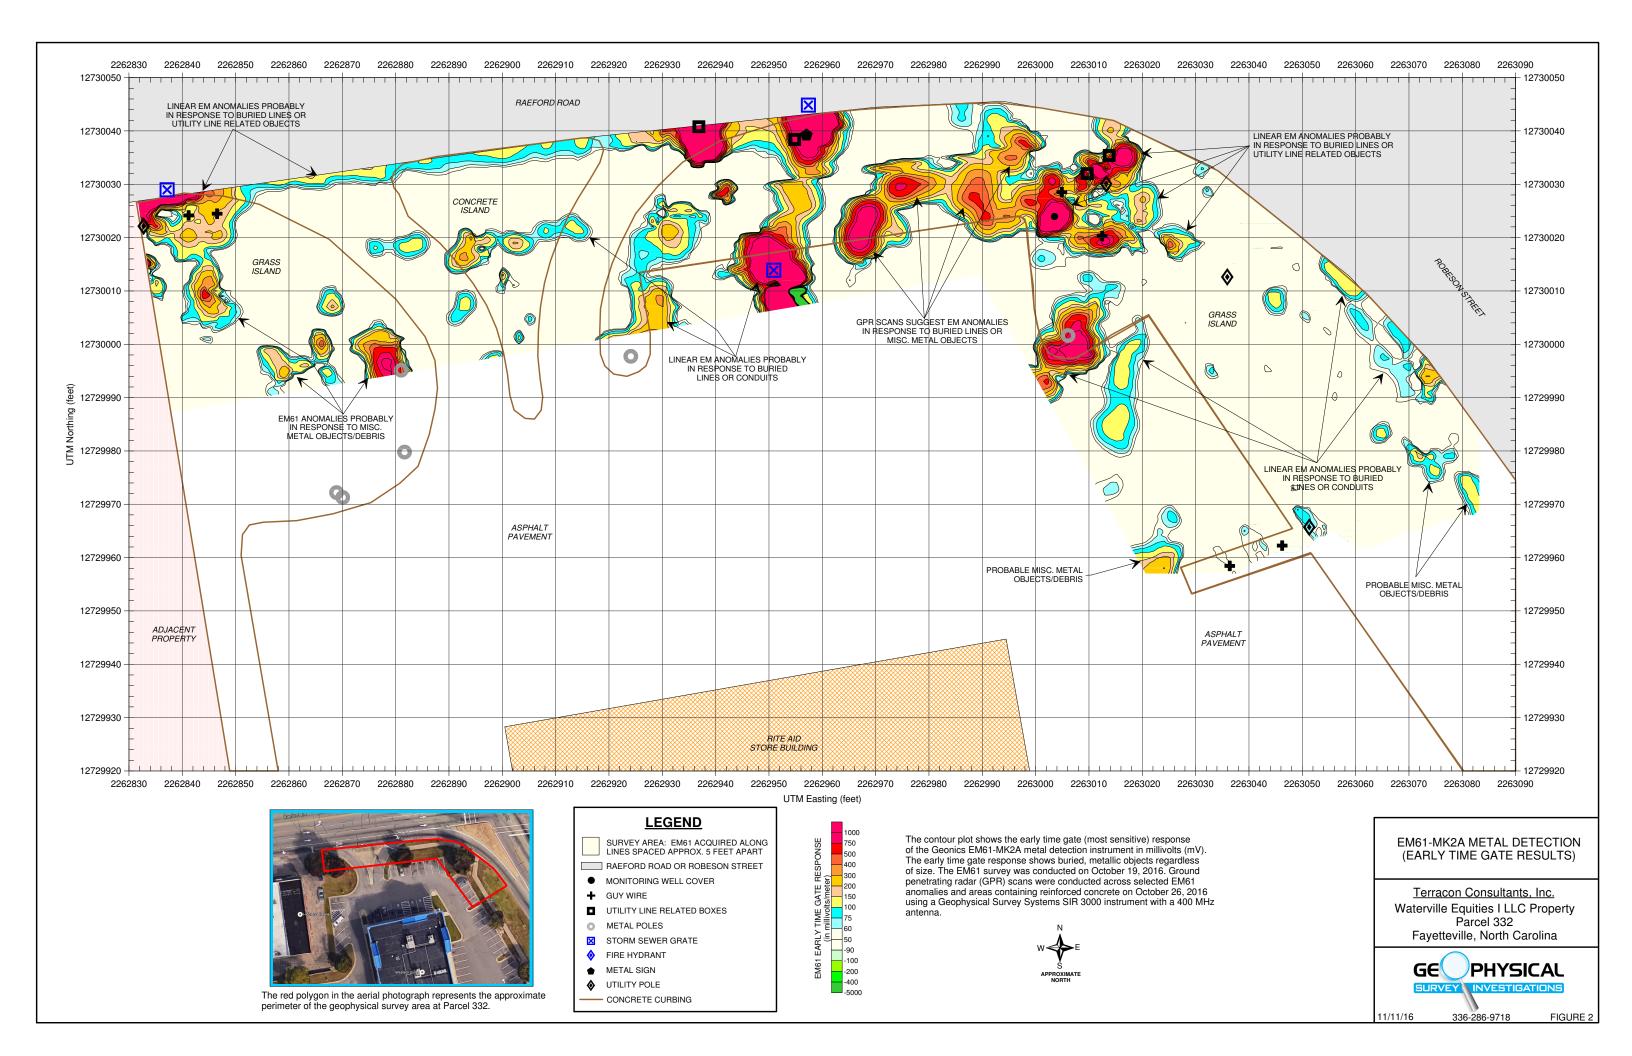

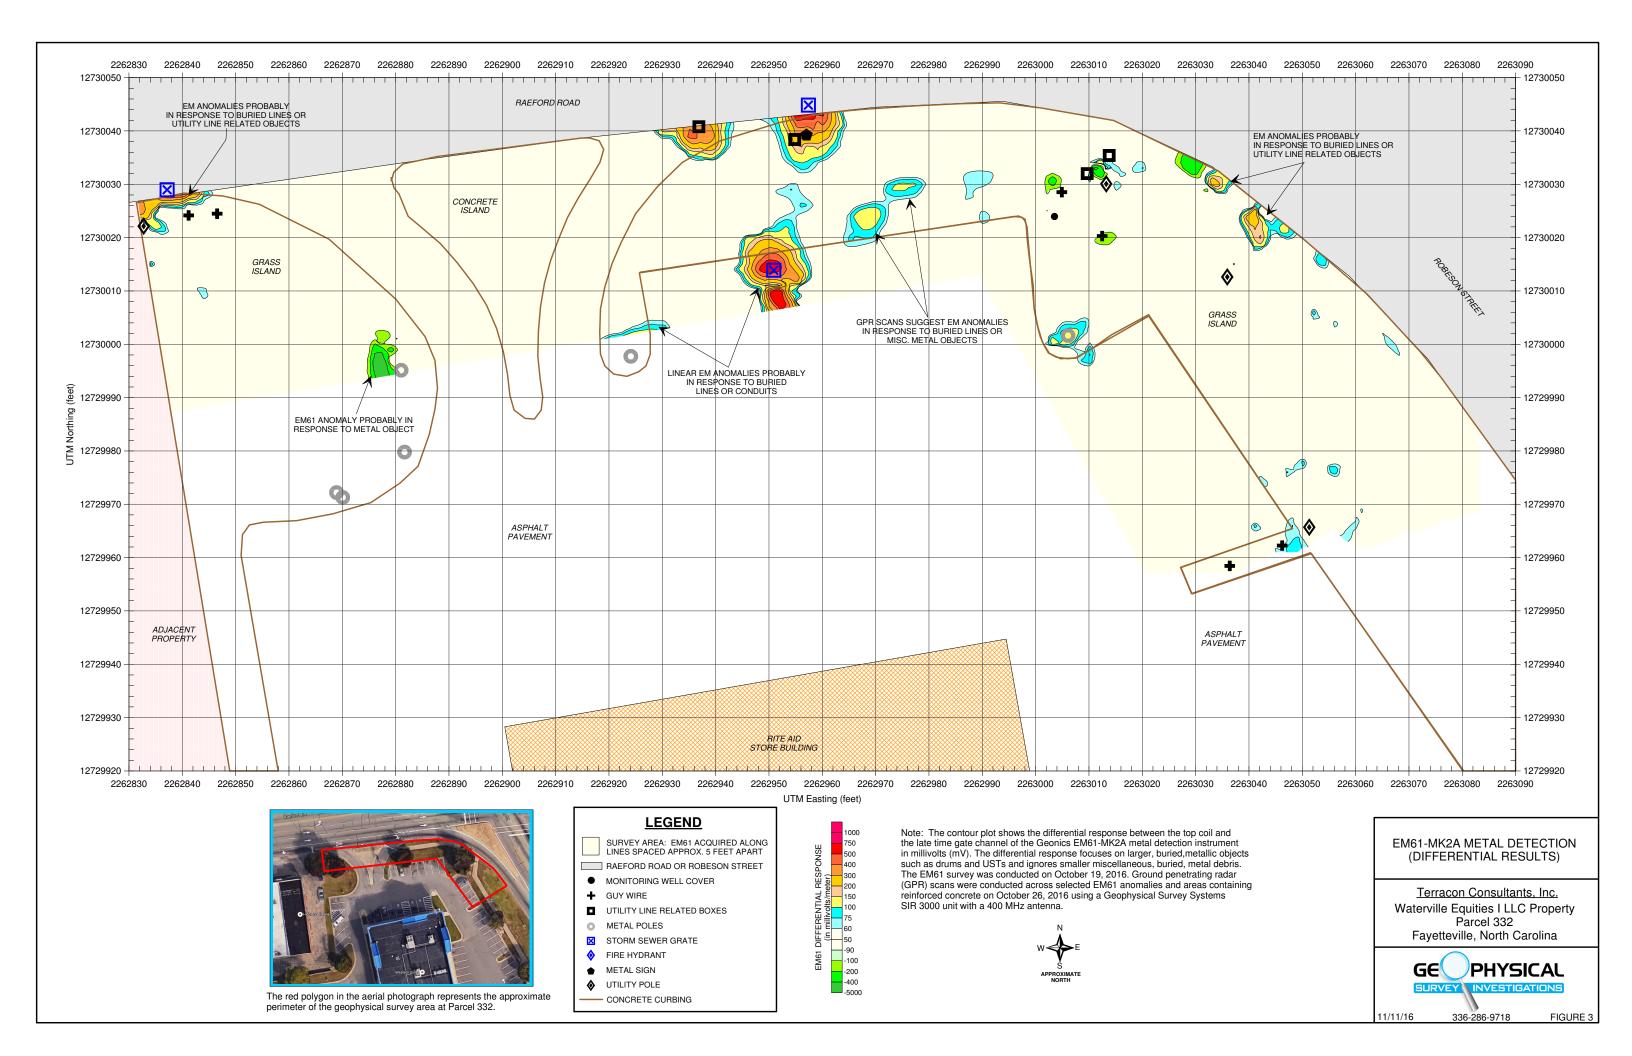

APPENDIX B SOIL BORING LOGS

20 20	1 1 1 2		200
l i+k	201	Oan	Log
LILI	101	USY	LUS

Boring ID: 5B-24
Project Number:

Projec Sit	t Number: e Location: Weather: .ogged By:			Fa 10 /50	70167490 yetteville, CNNY EHS				Start Date/Time: \/9/ (1350) End Date/Time: \/9/ (1400) Boring Diameter: 2" Total Depth: 5 1445	Sample Method Hand Auger Macro-Core Split Spoon	Drilling Method X DPT HSA Mud Rotary
	rilling Sub: Drill Rig:		Truck	Regiona	al Probing	Services	x 51	110	Water Level: Na Well Installed: NO	☐ Shelby Tube	☐ Air Rotary ☐ Rock Core
Depth (ft bls)	Recovery (inches)	Blow Counts (n)	PID ppm / ppb	CH4	CO ₂	02	H ₂ S	U.S.C.S	(Depth interval) Color, MAIN COMPONENT, minor component(s), structure, moisture, angularity, odor, staining	Lab Sample: ID, analysis, time	Drilling method, tooling, depth
0-1	12/12	41	₹0.1					5M	(0-1) SAND-orang/ton. Organic matter moist		
1-3	24/24	ر.	26.1					5M	(1-3)SAND.SAA		
3.5	24/24	~	۷٥.۱					CL	(3-5)CLAY. oreneg/ten. soft-moist		
5.7	24/24		10.1					CL	(5-7) SHA		
7-9	24/24	-	<0.1					CL	(7-9) (LAY gray/for/red. mostled stiff. moist	Sample akos at 1405	
9-11	24/24		<0.1					CL	(9-11) SAIA		
11-13	124		KO.1		18.			CL	(11-13) SAA		
13-15	24/24	•	40.1					5m	(13-15) SAND. ten/orange. Moist		
-						2	di .		Boring terminal at 15 Abls		
					f						
Notes:	s per million	1	ppb: part	s per billio	ın .				NA= Not applicable bls = belo	w land surface	

Lithology Log

Boring ID: 5B-25

Terracon

	ring ID:	20	25		20167106				Start Date/Time: 11/9/16 14/0	Sample Method	Drilling Method
	Number:				70167490 etteville,			-	Start Date/Time: 1/9/16 14/0 End Date/Time: 1/9/16 14/20	☐ Hand Auger	X DPT
	Location: Weather:		V			INC			Boring Diameter:	X Macro-Core	☐ HSA
	gged By:		W	0,0	MNY				Total Depth: 15 Gbs	☐ Split Spoon	☐ Mud Rotary
	lling Sub:				l Probing	Services			Water Level: Na	☐ Shelby Tube	☐ Air Rotary
	Drill Rig:	5210	Truc	ck mo	unt (SPEDRO	be 5	410	Well Installed:		☐ Rock Core
Depth (ft bls)	Recovery (inches)	Blow Counts (n)	PID ppm / ppb	CH4,		02	H ₂ S	U.S.C.S	(Depth interval) Color, MAIN COMPONENT, minor component(s), structure, moisture, angularity, odor, staining	Lab Sample: ID, analysis, time	Drilling method, tooling, depth
0-1	1/12		۷٥،۱		85.			SM	(0-1)SAND.tan.dry		
1-3	2 ¹ /24	•	۲0.۱	×				SM	2 2		6
3-5	24/24		۰۵۰۱					CL	(3-5)CLAY, red, moist		
5-7	1/24	-	<0.1					CL	(5-7)SAA		
	124	٧	(0.1					CL	(7-9) SAA		
9-11	124	-	(0,1					and the same of th	(9-11) CLAY motified. gray/tay/red. moist		
	21/24 /24	-	KO. 1					CL	(11-13) SAA	Scriple Okos at 1425	
13-15	124		⟨0.					5M	(13-15)SAND. overg./don. moist	4 1 2	,
						÷			Boring terminate at 15 fibls		
					9	=			141	,	٠
									a a		
Notes:	nor estili-		pok: nor	ts per billio	20				NA= Not applicable bls = belo	ow land surface	
ILb baits	P 4		Francis								

Lithology Log

Terracon

itnology i		e 0) 1						lerraco	n	
Borin Project Nu	umber:	D1	5-26		70167490				Start Date/Time: 1/9/16 1435	Sample Method Hand Auger	Drilling Method
Logg	eather: ed By:		10	0,51	Vetteville, ANN EHS I Probing	/			Boring Diameter: Total Depth: 15 (46) Water Level: Na	X Macro-Core Split Spoon Shelby Tube	☐ HSA ☐ Mud Rotary ☐ Air Rotary
	g Sub: rill Rig:		inck	Wegions		2 roph	Obo 5	410	Well Installed:		☐ Rock Core
Depth (ft bls)	(inches)	Blow Counts (n)	dqq / mqq	H	CO	0,	H ₂ S	U.S.C.S	(Depth interval) Color, MAIN COMPONENT, minor component(s), structure, moisture, angularity, odor, staining	Lab Sample: ID, analysis, time	Drilling method, tooling, depth
)-1 12	/12	-	(0.1					SM	SANTO-1) SAND by red, dry		
-3 2/	24	-	<0.1					CL	(1-3) CLAY red. law plasticity. moist		
-52/	24		⟨0.1					CL	(3-5) SAA		
5-7 2	24	_	₹0. l		×			CL	(5-7) CLAY. gray/ton/red. mottled. moist		
	24	L	10.1				82	CL	(7-9) SAA		7
1-11 2	24	-	<0.(CL	(9-11) SAA	O Confidence in a service of the confidence of t	***************************************
1-13 20	1/24		۷٥,۱					CL	(11-13)ZAH		
3-15 2/	1/24	-	2.5			6		CYSM	(13-14) SAA (14-15) SAND. oraye/ton. -moist	Simple Okus at 1450	
Ē						6.4			Boring terminated ast 15 ftbls		
	1						5 4	ja.	8	α,	n
		Å		P						-	
				×							
				=,							
Notes:											
									NA= Not applicable bls = bel	ow land surface	
om: parts p	er millio	n	ppb: part	s per billi	OH				nate not applicable bis a bei		

Lith	ology	Log
TIPLI.	0,061	

Terracon

bls = below land surface

NA= Not applicable

ppb: parts per billion

ppm: parts per million

Во	ring ID:	51	3-21						Start Date/Time: 1/9/16 1505	Sample Method	Drilling Method
	t Number:				70167490 etteville,	NC			End Date/Time: 1/9/16 1515	☐ Hand Auger	X DPT
	Weather:					IVC			Boring Diameter: 2"	X Macro-Core	□ HSA
	ogged By:			10,50	EHS				Total Depth: 15 466	☐ Split Spoon	☐ Mud Rotary
	illing Sub:	-		Regiona	Probing	Services		- CT 90 CH - S	Water Level: Na	☐ Shelby Tube	☐ Air Rotary
	Drill Rig:		Truck	Mant		ordiae	5410		Well Installed:		☐ Rock Core
Depth (ft bls)	Recovery (inches)	Blow Counts (n)	qdd / mdd	CH4	CO ₂	ő	H ₂ S	U.S.C.S	(Depth interval) Color, MAIN COMPONENT, minor component(s), structure, moisture, angularity, odor, staining	Lab Sample: ID, analysis, time	Drilling method, tooling, depth
0-1	1/12	-	201				N	SM	(0-1) SAND, taniday		
1-3	24/24		(0.1					5M	(1-3)SHA		
	24/24	-	<0.1					CL	(3-5) CLAY. ton. stiff. moist		0
5-7	24/24	-	₹७.(CL	(5-7) CLAY. gray/ron.		
7-9	24/24		(O. I						(7-9) CLAY. SAIA		
9-11	24/24	_	0.1					C1/5C	(9-10) SANDY CLAY, mother, most	Somple aros at 1520	
11-13	24	-	20.1					50	(11-13) SAA		
13-15	24/24	_	⟨0.1					SC	(13-15) SAA	,	
0									Boring terminated at 15 fibls	4	
											S.
Notes:				1		1					

APPENDIX C

LABORATORY ANALYTICAL REPORTS AND CHAIN-OF-CUSTODY FORMS







Hydrocarbon Analysis Results

Client: TERRACON

Address: 2401 BRENTWOOOD ROAD

RALEIGH NC

Samples taken Samples extracted Samples analysed Tuesday, November 8, 2016 Tuesday, November 8, 2016

Monday, November 14, 2016

Contact: STEVE KERLIN Operator HENDRIX

Project: #70167490

													H09382
Matrix	Sample ID	Dilution used	BTEX (C6 - C9)	GRO (C5 - C10)	DRO (C10 - C35)	TPH (C5 - C35)	Total Aromatics (C10-C35)	16 EPA PAHs	BaP		Ratios		HC Fingerprint Match
										% light	% mid	% heavy	
s	SB-24	41.3	<1	<1	<1	<1	<0.21	<0.03	<0.004	0	0	100	Residual.PHC (P)
S	SB-25	42.6	<1.1	<1.1	2.4	2.4	1.8	0.1	<0.004	0	81.9	18.1	Deg Fuel (FCM) 87.2%
S	SB-26	16.4	<0.41	<0.41	0.78	0.78	<0.08	<0.01	<0.002	0	0	100	Residual.PHC (FCM) (P) 50.4%
S	SB-27	41.3	<1	<1	2.6	2.6	2.1	0.25	0.004	0	70.1	29.9	Deg.PHC (FCM) (P) 62.2%

Initial Calibrator QC check C

OK

Final FCM QC Check OK

114.4 %

Results generated by a QED HC-1 analyser. Concentration values in mg/kg for soil samples and mg/L for water samples. Soil values are not corrected for moisture or stone content Fingerprints provide a tentative hydrocarbon identification. The abbreviations are:- FCM = Results calculated using Fundamental Calibration Mode: % = confidence for sample fingerprint match to library

(SBS) or (LBS) = Site Specific or Library Background Subtraction applied to result : (PFM) = Poor Fingerprint Match : (T) = Turbid : (P) = Particulate present

enacon prentucat 19001 Boad RAPID ENVIRONMENTAL DIAGNOSTICS **CHAIN OF CUSTODY AND ANALYTICAL** REQUEST FORM

Email:

Project Ref.: Contact:

Phone #:

Collected by:

Client Name:

Address:

RED Lab, LLC Wilmington, NC 28409 5598 Marvin K Moss Lane MARBIONC Bldg, Suite 2003

BTEX, GRO, DRO, TPH, PAH total Each sample will be analyzed for aromatics and BaP

24 Hour 48 Hour 48 Hour 49 Hour 48 Hou			Date/Time		Accepted by	Date/Time		Relinquished by	Relinq
As Hour As Hour Sym) Sample D UVF GC BTEX Total Wt. Tare Wt.	C	<u> </u>	11/4 6:00	i (gladineni) sasioni (revindeneni)	大いかり	SIDI 9/1/1		Shirtan	Ethon
24 Hour 48 Hour (5/M) Sample ID UVF GC BTEX Total Wr. Tare Wr.			Date/Time		Accepted by	Date/Time		ished by	Relinq
A Hour 48 Hour 48 Hour 49 Hour 48 Hour 49 Hour 48 Hour 5 5 1 1 1 1 1 1 1 1	ED Lab USE ONLY	2							Comments:
24 Hour (5/W) Sample ID UVF GC BTEX Total Wt. Tare Wt. 5					,这是是这个时间,他们也是这个时间,他们就是这个时间,我们就是这个时间,他们就是这些一个时间,他们也是这个时间,他们也是这个时间,他们也是这个时间,他们也是这个				
24 Hour (5/W) Sample D				/					
24 Hour 48 Hour (5/M) Sample ID UVF GC BTEX Total Wt. Tare Wt.			And to provide the control of the co						
Tall requessed Matrix Sample D						0			
All requested Matrix Sample ID UVF GC BTEX Total Wt. Tare Wt.	The second secon		Andrews Committee Committee of the Commi	And algebraichte armeiligt for inchessaring			1		onsignation of the contract of
A Neguested Matrix Sample D UVF GC BTEX Total Wt. Tare Wt.			THE THE PROPERTY OF THE PROPER	e sjillekijakorjavita vomentormili smootomili kantinisti					annea de la compressión del compressión de la co
24 Hour 48 Hour 5/W)			manufacturate describes activities for the principality	Condition to service services and services are services and services are services and services and services and services are services are services and services are services and services are services are services and services are services are services are services a			// (
24 Hour 48 Hour (5/W) Sample ID UVF GC BTEX Total Wt. Tare Wt. 40.5 S.	And the second s		And were the state of the state	styde benedates in the the spirit selection to the	ALLEGATION OF THE STATE OF THE		×		· · · · · · · · · · · · · · · · · · ·
24 Hour 48 Hour (5/W) Sample ID UVF GC BTEX Total Wt. Tare Wt.	And the second s		And the second s	Sychicking and the production of the state o	and independent of the state of	and Chance of the Chance of th	X		And the state of t
24 Hour (5/W) Sample ID UVF GC BTEX Total Wt. Tare Wt. 405 S SR-24 US.7 S1.2 US.7 S1.2 US.7 S1.4 US.7	And the second s		And the second s	An Wagnerous samme value of the same of th	gorin gada-randskonglatikis sastratik († 141) sastratik i kipik-v-jardvokraji (jakasamardvokratik				
24 Hour 48 Hour (5/W) Sample ID UVF GC BTEX Total Wt. Tare Wt. 405						A MAN AND AN AND AND	V .		
24 Hour 48 Hour (5/W) Sample ID UVF GC BTEX Total Wt. Tare Wt. 405								/	
24 Hour 48 Hour (S/W) Sample ID UVF GC BTEX Total Wt. Tare Wt. 405 S SB-24 S S13 45.7 S SB-26 S1.4 45.7 S1.4 45.1 S SB-27 S1.4 45.1 S SB-27 S1.4 45.1 S SB-27 S1.4 45.1 S SB-27 S1.4 S									
24 Hour 48 Hour (5/W) Sample ID UVF GC BTEX Total Wt. Tare Wt. 405									
24 Hour 48 Hour (S/W) Sample ID UVF GC BTEX Total Wt. Tare Wt. 405 S SB-24 S S1.1 Y4.8 Y5.1 S SB-26 S1.2 Y5.1 Y5.1 S SB-26 S1.4 Y5.1 Y5.1 S SB-26 S1.4 Y5.1 S1.4 Y5.1 S SB-26 S1.4									
1A Requested Matrix Sample ID UVF GC BTEX Total Wt. Tare Wt.									
1A Requested Matrix Sample ID UVF GCBTEX Total Wt. Tare Wt.	6.	51.4		<	8-21	5			149 1520
1A Requested Matrix Sample ID UVF GCBTEX Total Wt. Tare Wt.		51.2			3-26	<i>S</i>			1450
1A Requested Wattux Sample ID UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF S.6-24 UVF GC BTEX Total Wt. Tare Wt. 405 S.6-24 UVF		518			R-25	V.			11/9 1425
24 Hour 48 Hour (S/W) Sample ID UVF GC BTEX Total Wt. Tare Wt.		51.		X	8-24		<u>\</u>	36	_
IAI Requested Wattix	-	-	ac piev	UVF	Sample ID	(W/S)	-	_	Date/Time
The Destriction of the Control of th	-		CCOTEV		Samuel D	Matrix		TAT Requ	Sample Collection