


SECTION ALONG C OF BRIDGE

**NOTES**  
 GENERAL DRAWING INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED 9/5/2018.  
 BRIDGE ORIENTATION CONFORMS TO EXISTING BRIDGE PLANS.


**SCOPE OF WORK**

- PARTIALLY REMOVE TOP OF BRIDGE DECK CONCRETE BY SCARIFICATION AND SHOTBLASTING METHODS.
- OVERLAY PREPARED TOP OF BRIDGE DECK WITH POLYESTER POLYMER CONCRETE (PPC).
- REMOVE EXISTING JOINT MATERIAL AND INSTALL FOAM JOINTS.
- GROOVE PPC BRIDGE DECK.
- CLEAN AND REPAINT EXISTING STRUCTURAL STEEL.
- REMOVE DEBRIS FROM TOP OF EXISTING END BENT AND BENT CAPS, AND APPLY EPOXY COATING.
- REMOVE UNSOUND CONCRETE AND PROPERLY PREPARE EXISTING END BENT AND BENT AREAS FOR SHOTCRETE AND CONCRETE REPAIR.

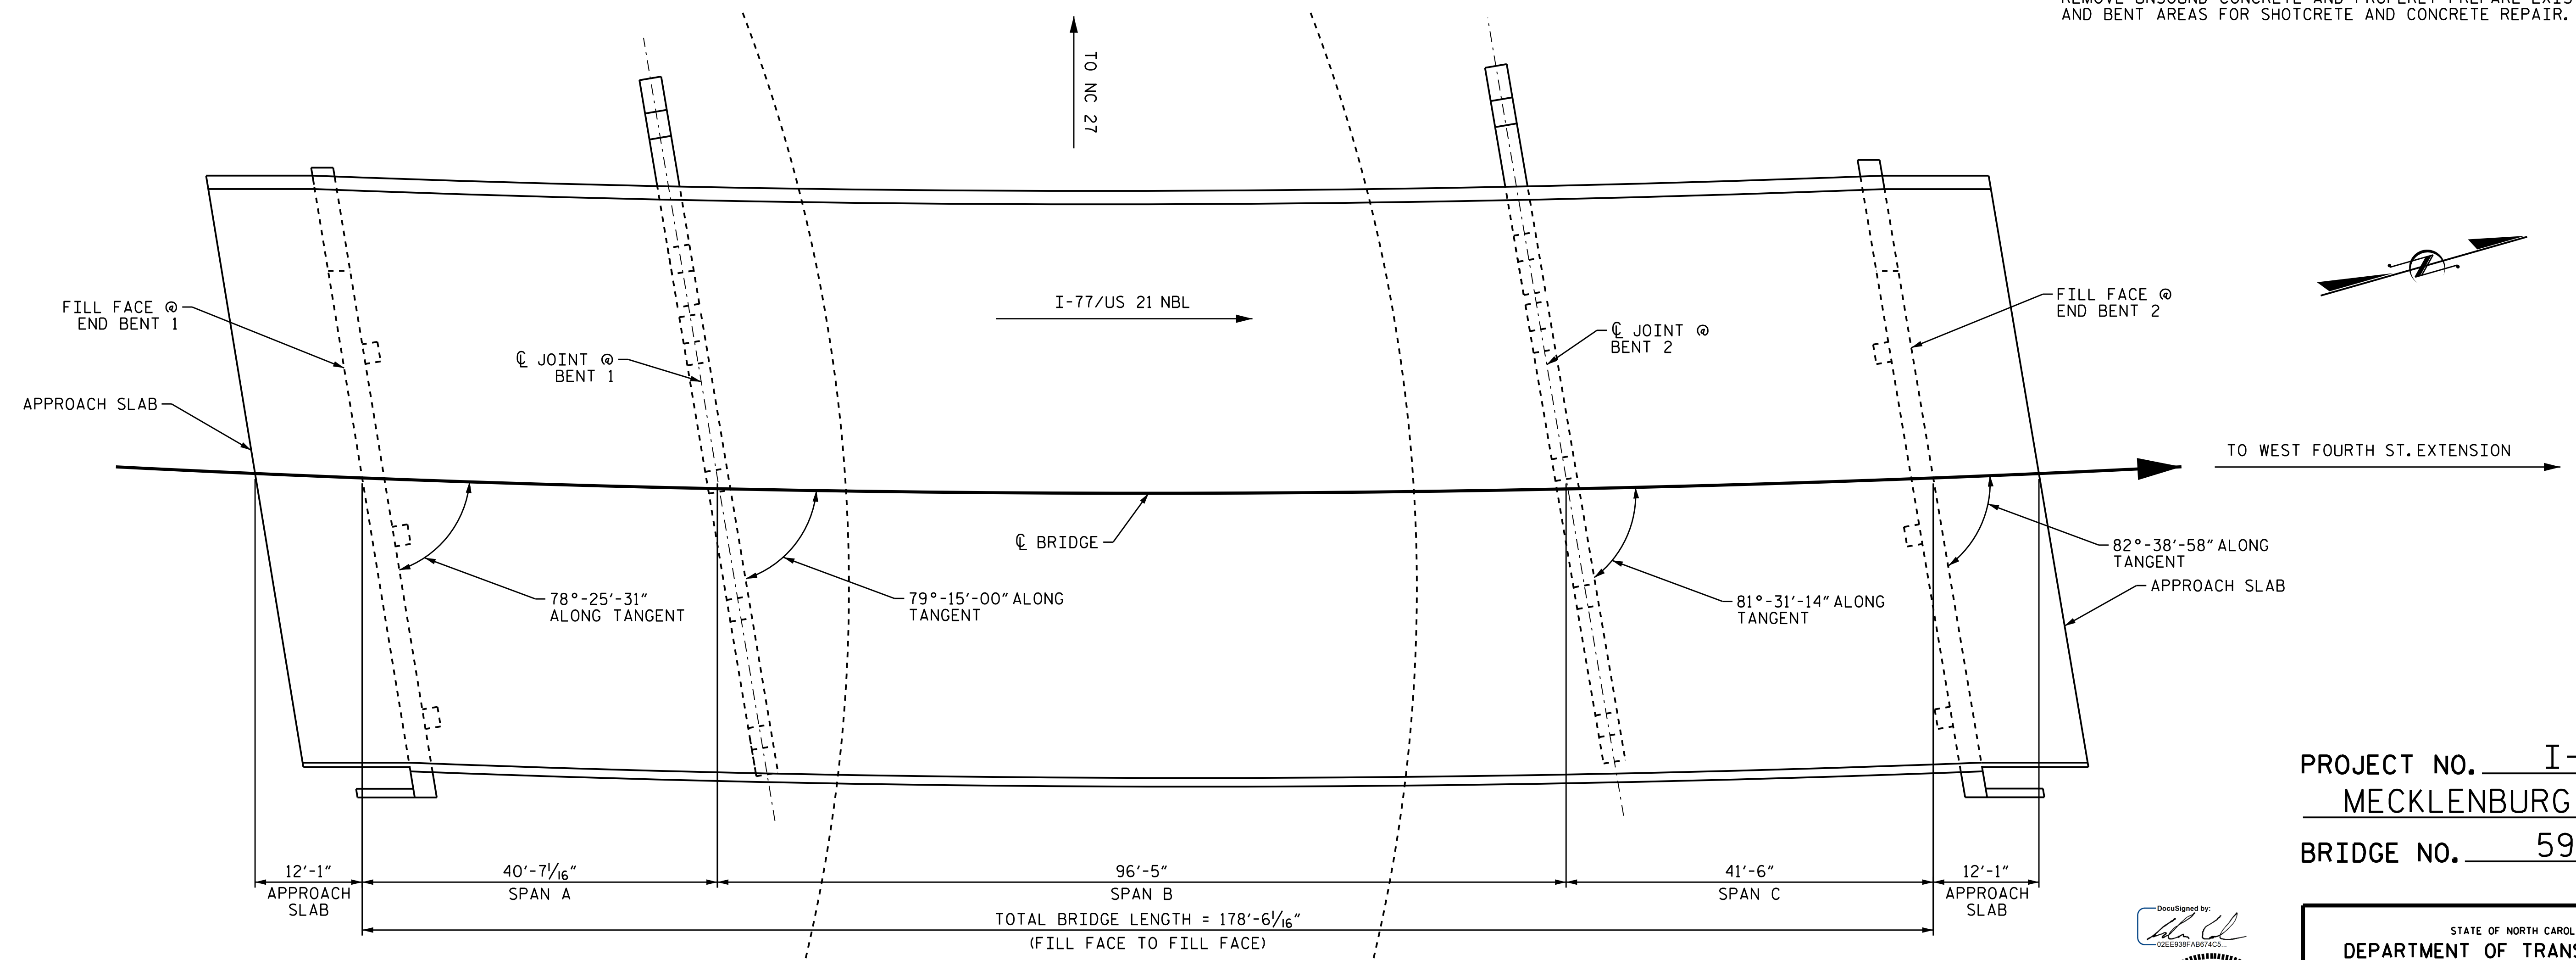

PLAN  
 (FOUNDATIONS NOT SHOWN FOR CLARITY)

I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED ACCORDING TO THESE PLANS OR AS NOTED HEREIN.  
 \_\_\_\_\_  
 RESIDENT ENGINEER DATE

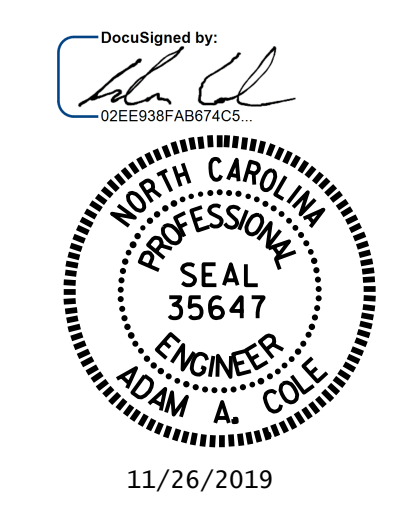

PROJECT NO. I-5769  
MECKLENBURG COUNTY  
 BRIDGE NO. 590221

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH  
 GENERAL DRAWING  
 FOR BRIDGE ON I-77 NBL  
 OVER US 29/NC 27  
 (W. MOREHEAD ST.)

DRAWN BY : D.A. CANTRELL DATE : 08/2018  
 CHECKED BY : H.A. LOCKLEAR DATE : 09/2019

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S1-01
1			3			TOTAL SHEETS
2			4			8

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED