



**NOTES**  
 GENERAL DRAWING INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED 9/5/2018.  
 BRIDGE ORIENTATION CONFORMS TO EXISTING BRIDGE PLANS.

- SCOPE OF WORK**
- PARTIALLY REMOVE TOP OF BRIDGE DECK CONCRETE BY SCARIFICATION AND SHOTBLASTING METHODS.
  - OVERLAY PREPARED TOP OF BRIDGE DECK WITH POLYESTER POLYMER CONCRETE (PPC).
  - REMOVE EXISTING JOINT MATERIAL AND INSTALL FOAM JOINTS.
  - GROOVE PPC BRIDGE DECK.
  - CLEAN AND REPAINT EXISTING STRUCTURAL STEEL.
  - REMOVE DEBRIS FROM TOP OF EXISTING END BENT AND BENT CAPS, AND APPLY EPOXY COATING.
  - REMOVE UNSOUND CONCRETE AND PROPERLY PREPARE EXISTING END BENT AND BENT AREAS FOR SHOTCRETE AND CONCRETE REPAIR.

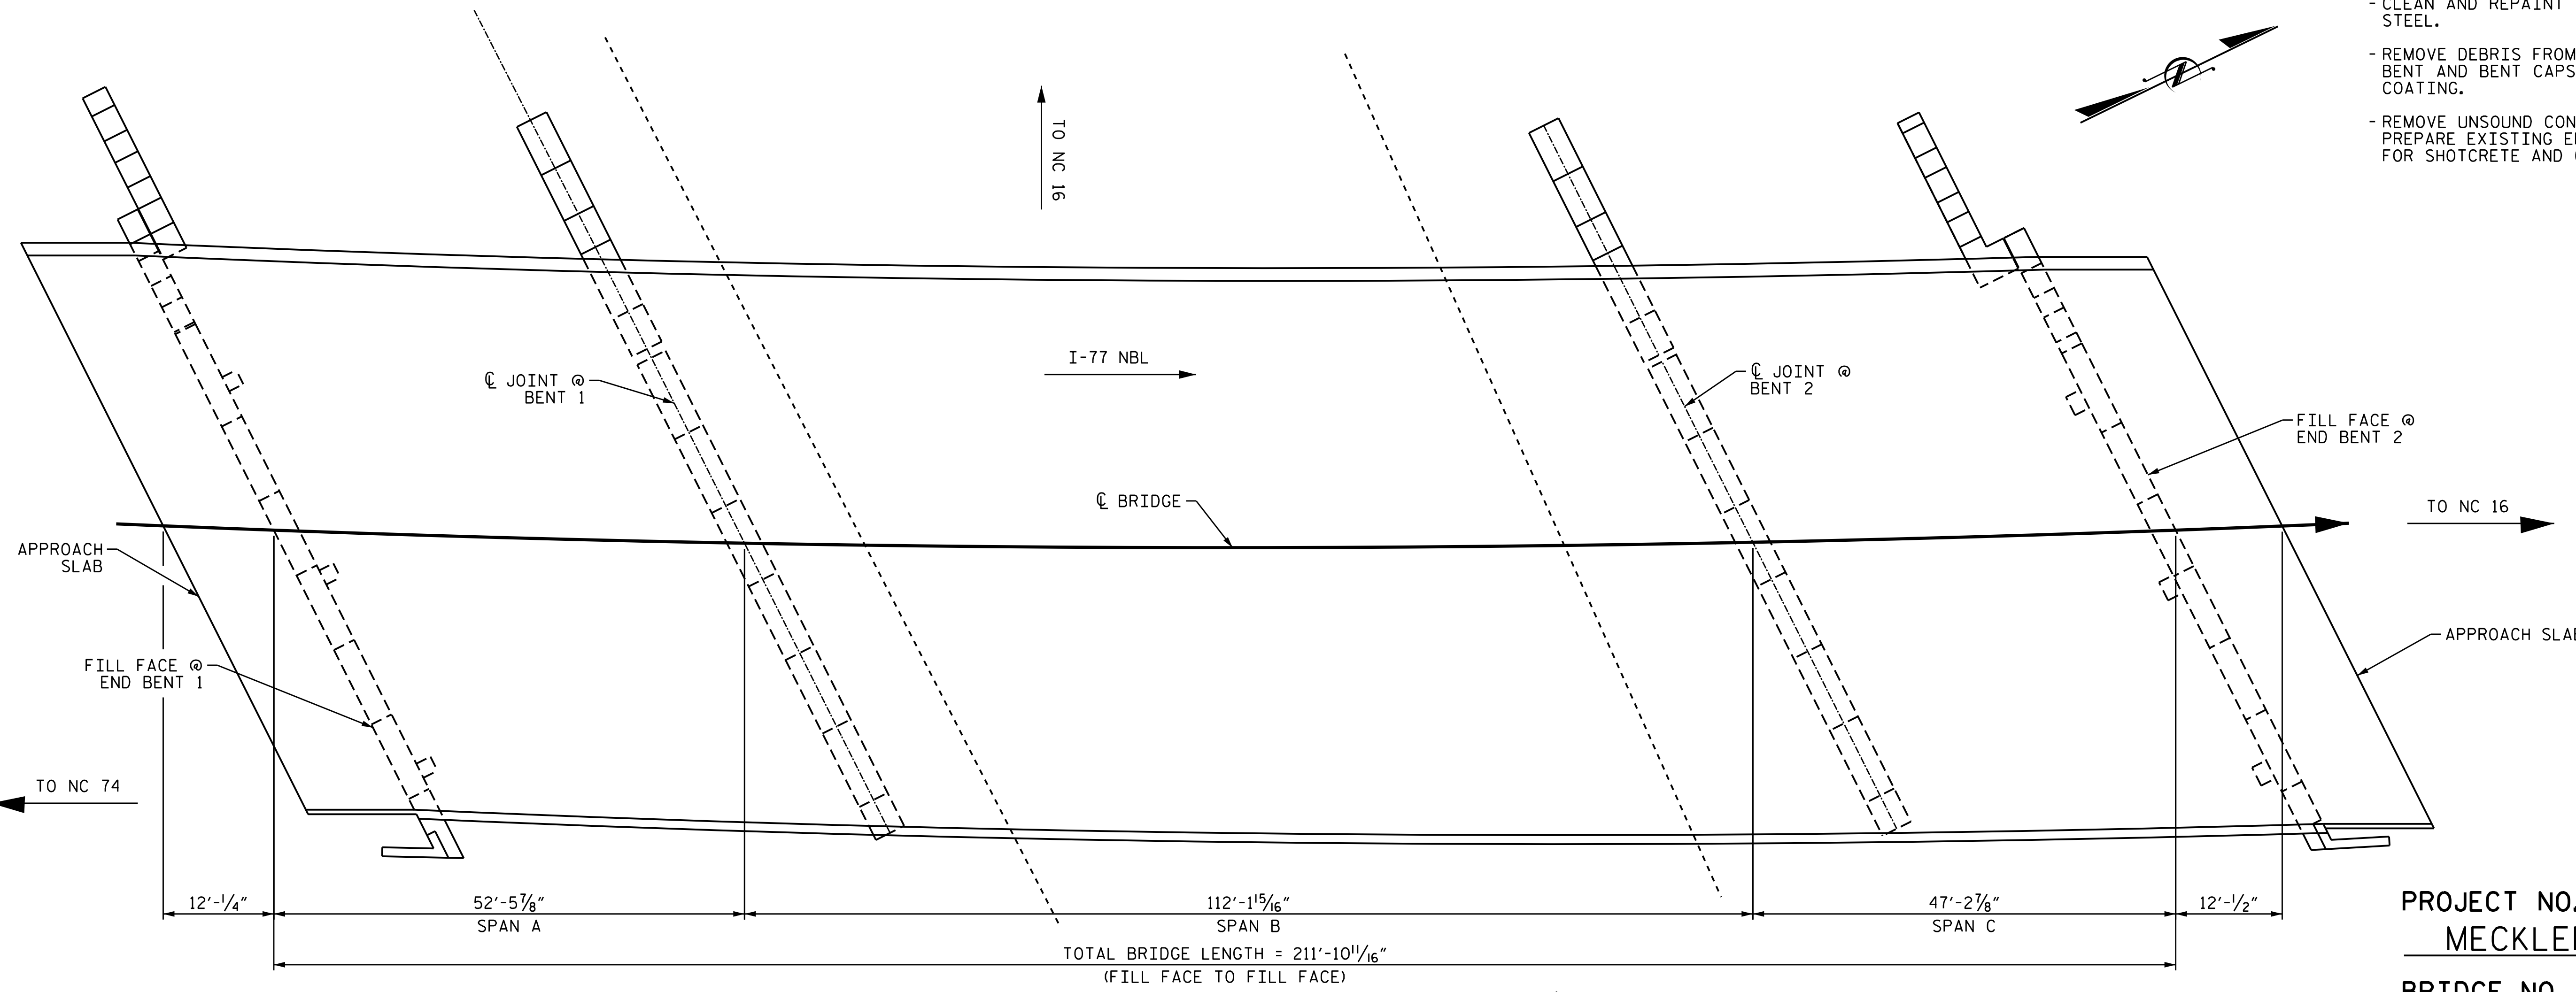

**PLAN**  
 FOUNDATIONS NOT SHOWN FOR CLARITY

PROJECT NO. I-5769  
MECKLENBURG COUNTY  
 BRIDGE NO. 590241

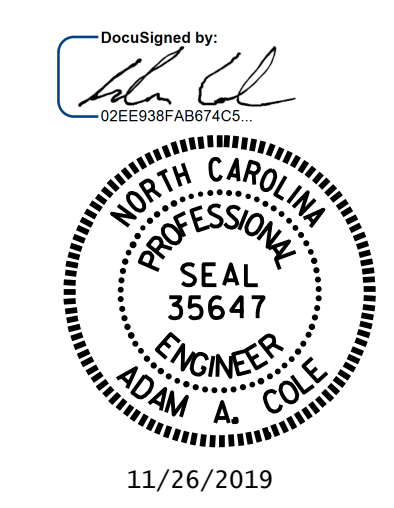

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH  
**GENERAL DRAWING**  
 FOR BRIDGE ON I-77 NBL  
 OVER WEST TRADE ST.

I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED ACCORDING TO THESE PLANS OR AS NOTED HEREIN.  
 \_\_\_\_\_  
 RESIDENT ENGINEER DATE

DRAWN BY : D.A. CANTRELL DATE : 10/2018  
 CHECKED BY : H.A. LOCKLEAR DATE : 09/2019

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S6-01
1			3			TOTAL SHEETS
2			4			8

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED