


NOTES
 GENERAL DRAWING INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED 9/5/2018.

BRIDGE ORIENTATION CONFORMS TO EXISTING BRIDGE PLANS.


SCOPE OF WORK

- PARTIALLY REMOVE TOP OF BRIDGE DECK CONCRETE BY SCARIFICATION AND SHOTBLASTING METHODS.
- OVERLAY PREPARED TOP OF BRIDGE DECK WITH POLYESTER POLYMER CONCRETE (PPC).
- REMOVE EXISTING JOINT MATERIAL AND INSTALL FOAM JOINTS.
- GROOVE PPC BRIDGE DECK.
- CLEAN AND REPAINT EXISTING STRUCTURAL STEEL.
- REMOVE DEBRIS FROM TOP OF EXISTING END BENT AND BENT CAPS, AND APPLY EPOXY COATING.
- REMOVE UNSOUND CONCRETE AND PROPERLY PREPARE EXISTING END BENT AND BENT AREAS FOR SHOTCRETE AND CONCRETE REPAIR.

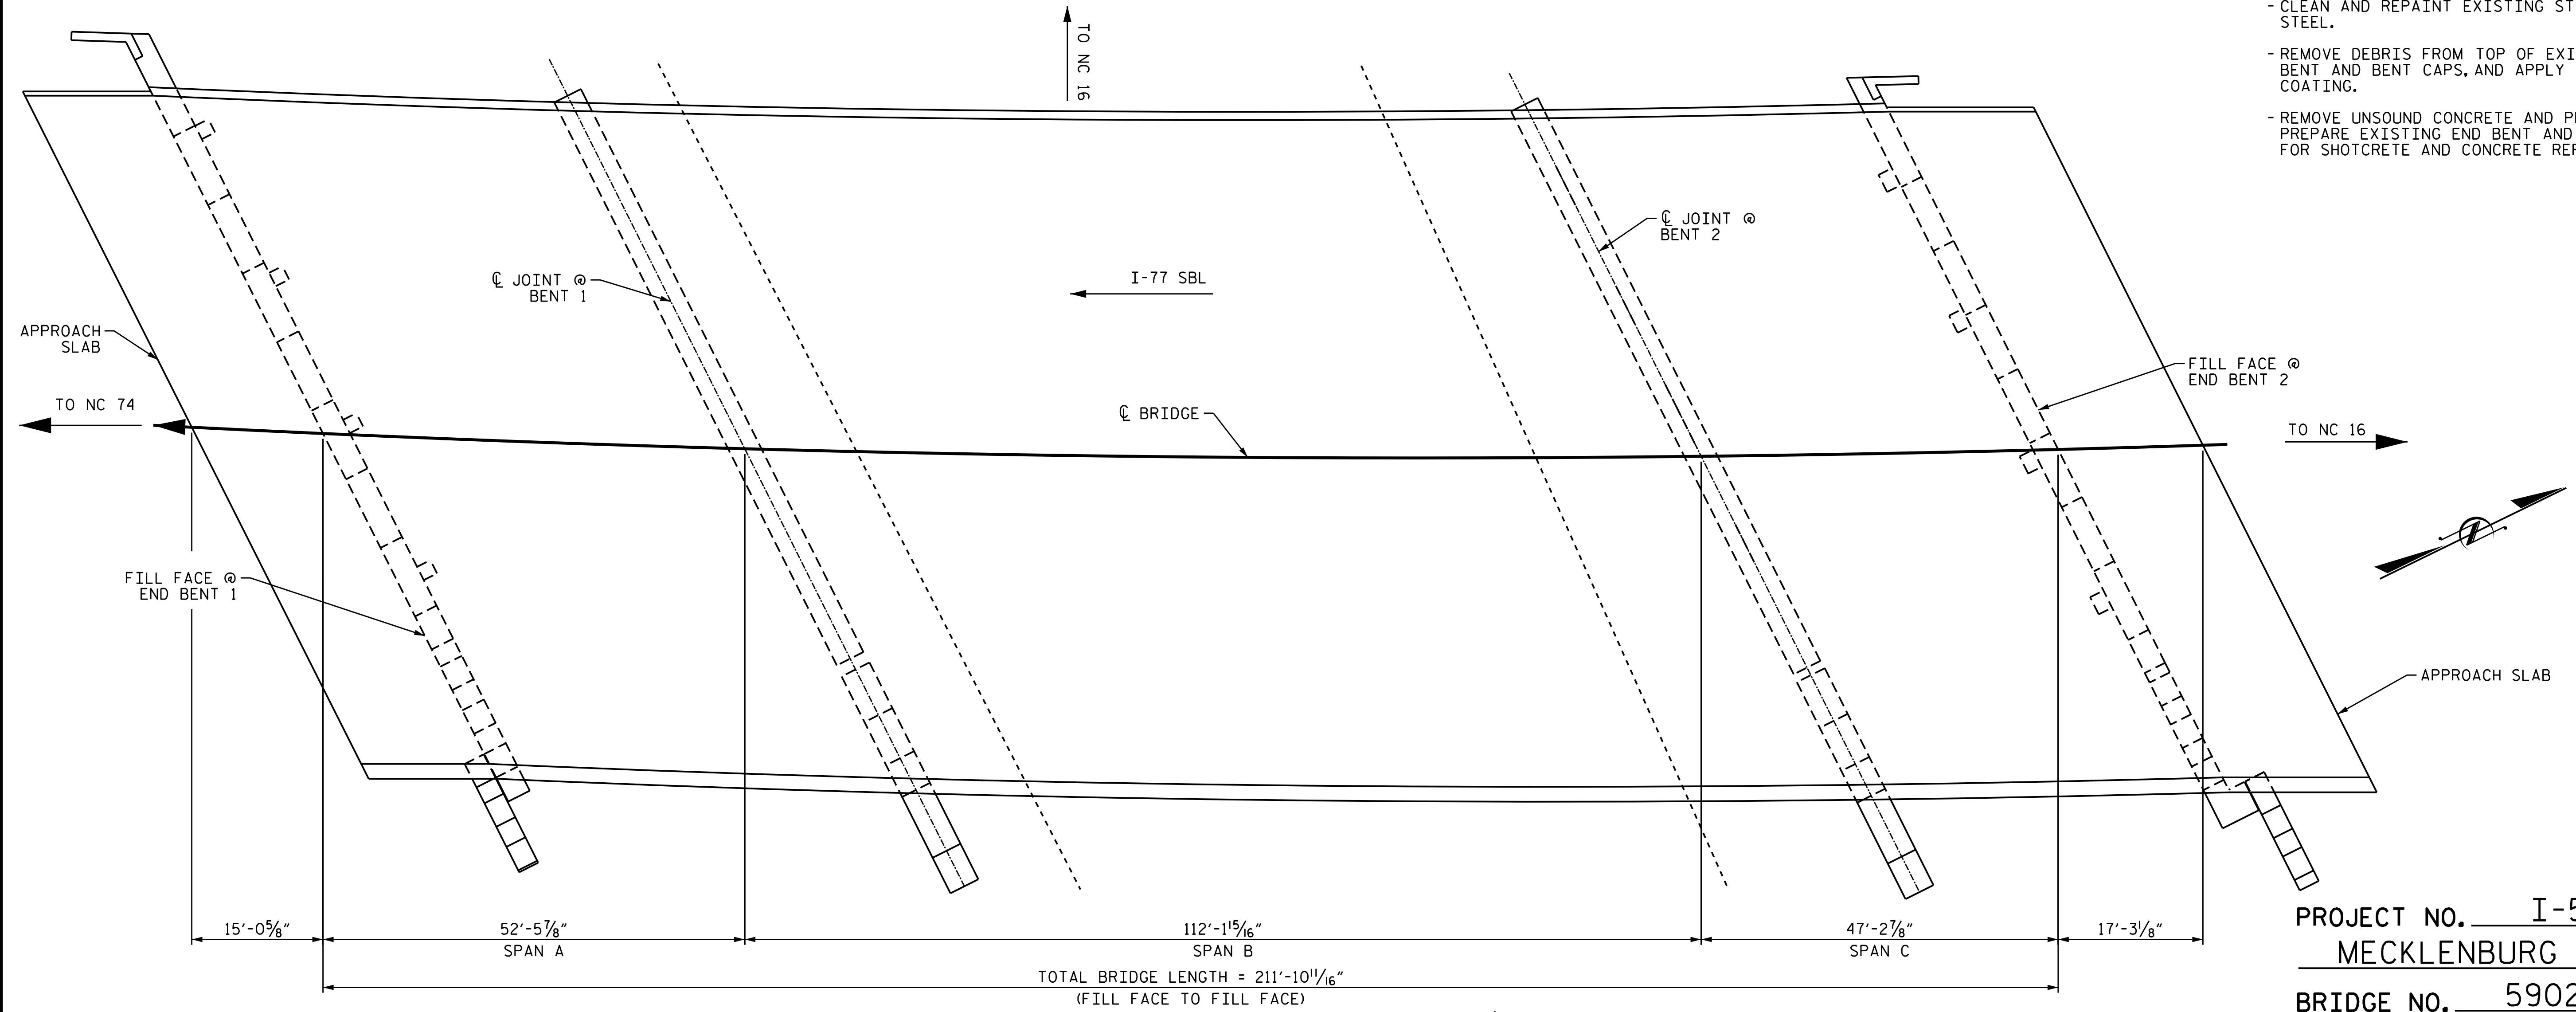

PLAN
 FOUNDATIONS NOT SHOWN FOR CLARITY

PROJECT NO. I-5769
 MECKLENBURG COUNTY
 BRIDGE NO. 590243

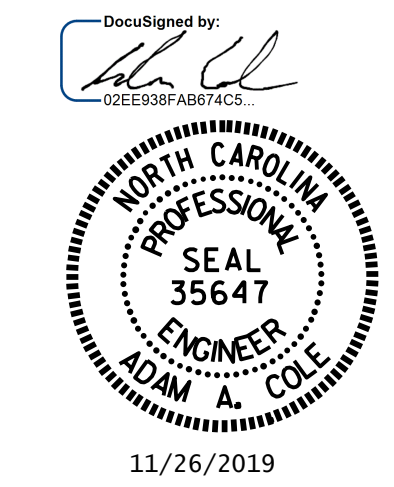

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH
GENERAL DRAWING
 FOR BRIDGE ON I-77 SBL
 OVER WEST TRADE ST.

I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED ACCORDING TO THESE PLANS OR AS NOTED HEREIN.
 RESIDENT ENGINEER _____ DATE _____

DRAWN BY : D.A. CANTRELL DATE : 10/2018
 CHECKED BY : H.A. LOCKLEAR DATE : 09/2019

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	SHEET NO.
1			3			ST-01
2			4			TOTAL SHEETS 8