


TOTAL BILL OF MATERIAL

BRIDGE NO.	GROOVING BRIDGE FLOORS	EPOXY COATED REINFORCING STEEL	POLLUTION CONTROL	CLASS II SURFACE PREPARATION	SURFACE PREPARATION FOR CONCRETE BARRIER RAIL	CONCRETE REPAIRS	SHOTCRETE REPAIRS	EPOXY RESIN INJECTION	FOAM JOINT SEALS FOR PRESERVATION	CLEANING & PAINTING EXISTING WEATHERING STEEL FOR BRIDGE NO...	MOLDED RUBBER SEGMENTAL EXPANSION JOINT	PAINTING CONTAINMENT FOR BRIDGE NO...	VOLUMETRIC MIXER	POURABLE SILICONE JOINT SEALANT	POLYESTER POLYMER CONCRETE MATERIALS
	SO. FT.	LBS.	LUMP SUM	SO. YDS.	SO. FT.	CU. FT.	CU. FT.	LIN. FT.	LIN. FT.	LUMP SUM	LUMP SUM	LUMP SUM	LUMP SUM	LIN. FT.	CU. YDS.
330439	15,693	-	-	51.3	-	-	0.6	-	227.7	-	-	-	-	154.0	63.7
330441	20,573	-	LUMP SUM	46.3	-	-	12.2	-	256.5	LUMP SUM	-	LUMP SUM	-	174.8	84.3
330451	10,854	-	LUMP SUM	33.6	-	-	-	-	123.0	LUMP SUM	-	LUMP SUM	-	126.0	44.9
330452	10,983	-	LUMP SUM	27.2	-	-	-	-	-	LUMP SUM	-	LUMP SUM	-	252.0	45.4
330454	25,008	-	LUMP SUM	60.4	-	-	-	-	-	LUMP SUM	-	LUMP SUM	-	510.0	102.6
330458	10,591	-	-	34.2	-	-	-	-	153.6	-	-	-	-	102.4	43.1
330479	8,731	-	-	27.2	-	25.7	3.2	6.0	-	-	-	-	-	232.8	34.5
330480	7,248	-	-	25.6	-	-	3.0	6.0	-	-	-	-	-	232.8	30.3
330481	6,944	-	-	31.1	-	-	-	4.0	116.6	-	-	-	-	120.0	29.0
330482	7,629	-	-	34.2	-	-	-	-	129.2	-	-	-	-	134.7	31.6
330486	12,617	-	-	28.6	-	-	-	-	-	-	-	-	-	264.0	52.1
330487	10,961	-	-	25.0	-	-	-	-	-	-	-	-	-	232.0	45.6
330488	11,769	-	LUMP SUM	38.6	-	-	5.1	5.0	146.8	LUMP SUM	-	LUMP SUM	-	149.2	48.4
330489	9,701	-	LUMP SUM	33.5	-	-	0.2	2.7	128.6	LUMP SUM	-	LUMP SUM	-	131.0	39.4
330161	-	-	-	-	1368.0	2.2	11.6	4.0	157.4	-	-	-	-	-	-
330162	-	-	-	-	1368.0	-	2.5	-	157.4	-	-	-	-	-	-
330444	-	1726	LUMP SUM	-	4124.0	-	1.5	-	-	LUMP SUM	LUMP SUM	LUMP SUM	LUMP SUM	-	-
330448	-	-	-	-	969.7	-	3.6	5.0	284.4	-	-	-	-	-	-
330449	-	-	-	-	1042.4	-	0.6	13.5	284.4	-	-	-	-	-	-
330508	-	-	LUMP SUM	12.4	2769.0	-	-	-	112.0	LUMP SUM	-	LUMP SUM	-	-	-
330509	-	1410	LUMP SUM	-	5784.0	-	-	-	-	LUMP SUM	LUMP SUM	LUMP SUM	LUMP SUM	-	-
TOTAL	169,302	3,136	LUMP SUM	509.2	17,425.1	27.9	44.1	46.2	2,277.6	LUMP SUM	LUMP SUM	LUMP SUM	LUMP SUM	2,815.7	694.9

PROJECT NO. I-5795
FORSYTH COUNTY
 BRIDGE NO. 439, 441, 451, 452, 454,
458, 479, 480, 481, 482, 486, 487, 488,
489, 161, 162, 444, 448, 449, 508 & 509
 SHEET 4 OF 6

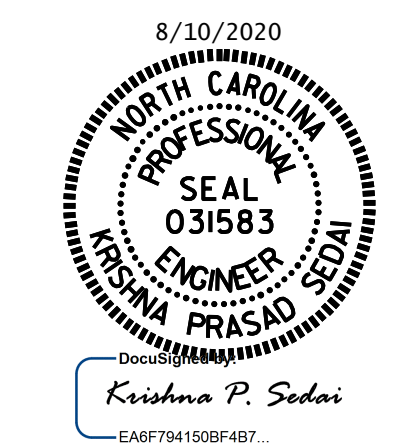

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

**TOTAL
 BILL OF MATERIALS**

DRAWN BY : A. SORSENGINH DATE : 1/2020
 CHECKED BY : H. A. LOCKLEAR DATE : 4/2020

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-4
1			3			TOTAL SHEETS
2			4			6

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED