


NOTES
 GENERAL DRAWING INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED 7/09/2019.
 BRIDGE ORIENTATION CONFORMS TO EXISTING BRIDGE PLANS / ROUTINE INSPECTION.



SCOPE OF WORK
 PARTIALLY REMOVE TOP OF BRIDGE DECK CONCRETE BY SCARIFICATION AND SHOTBLASTING METHODS.
 OVERLAY PREPARED TOP OF BRIDGE DECK WITH POLYESTER POLYMER CONCRETE (PPC).
 REMOVE EXISTING JOINT MATERIAL AND INSTALL POURABLE SILICONE JOINTS.
 GROOVE PPC BRIDGE DECK.
 CLEAN AND PAINT EXISTING WEATHERING STEEL BEAM ENDS.
 REMOVE DEBRIS FROM TOP OF EXISTING END BENT AND BENT CAPS, AND APPLY EPOXY COATING.
 REMOVE UNSOUND CONCRETE AND PROPERLY PREPARE EXISTING END BENT AND BENT AREAS FOR SHOTCRETE AND CONCRETE REPAIRS.
 PROPERLY PREPARE SPALLED AREAS IN EXISTING END BENT AND BENTS, AND PERFORM SHOTCRETE AND CONCRETE REPAIRS.
 CLEAN AND PAINT EXISTING STEEL BEARINGS.

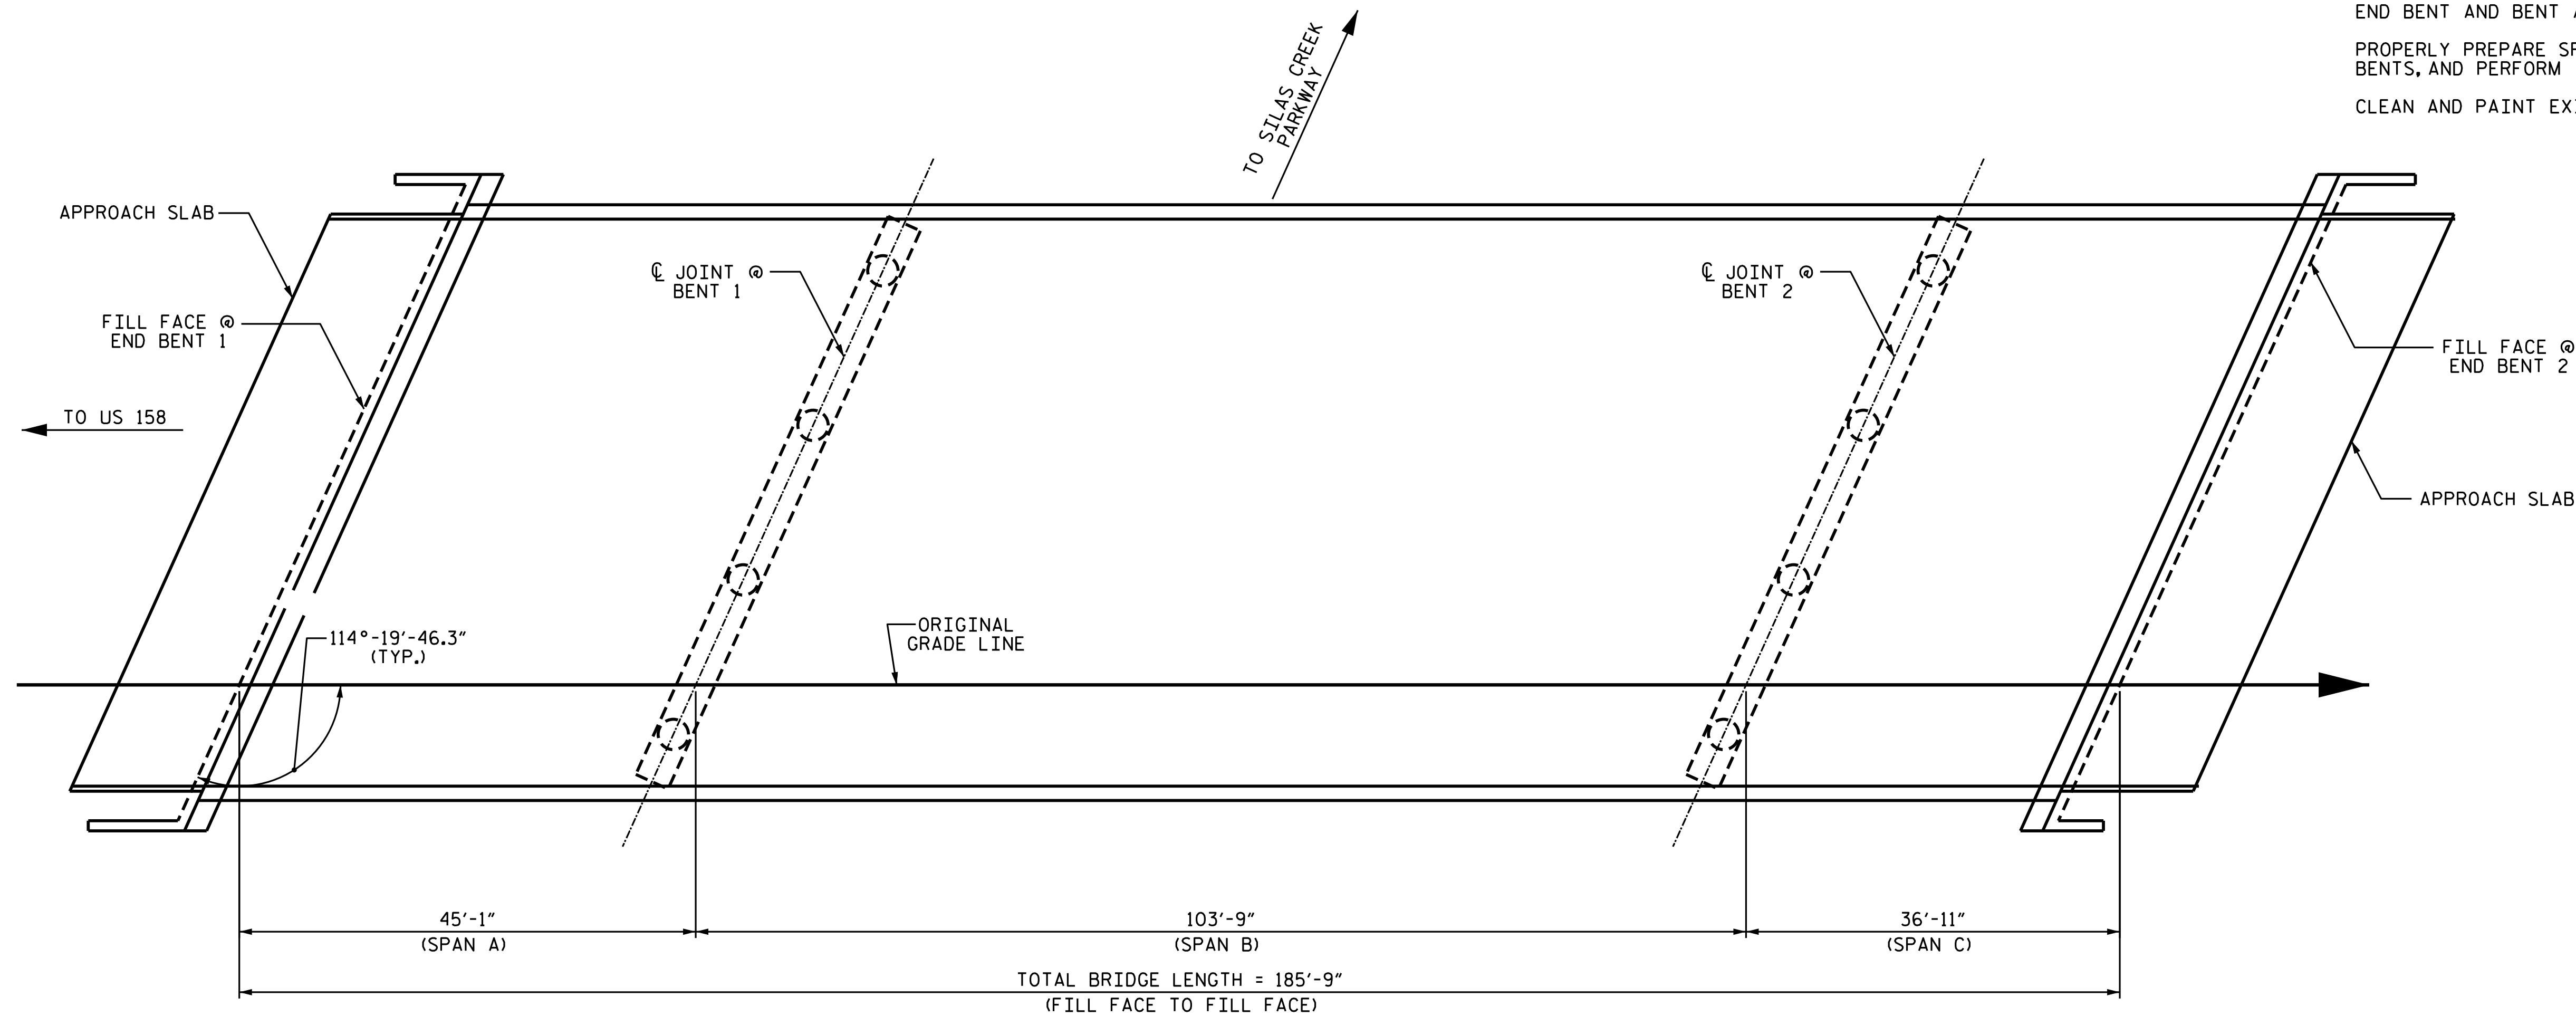

PROJECT NO. I-5795
FORSYTH COUNTY
 BRIDGE NO. 330452

I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED ACCORDING TO THESE PLANS OR AS NOTED HEREIN.

RESIDENT ENGINEER _____ DATE _____

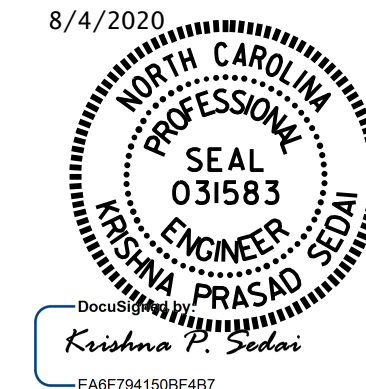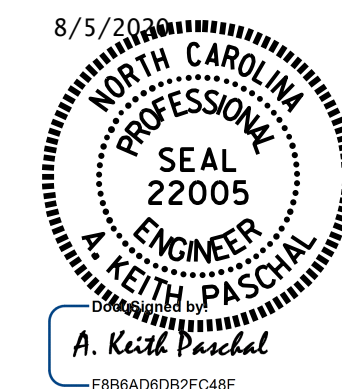

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

GENERAL DRAWING
 BRIDGE ON I-40 WBL
 OVER SR 3153
 (HANES MALL BLVD)

DRAWN BY : H.A. LOCKLEAR DATE : 8-14-19
 CHECKED BY : K. PUROHIT DATE : 3-2020

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S4-01
1			3			TOTAL SHEETS
2			4			4

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED