



NOTES:
 GENERAL DRAWING INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED 09/05/2018.
 BRIDGE ORIENTATION CONFORMS TO THE EXISTING BRIDGE PLANS / ROUTINE INSPECTION.

SCOPE OF WORK
 PARTIALLY REMOVE TOP OF BRIDGE DECK CONCRETE BY SCARIFICATION AND SHOTBLASTING METHODS.
 OVERLAY PREPARED TOP OF BRIDGE DECK WITH POLYESTER POLYMER CONCRETE (PPC).
 REMOVE EXISTING JOINT MATERIAL AND INSTALL POURABLE SILICONE JOINTS.
 GROOVE PPC BRIDGE DECK.
 REMOVE DEBRIS FROM TOP OF EXISTING END BENTS AND BENT CAPS, AND APPLY EPOXY COATING.
 CLEAN AND EPOXY COAT EXISTING PRESTRESSED CONCRETE GIRDER ENDS.


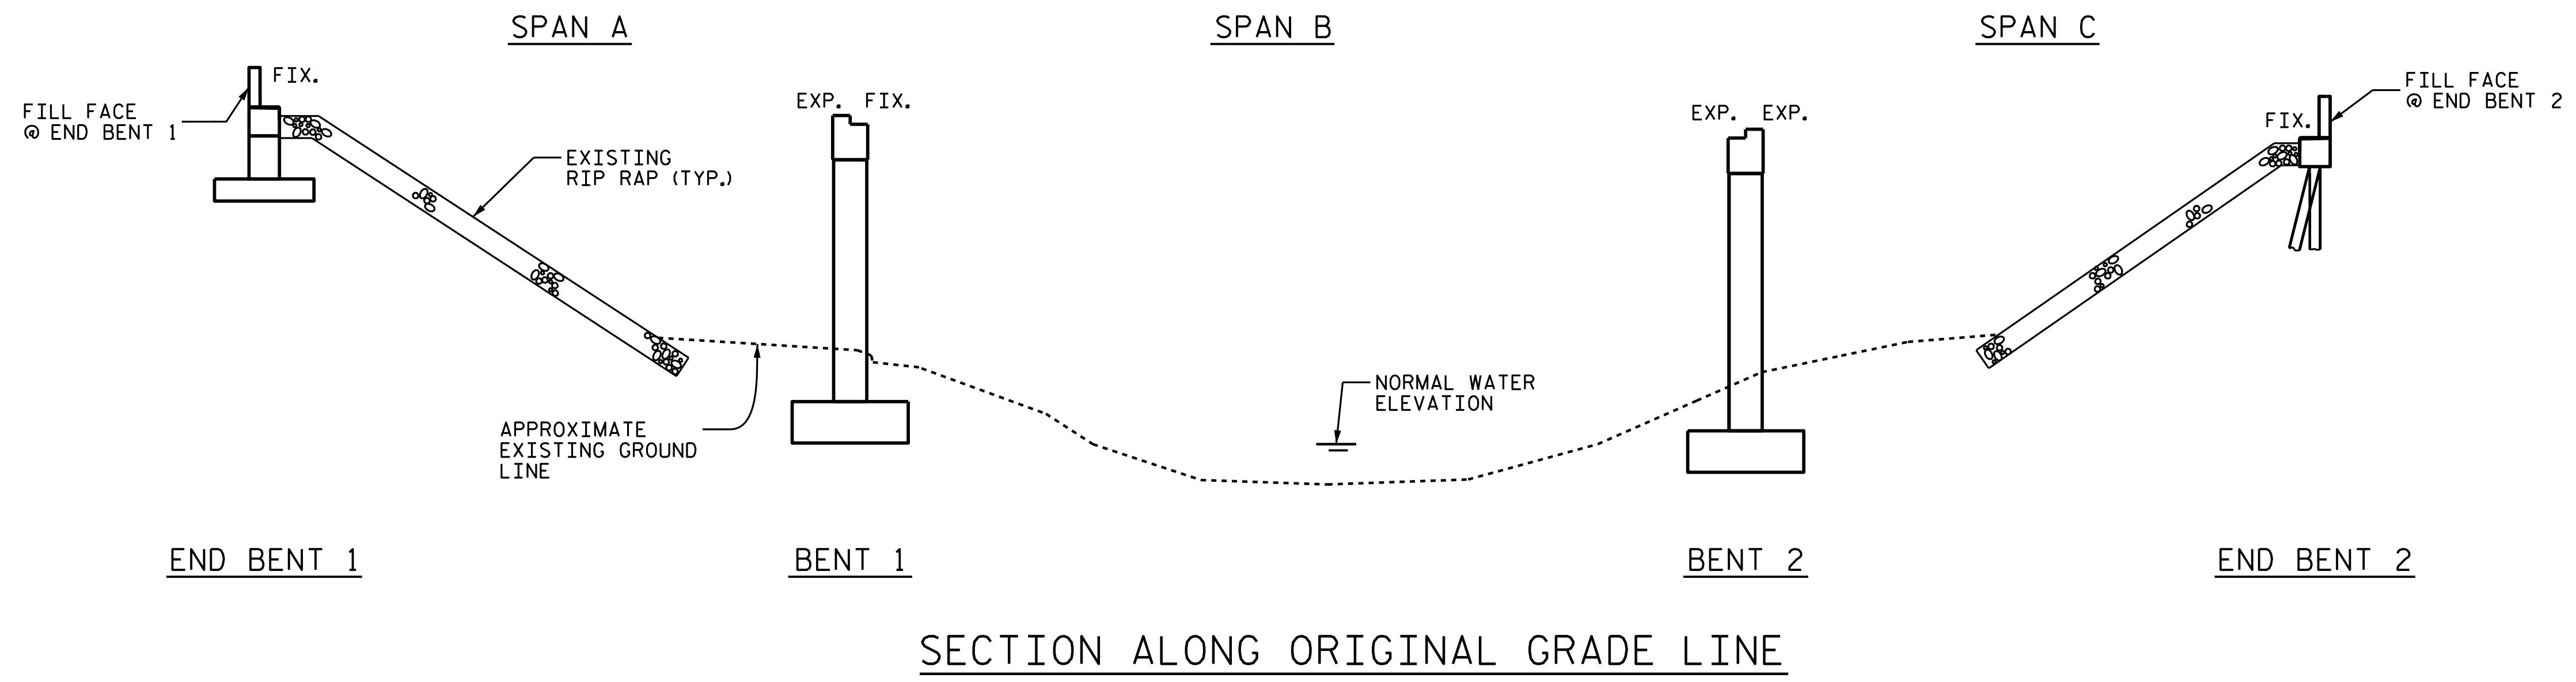


SECTION ALONG ORIGINAL GRADE LINE

I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED ACCORDING TO THESE PLANS OR AS NOTED HEREIN.
 RESIDENT ENGINEER _____ DATE _____

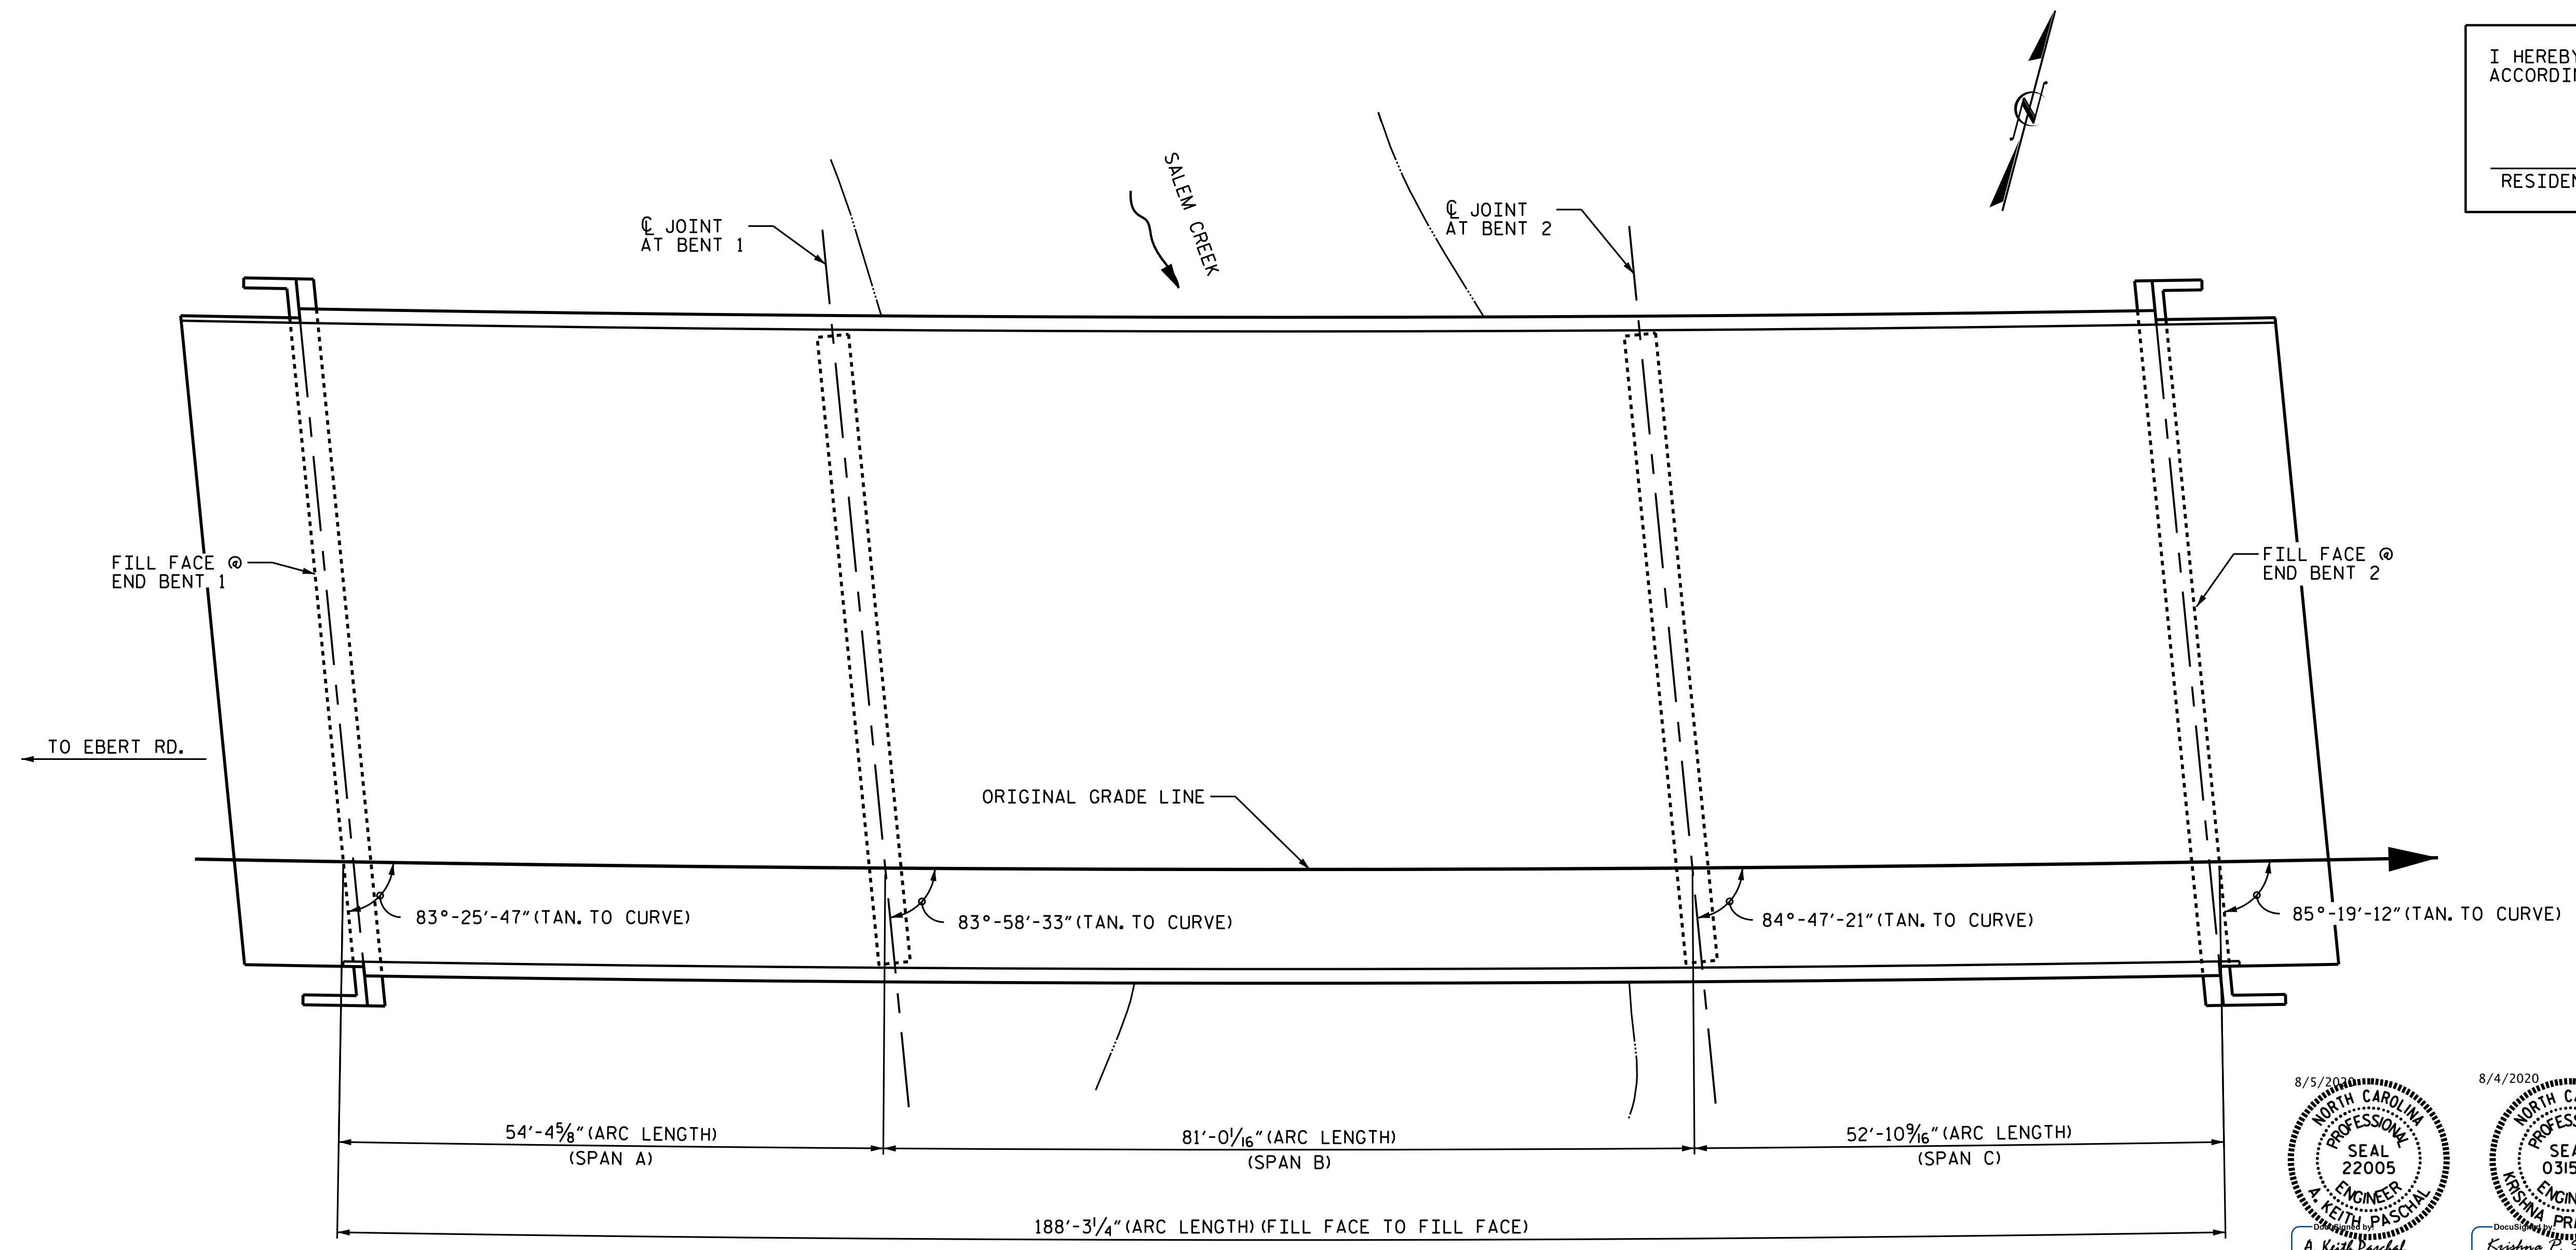

PLAN

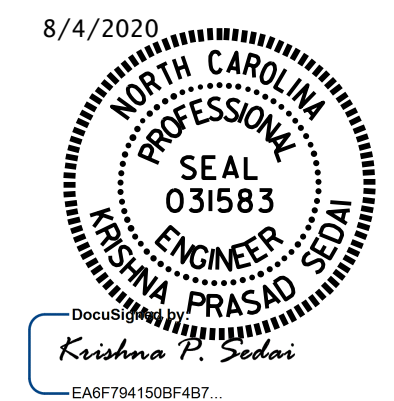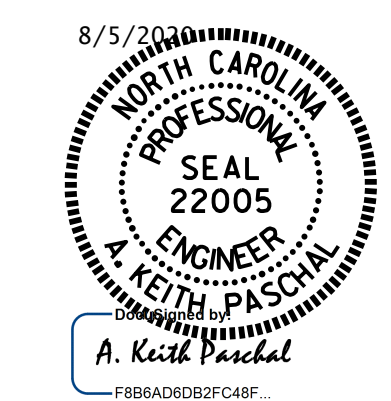

PROJECT NO. I-5795
 FORSYTH COUNTY
 BRIDGE NO. 330486

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH
GENERAL DRAWING
 FOR
 BRIDGE ON I-40(WBL)
 OVER SALEM CREEK

DRAWN BY : C. RUIZ DATE : 06/2019
 CHECKED BY : E. BAYISSA DATE : 01/2020

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S11-01
1			3			TOTAL SHEETS
2			4			4