NOTES

GENERAL DRAWING INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED 7/8/2019.

BRIDGE ORIENTATION CONFORMS TO THE EXISTING BRIDGE PLANS/ROUTINE INSPECTION.

I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED ACCORDING TO THESE PLANS OR AS NOTED HEREIN.

RESIDENT ENGINEER

DATE

SCOPE OF WORK

PARTIALLY REMOVE TOP OF BRIDGE DECK CONCRETE BY SCARIFICATION AND SHOTBLASTING METHODS.

APPLY DECK SEALANT TO PREPARED TOP OF BRIDGE DECK.

REMOVE EXISTING JOINT MATERIAL AND INSTALL FOAM JOINTS.

REMOVE UNSOUND CONCRETE AND PROPERLY PREPARE EXISTING END BENT AND BENT AREAS AND PERFORM SHOTCRETE AND/OR CONCRETE REPAIRS.

CLEAN AND EPOXY COAT EXISTING PRESTRESSED CONCRETE GIRDER ENDS.

REMOVE DEBRIS FROM TOP OF EXISTING END BENT AND BENT CAPS AND APPLY EPOXY COATING.

EPOXY RESIN INJECTION OF CONCRETE CRACKS.

PROJECT NO. I-5795 FORSYTH ___ COUNTY


330448 BRIDGE NO.____

SEAL O31583


STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION RALEIGH

> GENERAL DRAWING FOR BRIDGE ON I-40 EBL OVER WESTGATE DRIVE

REVISIONS SHEET NO NO. BY: DATE: S18-01 DATE: DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

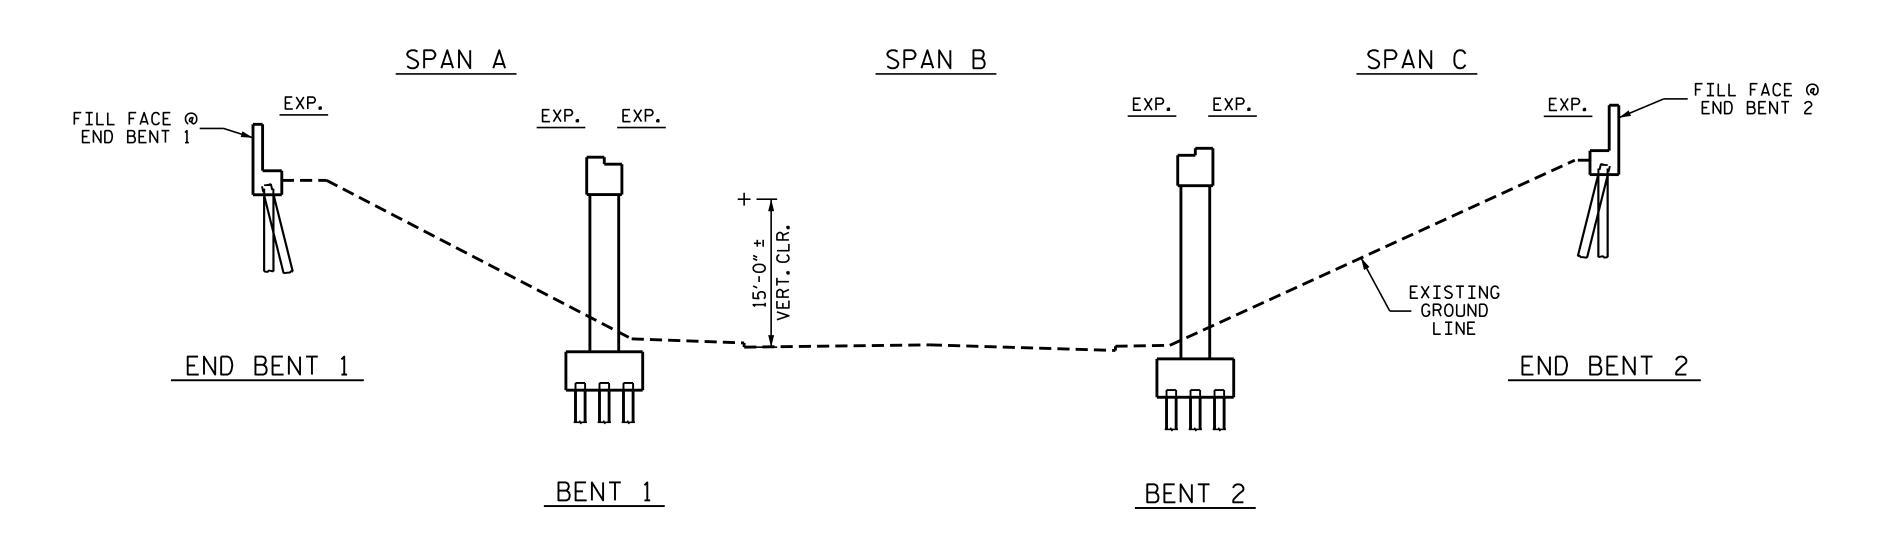

SECTION ALONG & ROADWAY

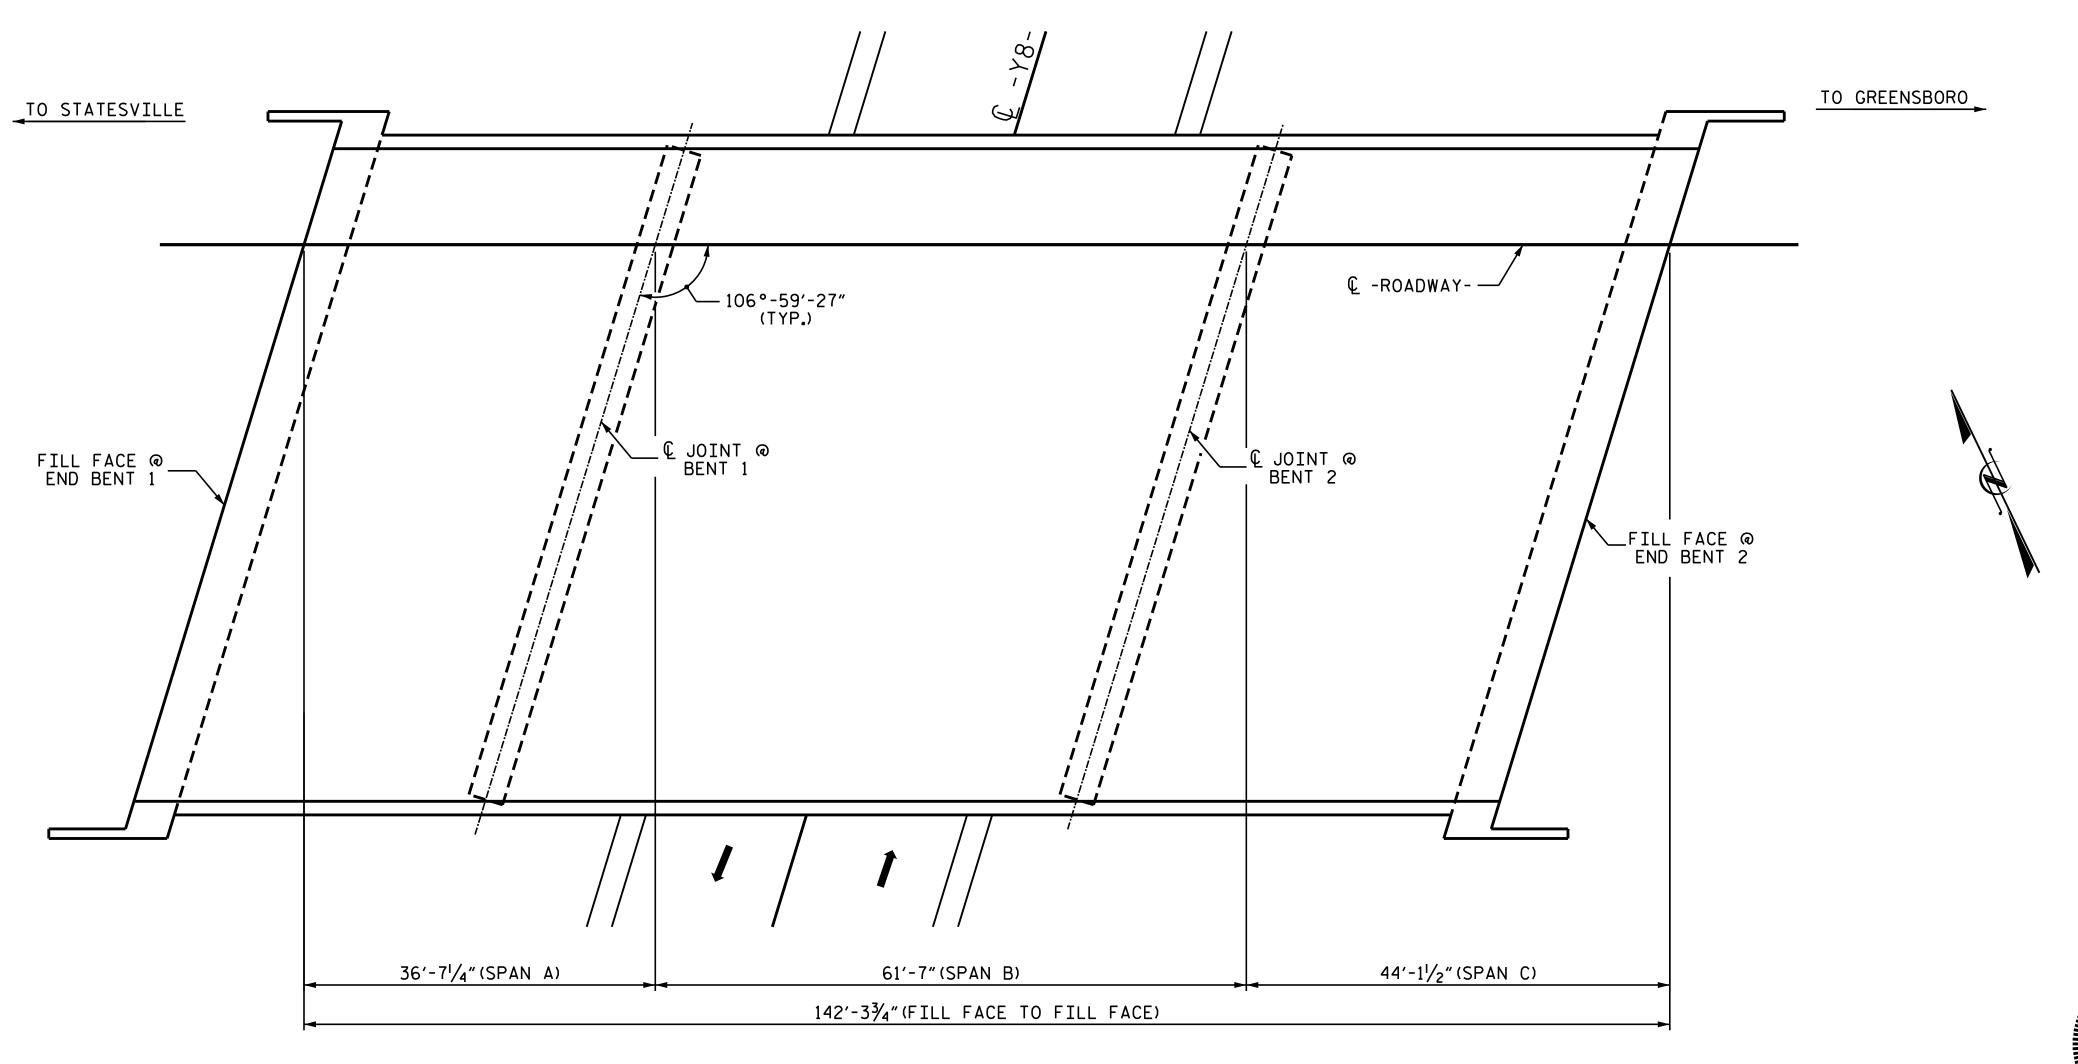

A. SORSENGINH __ DATE : <u>3/2018</u> DRAWN BY : M.G.SHAIKH _ DATE : <u>6/2018</u> CHECKED BY :