

**TYPICAL SECTION NO. 4**

MAP NO. 3  
SR 1809 (EDMUND BRINSON RD.)  
MP 0.00 - MP 1.67

MAP NO. 7  
SR 1004 (RONES CHAPEL RD.)  
MP 13.73 - MP 15.96  
MP 16.12 - MP 16.20

MAP NO. 10  
SR 1953 (PASTURE BRANCH RD.)  
MP 1.47 - MP 5.63

MAP NO. 13  
SR 1109 (BLANCHARD RD.)  
MP 0.00 - MP 0.28

MAP NO. 4  
SR 1715 (FOUNTAIN TOWN RD.)  
MP 6.79 - MP 10.13

MAP NO. 8  
SR 1975 (LIGHTHOUSE RD.)  
MP 0.94 - MP 2.52

MAP NO. 11  
SR 1006 (W TRADE RD.)  
MP 0.00 - MP 1.97


(VI) **NOTES:** MAP NO. 4 MILL 1½" FOR FLOODPLAIN FROM MP 6.90 - MP 7.20.

MAP NO. 9  
SR 1398 (AIRPORT RD.)  
MP 0.00 - MP 0.60

MAP NO. 12  
SR 1101 (CORNWALLIS RD.)  
MP 0.00 - MP 1.81  
NO ASPHALT WORK BRIDGE #23

MILL A SINGLE LANE AND PAVE BACK BY THE END OF EACH WORK DAY.

PAVEMENT SCHEDULE	
C2	1½" S9.5B
F1	AST-MAT COAT #67 (GRANITE) STONE
T	EARTH MATERIAL SHOULDER RECONST.
U	EXISTING PAVEMENT
V1	MILLING 1½" DEPTH

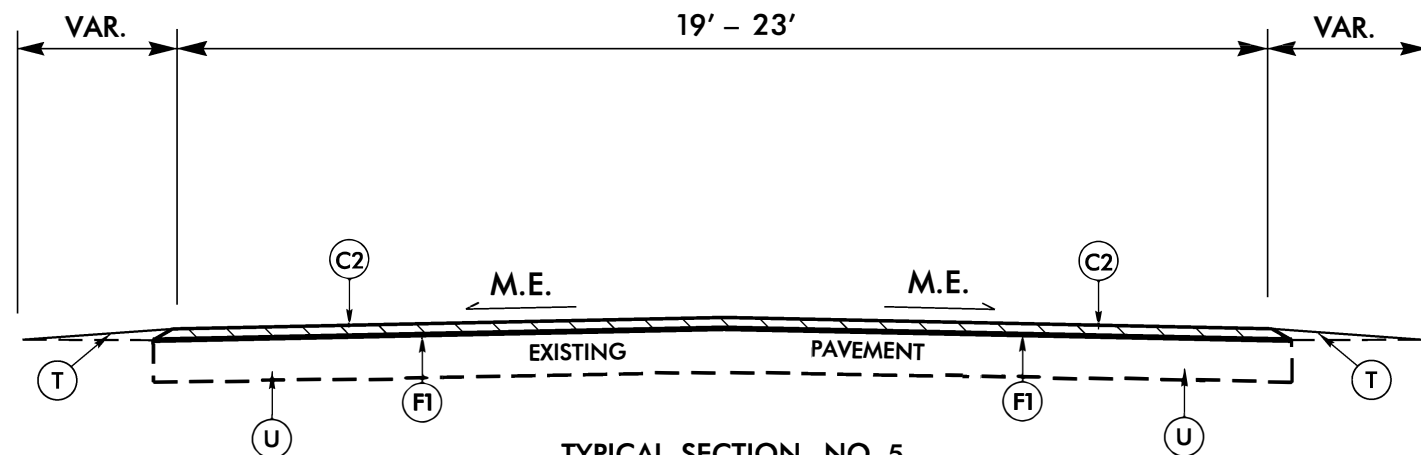

**TYPICAL SECTION NO. 5**

MAP NO. 5  
SR 1004 (SUMMERLINS CROSSROAD RD.)  
MP 0.00 - MP 3.60  
NO ASPHALT WORK BRIDGE #105

MAP NO. 6  
SR 1004 (SUMMERLINS CROSSROAD RD.)  
MP 5.16 - MP 9.45  
MP 9.46 - MP 11.80  
SEE ALSO TYPICAL NO. 6

MAP NO. 10  
SR 1953 (PASTURE BRANCH RD.)  
MP 0.37 - MP 1.47

(VI) **NOTES:** MAP NO. 5 MILL 1½" FOR FLOODPLAIN FROM MP 1.80 - MP 1.90.

MILL A SINGLE LANE AND PAVE BACK BY THE END OF EACH WORK DAY.

REVISIONS

8/17/99

25-SEP-2020 10:31 AM  
S:\Shared\NCR\2021 Resurfacing Trace & Bridge\Duplin\Typicals\Duplin - Typical.s.dgn