

2/17/2020 10:05:01 BR-0112 Traffic Signing and Delineation Pavement Markings Design Sheets BR-0112_PMP_01.dgn
 User: AHayes

CONTRACT: N/A T.I.P.: BR-0112

**STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION**

BRIDGE #320035

TIP NO. BR-0112	SHEET NO. PMP-01
APPROVED:	
DATE: 2/17/2020	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

**PAVEMENT MARKING PLAN
 EDGEcombe COUNTY**

INDEX

SHEET NO.	DESCRIPTION
PMP-01	PAVEMENT MARKING PLAN TITLE AND SCHEDULE SHEET
PMP-02	PAVEMENT MARKING DETAIL

GENERAL NOTES

- THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.
- A) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE AS FOLLOWS:

ROAD NAME	MARKING	MARKER
1) SR 1616	PAINT	NONE
 - B) PLACE TWO APPLICATIONS OF PAINT PAVEMENT MARKINGS ON THE FINAL WEARING SURFACE. PLACE THE SECOND APPLICATION OF PAINT UPON SUFFICIENT DRYING TIME OF THE FIRST.
 - C) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.
 - D) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.
 - E) PASSING ZONES WILL BE DETERMINED IN THE FIELD AND MUST BE APPROVED BY THE ENGINEER.
 - F) ALL STATIONS ARE CONSIDERED PLUS/MINUS (+/-).


FINAL PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM
P1	WHITE SOLID EDGE/LANE LINE	PAINT (4", 90 MILS)
P13	YELLOW DOUBLE CENTER	PAINT (4", 90 MILS)

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - TWO-LANE AND MULTILANE ROADWAYS
1205.12	PAVEMENT MARKINGS - BRIDGES
1250.01	RAISED PAVEMENT MARKERS - INSTALLATION SPACING
1251.01	RAISED PAVEMENT MARKERS - PERMANENT AND TEMPORARY
1261.01	GUARDRAIL AND BARRIER DELINEATORS - INSTALLATION SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATORS - TYPES AND MOUNTING
1262.01	GUARDRAIL END DELINEATION
1264.01	OBJECT MARKERS - TYPES
1264.02	OBJECT MARKERS - INSTALLATION

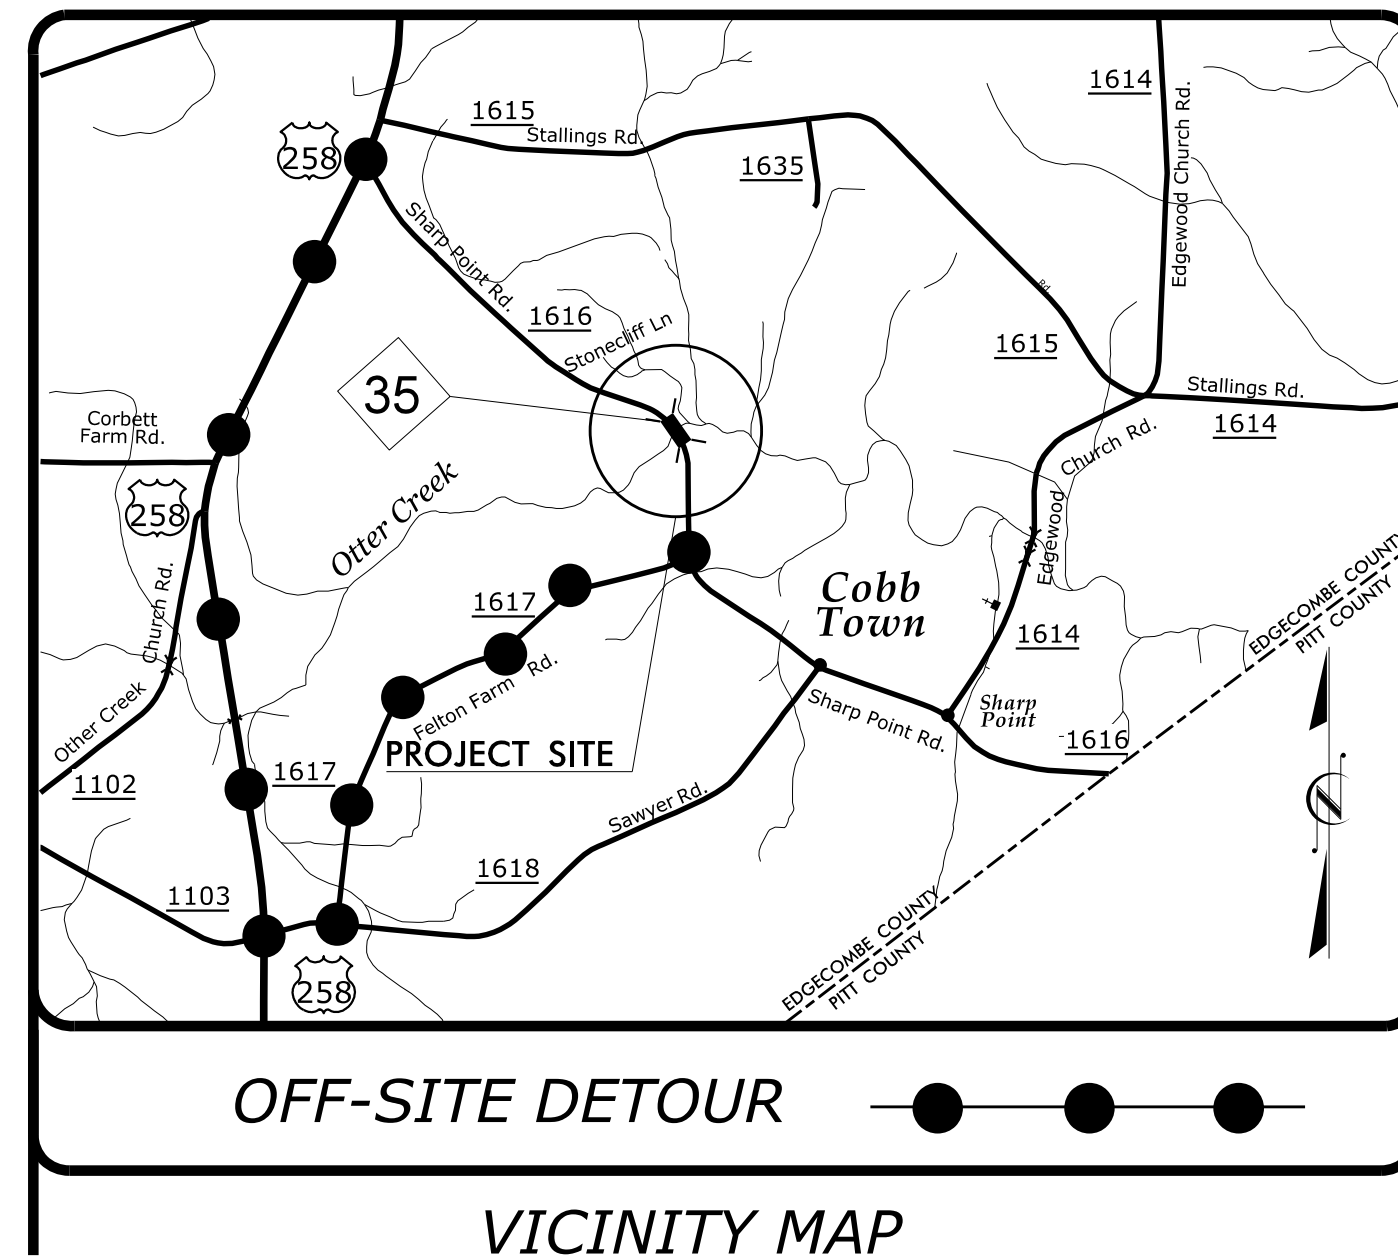


**LOCATION: BRIDGE NO. 320035 OVER OTTER CREEK
 ON SR 1616 (SHARP POINT RD.)**

TYPE OF WORK: GRADING, DRAINAGE, PAVING & STRUCTURE

PLAN SUBMITTED TO:

Ayman I. Alqudwah, PE, Signing and Delineation Regional Engineer

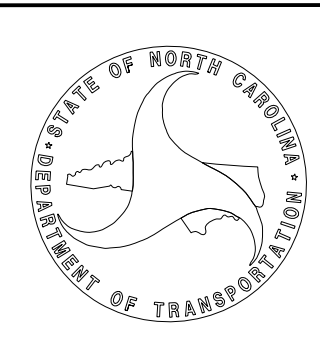

PLAN PREPARED BY: Wetherill Engineering, Inc.

NOSAKHERE WALCOTT, P.E. PROJECT MANAGER
D. ALLEN HAYES, E.I. TRANSPORTATION ENGINEER



TRANSPORTATION PLANNING/DESIGN - BRIDGE/STRUCTURE DESIGN
 CIVIL/SITE DESIGN - GIS/GPS - CONSTRUCTION OBSERVATION

1223 Jones Franklin Rd.
 Raleigh, N.C. 27605
 License No. F-9377
 Bus: 919 851 8077
 Fax: 919 851 8107