6/2/99

REVISIONS

I, ROBERT J. REIGNER, a Professional Land Surveyor in the state of North Carolina hereby certify to the best of my knowledge and belief that the following work item(s) (Base map Compilation, R/W Staking) performed under my responsible charge meet NCDOT Survey Standards as directed in the NCDOT Location & Surveys guidelines and procedures.

I further certify that the data compiled came from available surveys/mapping performed by others and provided to me by NCDOT and do not certify to the accuracy or quality of the individual data sources.

I further certify that the right of way and permanent easement points shown herein and outlined in the tables shown hereon (localized coordinates, station/offset) have been checked and are accurate representations of the right of way and permanent easement points depicted on the corresponding highway plans. I also certify that the right of way and permanent easement points shown herein have been field monumented under my supervision from existing survey control provided by others; that the depicted property data shown herein were surveyed by others; and these monuments denote the right of way and easement boundaries at the time of staking which may be subject to change due to right of way revisions (See deeds for final determination).

Witness my original signature, registration number and seal this 19th day of September, 2019.

DocuSigned by:
R.J. Reigner
D6C278535820460...

Professional Land Surveyor — L-4007 PLS # — Seal

PROJECT REFERENCE NO.	SHEET NO.
B-4484	RW04

Location and Surveys

DIVISION 2
LOCATION & SURVEYS

PROJECT SURVEYOR

NORTH CAROLINA PROFESSIONAL SEAL L-4007 LAND SURVEYOR ROBERT J. REIGNER

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

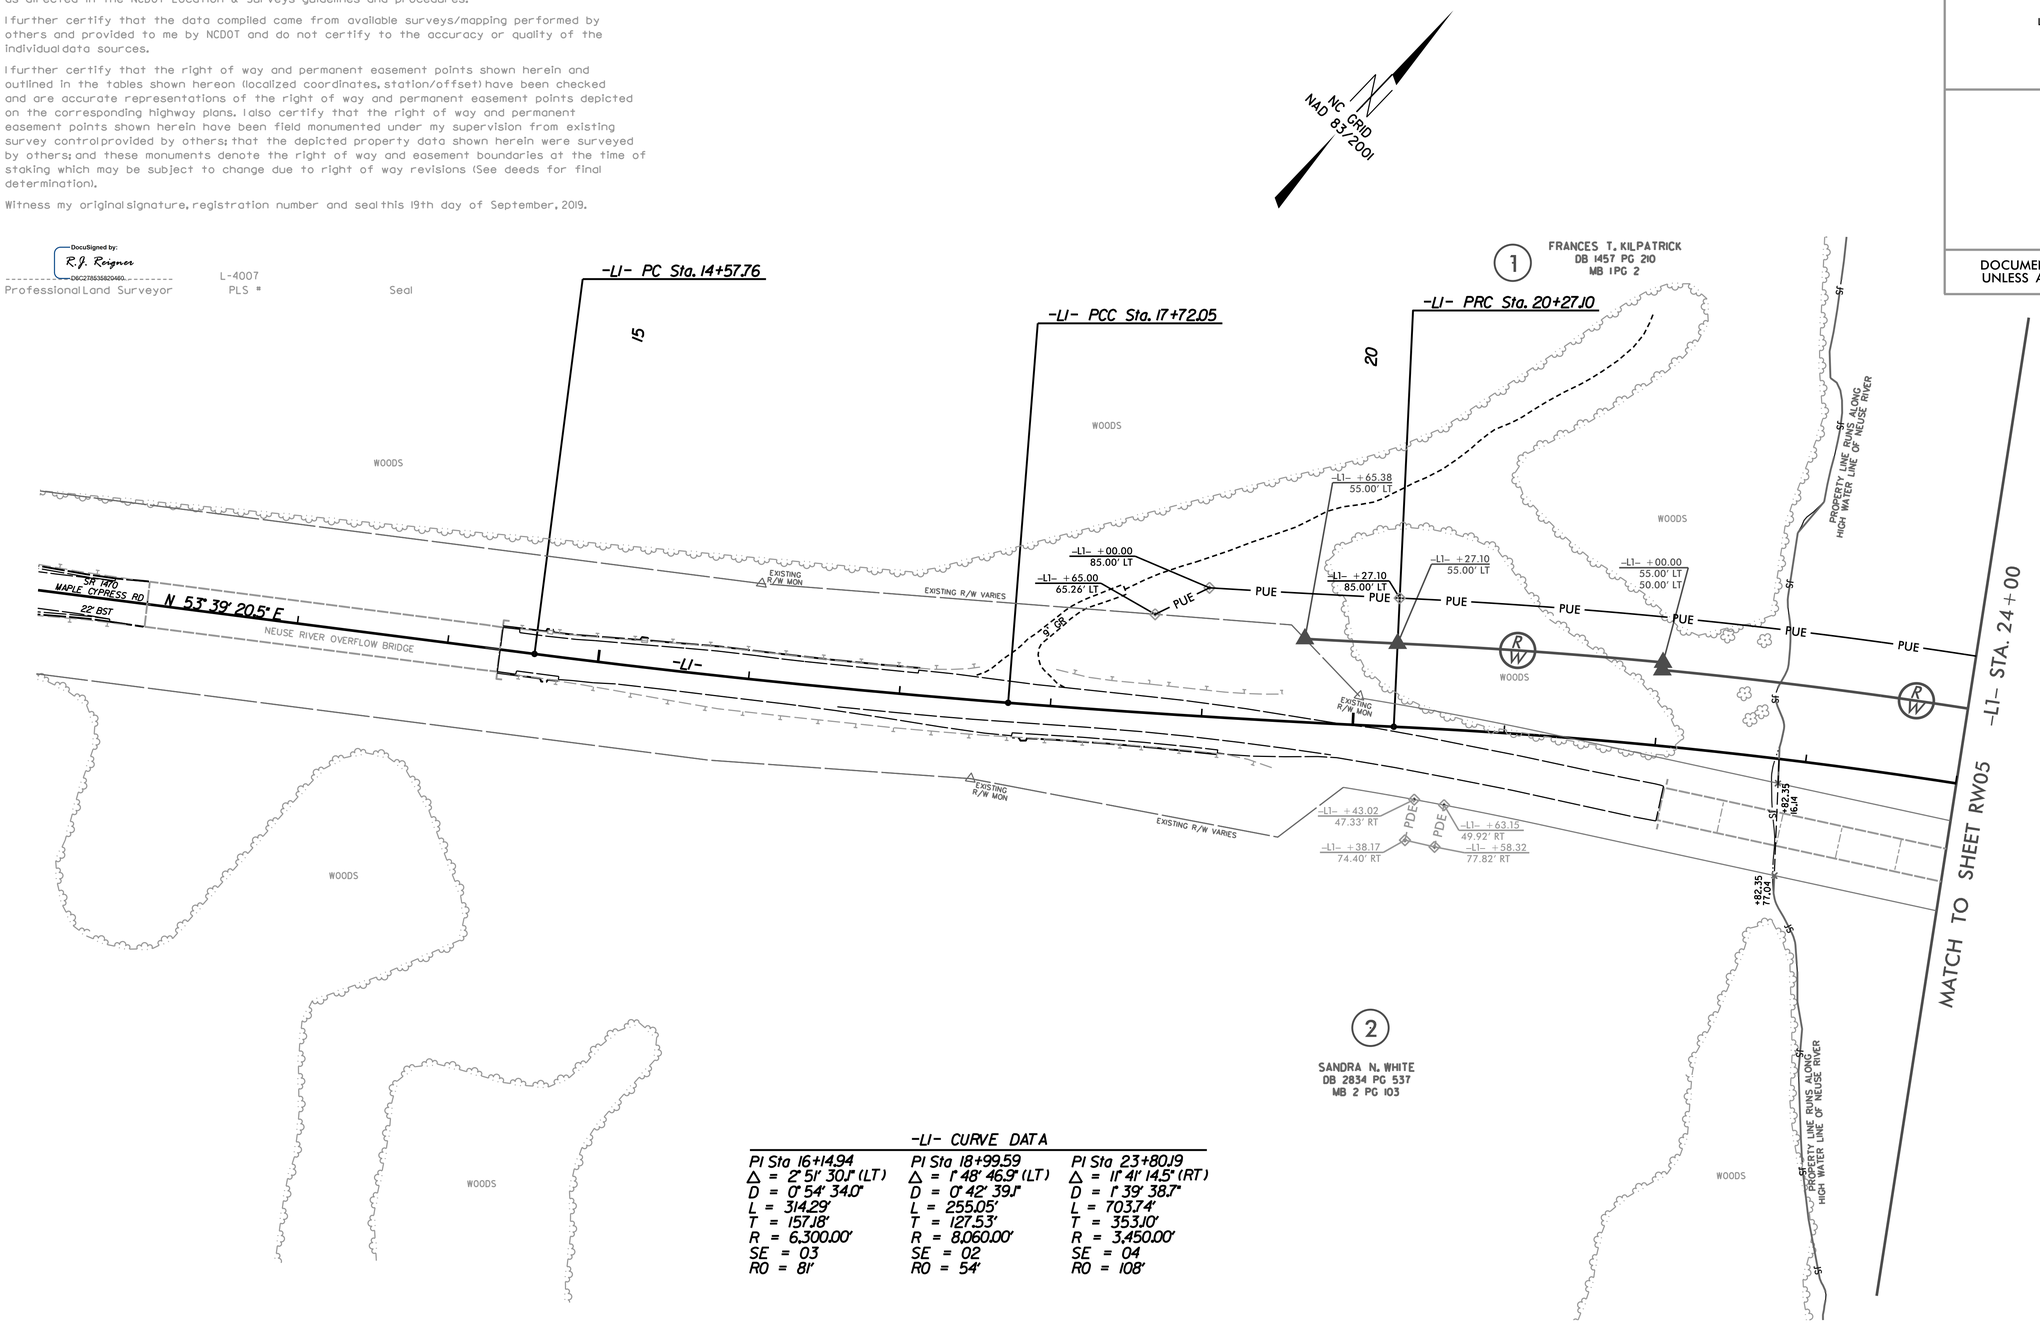

-L1- CURVE DATA

PI Sta 16+14.94	PI Sta 18+99.59	PI Sta 23+80.19
Δ = 2° 51' 30.1" (LT)	Δ = 1° 48' 46.9" (LT)	Δ = 11° 41' 14.5" (RT)
D = 0° 54' 34.0"	D = 0° 42' 39.1"	D = 1° 39' 38.7"
L = 314.29'	L = 255.05'	L = 703.74'
T = 157.18'	T = 127.53'	T = 353.10'
R = 6,300.00'	R = 8,060.00'	R = 3,450.00'
SE = 03	SE = 02	SE = 04
RO = 81'	RO = 54'	RO = 108'

NOTES:

1. IF FURTHER INFORMATION REGARDING PROJECT CONTROL IS NEEDED, PLEASE CONTACT THE LOCATION AND SURVEYS UNIT.

2. PROJECT CONTROL WAS ESTABLISHED USING GNSS, THE GLOBAL NAVIGATION SATELLITE SYSTEM.

$$$$SYSTIME$$$$
$$$$DGN$$$$
$$$$USERNAME$$$$