




2021CPT.08.05.10761 2021CPT.08.05.20761

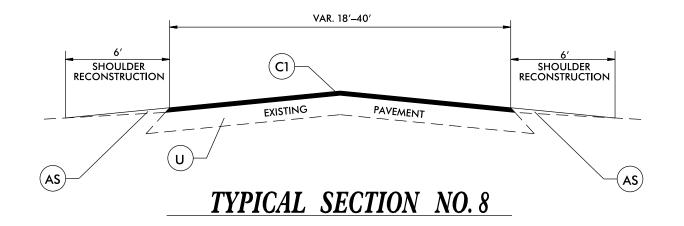

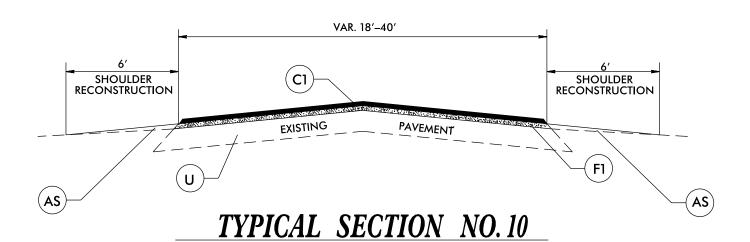

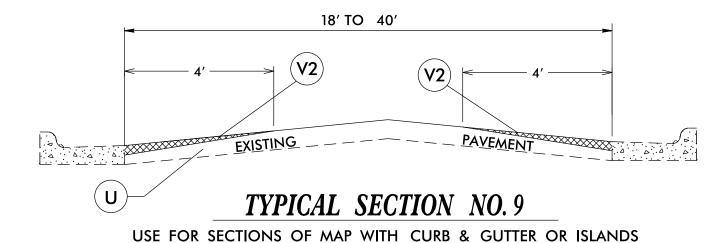

PAVEMENT SCHEDULE	
AS	AGGREGATE SHOULDER BORROW
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE \$9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
F1	PROPOSED ASPHALT SURFACE TREATMENT, MAT COAT WITH #67 STONE
U	EXISTING PAVEMENT.
V1	MILLING 1.5" IN DEPTH
V2	MILLING 0" TO 1.5" IN DEPTH
V3	MILLING 0" TO 3" IN DEPTH