




WBS ELEMENT SHEET NO.

4


2021CPT.08.08.20761

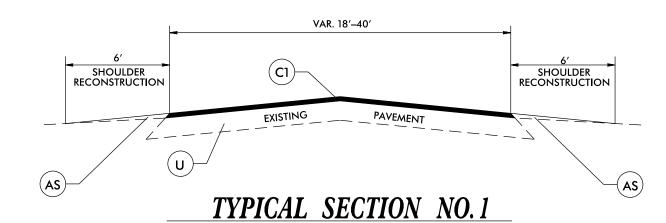

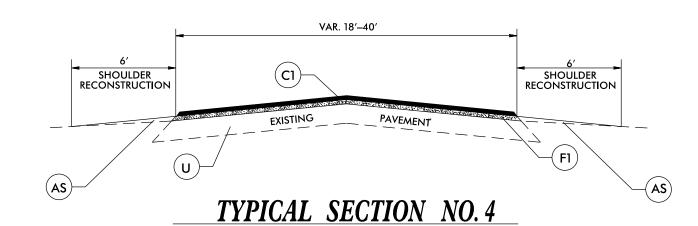

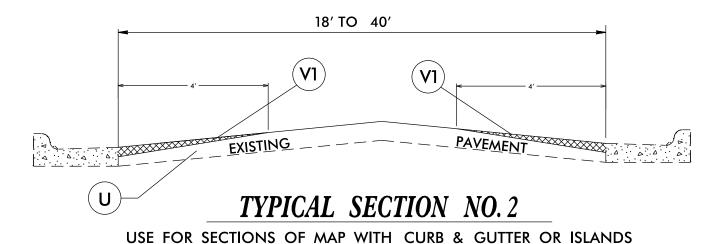

PAVEMENT SCHEDULE	
AS	AGGREGATE SHOULDER BORROW
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
F1	PROPOSED ASPHALT SURFACE TREATMENT, MAT COAT WITH #67 STONE
U	EXISTING PAVEMENT.
V1	4' MILL HEAD MILLING 0" TO 1.5" IN DEPTH

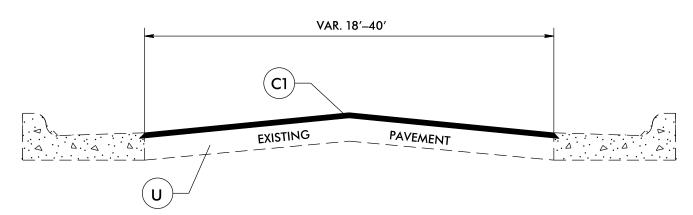

TYPICAL SECTION NO. 3