
DocuSign Envelope ID: 7B53F41E-E606-4A1D-A58E-896030B9BD4C

PROJECT REFERENCE NO. I-5711 SCP 8 40A52A 53 | 66 SEE NOTE 6 \bigcirc DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED SEAL

032179

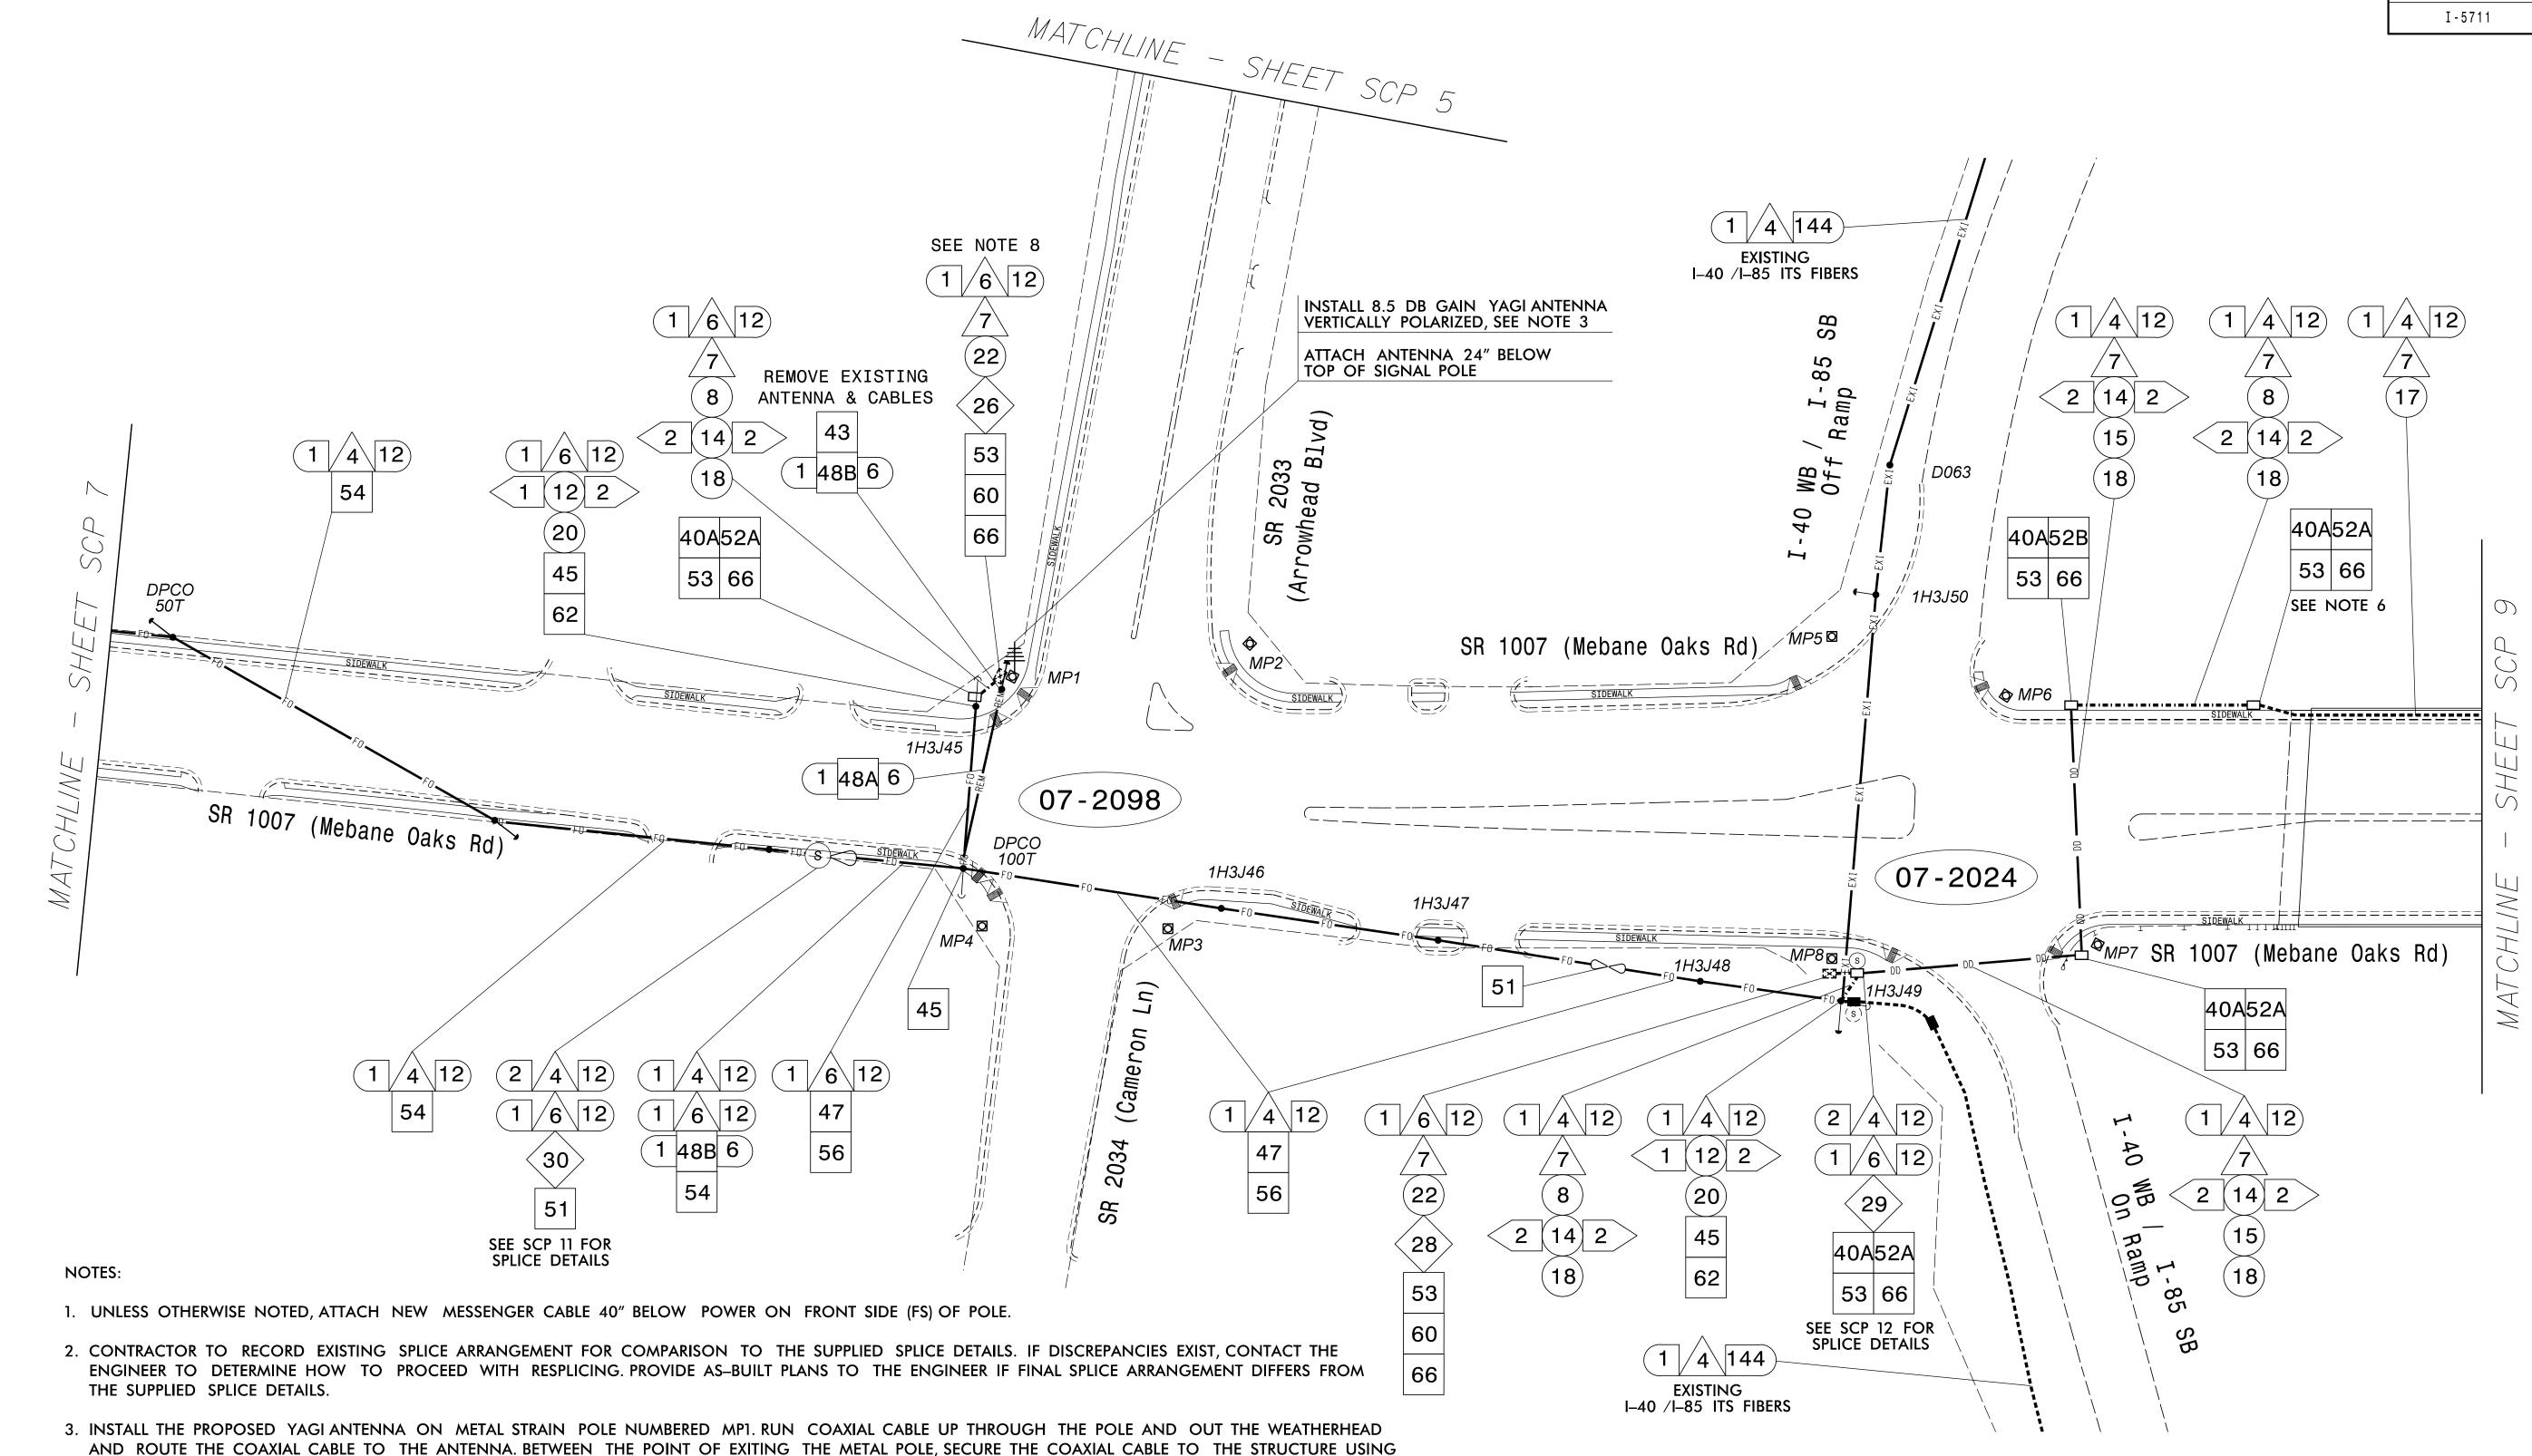

4. MAINTAIN PROPER CLEARANCE FROM ALL UTILITIES PER THE NATIONAL ELECTRICAL SAFETY CODE.

5. SEE 2018 NCDOT ROADWAY STANDARD DRAWINGS 1736.01 FOR WIRELESS RADIO ANTENNA TYPICAL DETAILS.

6. FIELD LOCATE EXISTING MULTI-CELL CONDUIT STUB-OUTS ON BOTH SIDES OF THE BRIDGE, AND INSTALL NEW JUNCTION BOXES.


3/4" STAINLESS STEEL STRAPS EVERY 12". REESTABLISH CONNECTION BETWEEN THE RADIO AND THE EXISTING SIGNAL SYSTEM NETWORK.

7. AFTER THE PROPOSED FIBER OPTIC SIGNAL COMMUNICATIONS SYSTEM IS INSTALLED, DISCONNECT THE EXISTING COMMUNICATIONS CABLES INSIDE THE SIGNAL CABINETS AT SIGNAL 07-0908 AND SIGNAL 07-2098, PROMPTLY SWITCH TO THE NEW FIBER AND REMOVE THE EXISTING 6-FIBER DROP CABLE FOR SIGNAL 07-2098 AS SHOWN. REMOVED THE EXISTING ANTENNAS AND CABLES FOR TEMPORARY SIGNALS NUMBERED 07-2024, 07-2025, 07-1349, AND 07-2060.

8. REUSE EXISTING FIELD ETHERNET SWITCH.

9. NOTIFY THE DEPUTY TRAFFIC ENGINEER MARK ALDRIDGE AT 336–487–0175 TWO (2) WEEKS PRIOR TO BEGINNING WORK ON SIGNAL SYSTEM COMMUNICATIONS CABLE. NOTIFY THE DEPUTY TRAFFIC ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.

PREPARED IN THE OFFICE OF: Accelerate Engineering, PLLC 875 Walnut Street, Suite 316 Cary, NC 27511 Tel: 919.263.5678 Fax: 919.263.5687 NC License No. P-1442

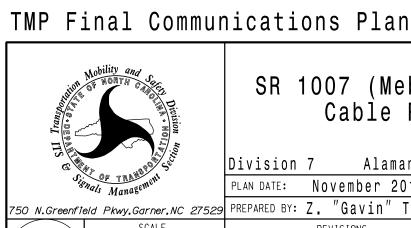

SR 1007 (Mebane Oaks Rd) CLS Cable Routing Plan

Division 7 Alamance County Mebane PLAN DATE: November 2019 REVIEWED BY: Z. "Gavin" Teng

750 N.Greenfield Pkwy, Garner, NC 27529 PREPARED BY: Z. "Gavin" Teng REVIEWED BY: REVISIONS INIT. DATE Eurolong ting 12/17/2019

6868400425254856... DATE CADD Filename: