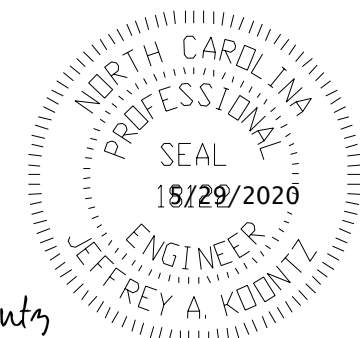


| | |
|--|------------------------|
| PROJECT REFERENCE NO. BR - 0042 | SHEET NO. SIGN - 01 |
| APPROVED: _____ | |
| DATE: _____ | |
| SEAL | |
|  | |
| Digitally signed by: <i>Jeffrey A. Koontz</i> DN: cn=Jeffrey A. Koontz, o=JEFFREY A. KOONTZ | |
| DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED | |

**STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION**

SIGNING PLAN

ROCKINGHAM COUNTY
 LOCATION: BRIDGE NO.780116 ON SR 2600
 (MIZPAH CHURCH RD) OVER US 29

T.I.P.: BR-0042

CONTRACT: C204392

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

| STD. NO. | TITLE |
|----------|--|
| 903.10 | GROUND MOUNTED SIGN SUPPORTS |
| 904.10 | ORIENTATION OF GROUND MOUNTED SIGNS |
| 904.50 | MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS |

GENERAL NOTES

- . ALL SIGNS SHALL BE FURNISHED BY THE CONTRACTOR.
- . ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.

SUMMARY OF QUANTITIES

| ITEM NO. | | ITEM DESCRIPTION | QUANTITY | UNIT |
|------------|-----------|------------------------------------|----------|------|
| DESC. NO. | SECT. NO. | | | |
| 4025000000 | 901 | CONTRACTOR FURNISHED, TYPE E SIGN | 119 | S.F. |
| 4072000000 | 903 | SUPPORTS, 3-LB STEEL U-CHANNEL | 320 | L.F. |
| 4102000000 | 904 | SIGN ERECTION, TYPE E | 14 | EA. |
| 4155000000 | 907 | DISPOSAL OF SIGN SYSTEM, U-CHANNEL | 9 | EA. |


PROJECT NOTES

1. DISPOSAL OF SIGN SYSTEM, U-CHANNEL

INDEX

| SHEET NO. | DESCRIPTION |
|-----------|------------------------|
| SIGN-1 | TITLE SHEET |
| SIGN-2 | TYPE "E" AND "F" SIGNS |
| SIGN-3-4 | SIGN PLAN SHEETS |


PLAN PREPARED BY:



JEFFREY KOONTZ, PE PROJECT ENGINEER
KASEY MCCOY PROJECT DESIGNER

APPROVED: _____
DATE: _____


SEAL

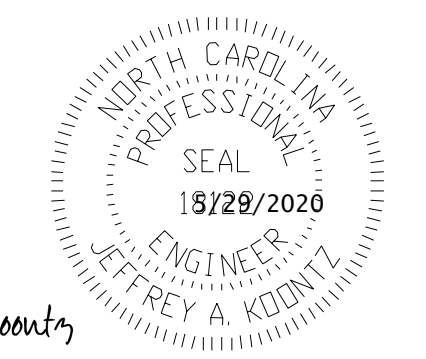

DocuSigned by:
Jeffrey A. Koontz
B4EBFECCD2B4F7


**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

401 QUANTITY REQ'D . 4

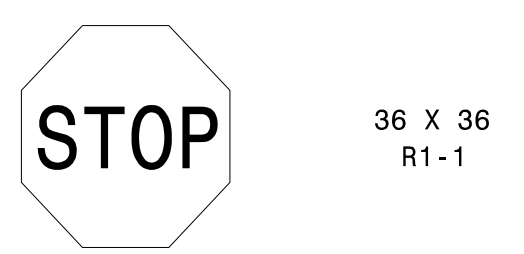


ONE "U" POST PER SIGN

406 QUANTITY REQ'D . 2

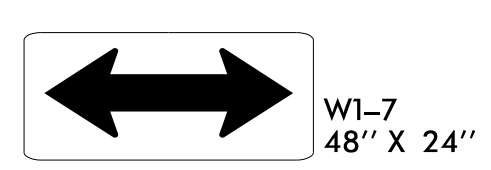


TWO "U" POST PER SIGN

402 QUANTITY REQ'D . 1

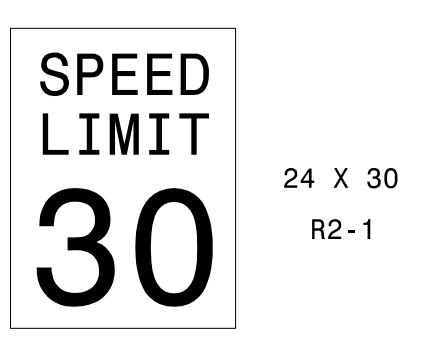


ONE "U" POST PER SIGN

407 QUANTITY REQ'D . 1

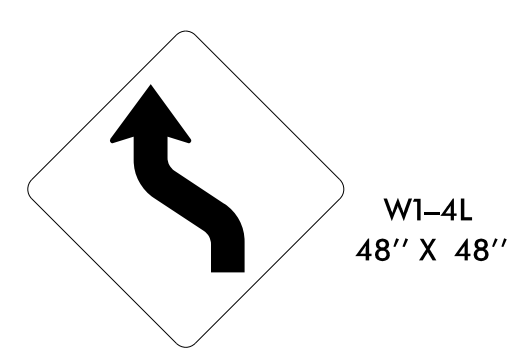


ONE "U" POST PER SIGN

403 QUANTITY REQ'D . 2

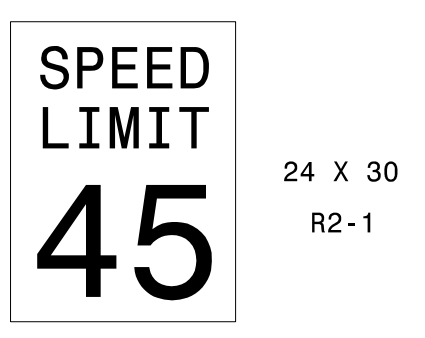


ONE "U" POST PER SIGN

408 QUANTITY REQ'D 1

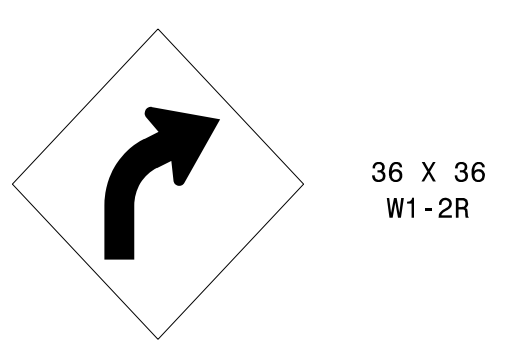


ONE "U" POST PER SIGN

404 QUANTITY REQ'D . 2

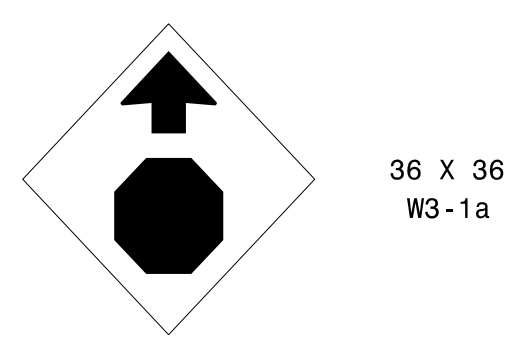

ONE "U" POST PER SIGN

405 QUANTITY REQ'D . 1

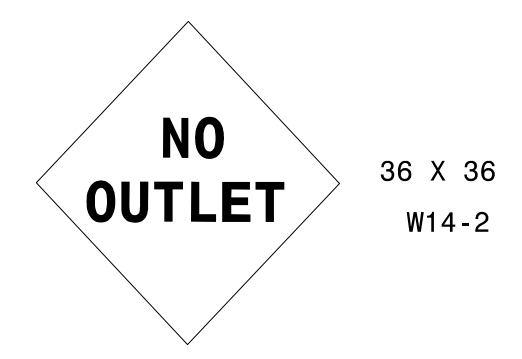


ONE "U" POST PER SIGN

TYPE "E" AND "F" SIGNS

12/16/2019 R:\Projects\TrafficControl\TCP\Signing\BR0042_Signing_PSH_02.dgn User: jkkoontz

| | |
|--|------------------------|
| PROJECT REFERENCE NO. BR - 0042 | SHEET NO. SIGN - 03 |
| APPROVED: _____ | |
| DATE: _____ | |
| SEAL | |
| | |
| DocuSigned by: <i>Jeffrey A. Koontz</i> <small>44EBFECC023847...</small> | |
| DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED | |

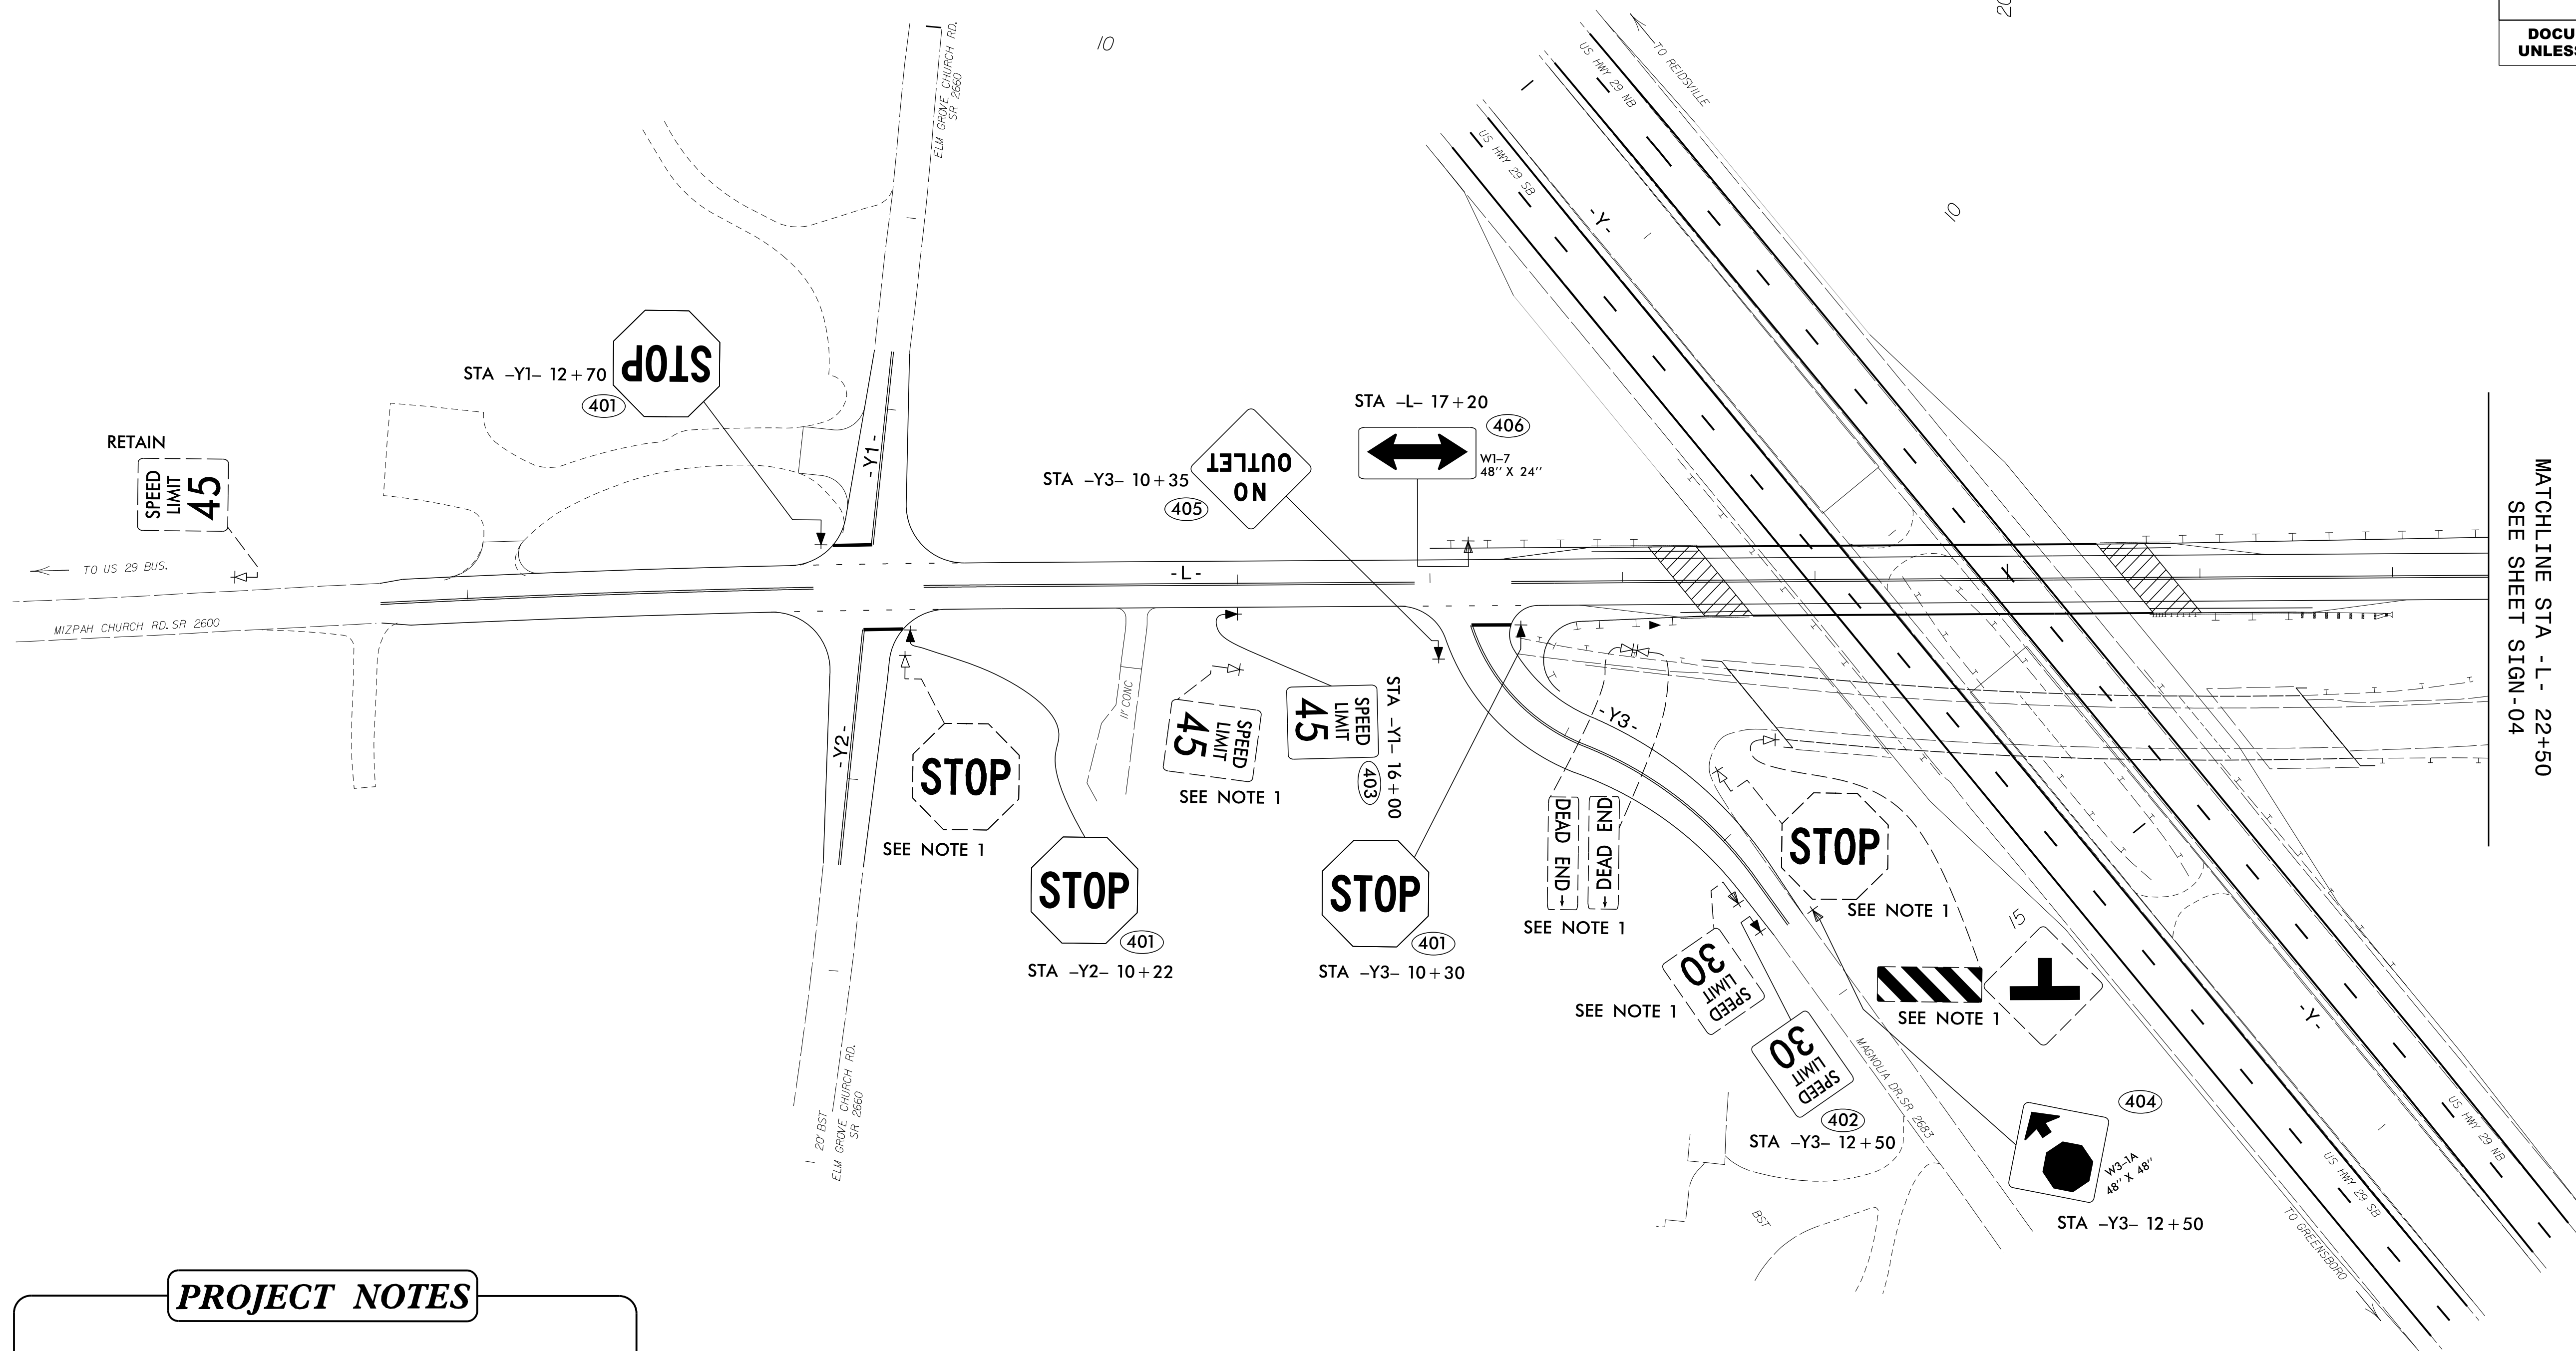



PROJECT NOTES

1. DISPOSAL OF SIGN SYSTEM, U-CHANNEL

**EXISTING AND PROPOSED
SIGNING
FROM -L- 10+00 TO 22+50**

12/16/2019
 R:\Traffic\Control\TICP\Signing\BR0042_Signing_PSH_Existing&Proposed_03.dgn
 User: Jeff Koontz

| | |
|--|----------------------|
| PROJECT REFERENCE NO. BR-0042 | SHEET NO. SIGN-04 |
| APPROVED: _____ | |
| DATE: _____ | |
| SEAL | |
| | |
| DocuSigned by: Jeffrey A. Koontz 34EBFECC2284F7... | |
| DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED | |

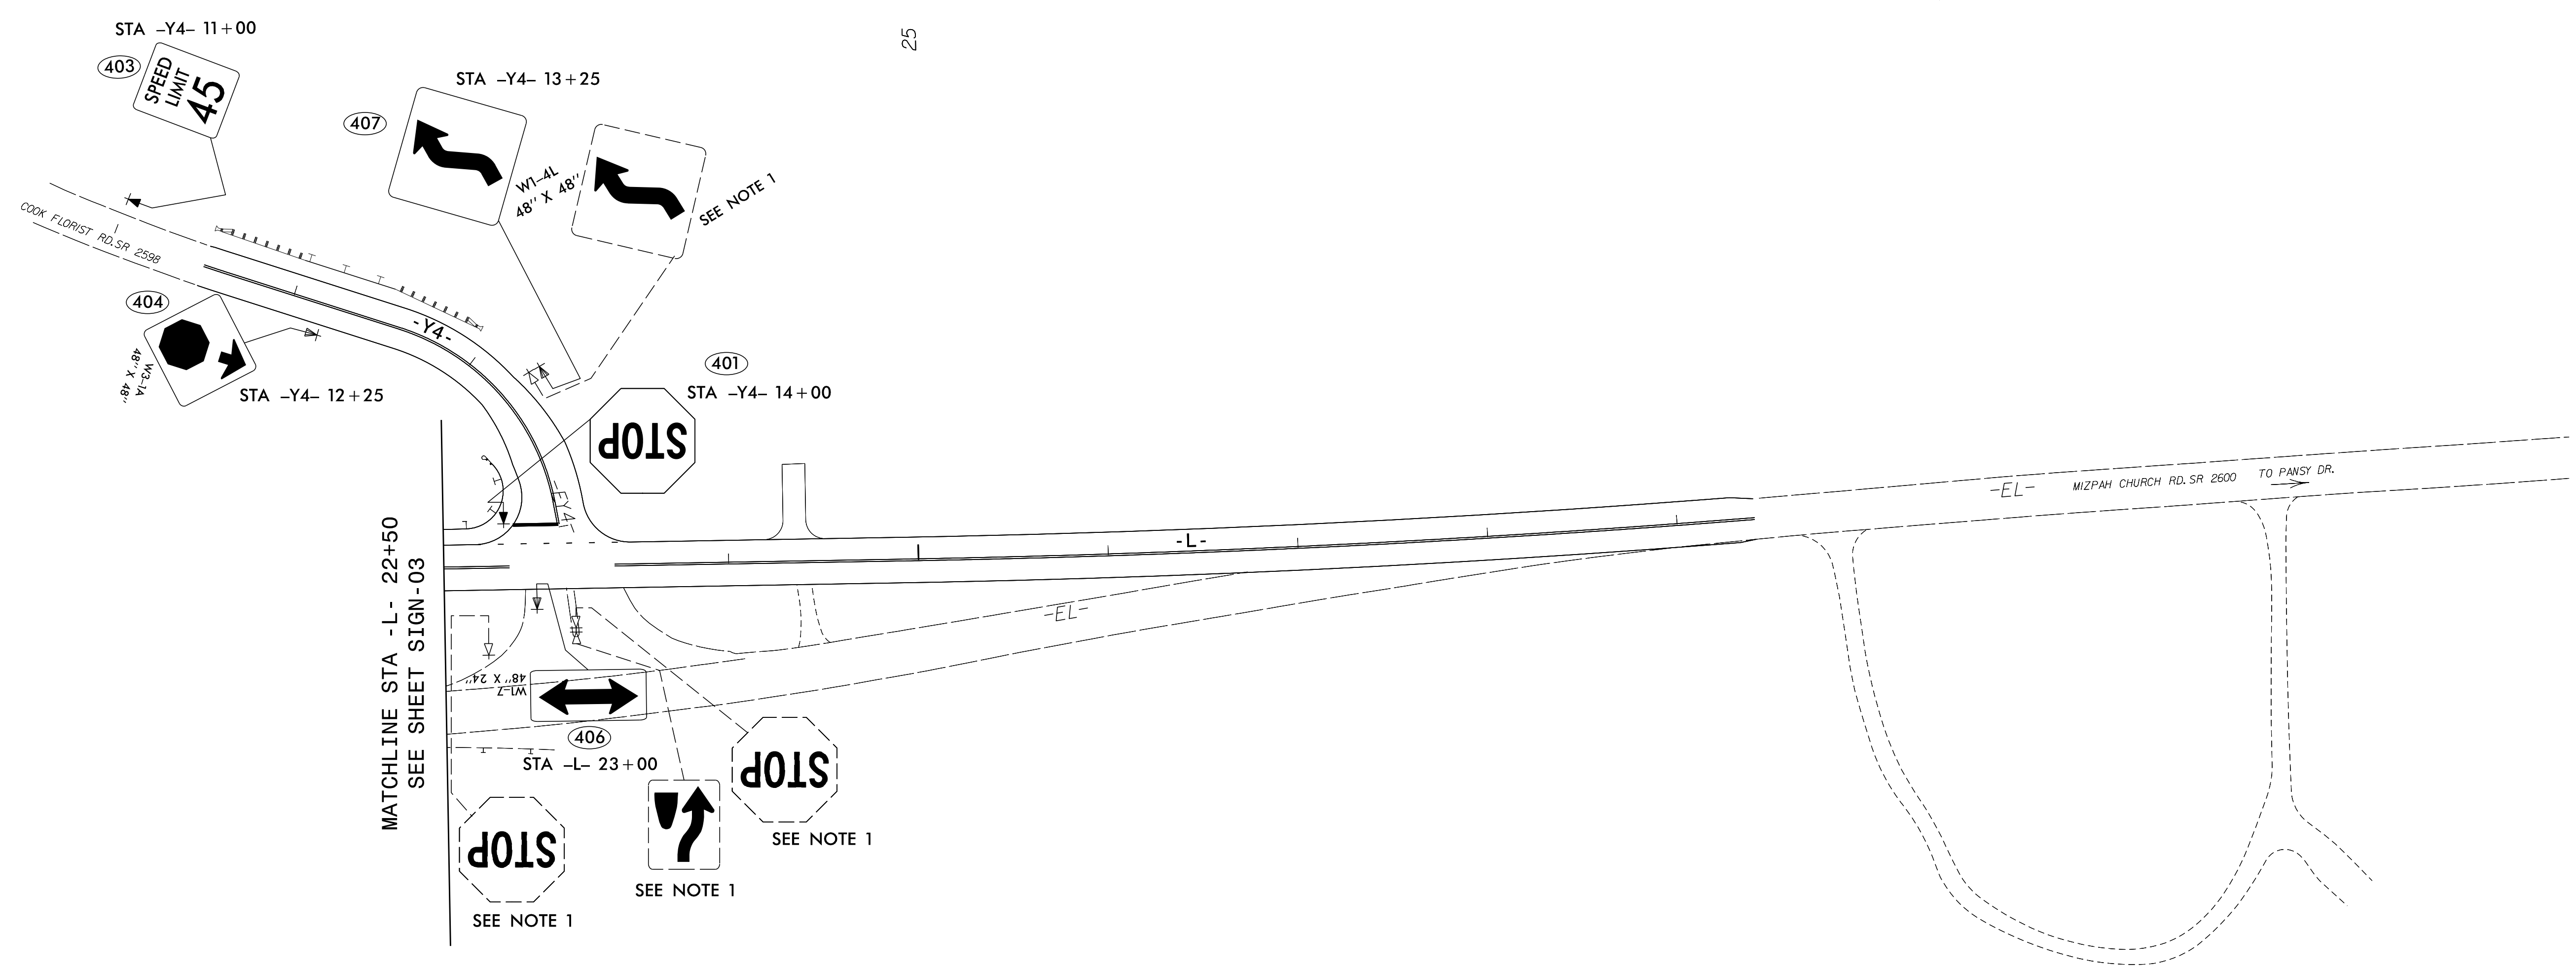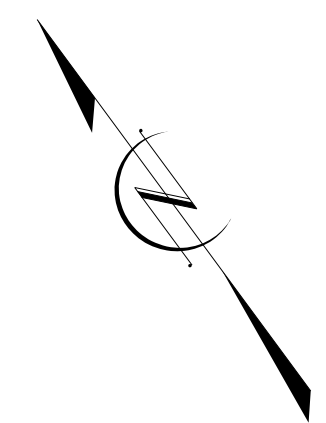

PROJECT NOTES

- 1. DISPOSAL OF SIGN SYSTEM, U-CHANNEL

**EXISTING AND PROPOSED
SIGNING
FROM -L- 22+50 TO 30+60**

12/16/2019 R:\Traffic\TrafficControl\TCP\Signing\BR0042_Signing_PSH_Existing&Proposed_04.dgn User: jef.koontz