

**STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS**


PROJ. REFERENCE NO.	SHEET NO.
BR-0011	X-1A

NOTE: EMBANKMENT COLUMN DOES NOT INCLUDE BACKFILL FOR UNDERCUT


CROSS-SECTION SUMMARY

						CROSS SECTION INDEX SHEET									
Station	Uncl. Exc.	Embt	Station	Uncl. Exc.	Embt	Chain	Beg Sta	End Sta	LOC	Sheet No.	Comments / Log File				
L	(cu. yd.)	(cu. yd.)	L (DETOUR REMOVAL)	(cu. yd.)	(cu. yd.)										
12+00.00	0	0	16+05.24	0	0	L	10+00.00	11+50.00		X-1	No Earthwork				
12+50.00	6	11	16+50.00	342	0	L	12+00.00	15+00.00		X-2 TO X-3	BR-0011_Phase 2_Mainline Construction.log				
13+00.00	9	48	17+00.00	322	0	L	16+00.00	20+00.00		X-4 TO X-6	BR-0011_Phase 2_Mainline Construction.log				
13+50.00	8	50	17+50.00	204	0	Y	1+25.00	1+50.00		X-7	BR-0011_Y.log				
14+00.00	2	78	18+00.00	109	8	L	13+50.00	15+00.00		X-2 TO X-3	BR-0011_Phase 1_Detour Construction.log				
14+50.00	5	107				L	16+00.00	18+00.00		X-4 TO X-5	BR-0011_Phase 1_Detour Construction.log				
15+00.00	13	118				L	13+50.00	15+00.00		X-2 TO X-3	BR-0011_Phase 3_Detour Removal.log				
15+10.00	4	31				L	16+00.00	18+00.00		X-4 TO X-5	BR-0011_Phase 3_Detour Removal.log				
Station	Uncl. Exc.	Embt													
L	(cu. yd.)	(cu. yd.)													
15+80.00	0	0													
16+00.00	7	81													
16+50.00	16	252													
17+00.00	16	209													
17+50.00	26	78													
18+00.00	32	28													
18+50.00	32	31													
19+00.00	27	38													
19+50.00	13	22													
20+00.00	4	6													
Station	Uncl. Exc.	Embt													
Y	(cu. yd.)	(cu. yd.)													
1+25.00	0	0													
1+50.00	1	31													
Station	Uncl. Exc.	Embt													
L (DETOUR)	(cu. yd.)	(cu. yd.)													
13+50.00	0	0													
14+00.00	2	441													
14+50.00	0	571													
15+00.00	0	443													
15+45.24	0	355													
Station	Uncl. Exc.	Embt													
L (DETOUR)	(cu. yd.)	(cu. yd.)													
16+05.24	0	0													
16+50.00	0	356													
17+00.00	0	355													
17+50.00	0	309													
18+00.00	0	208													
Station	Uncl. Exc.	Embt													
L (DETOUR REMOVAL)	(cu. yd.)	(cu. yd.)													
13+50.00	0	0													
14+00.00	330	7													
14+50.00	464	0													
15+00.00	404	0													
15+45.24	335	0													


Approximate quantities only. Unclassified excavation, borrow excavation, fine grading, clearing and grubbing, and removal of existing pavement will be paid for at the contract lump sum price for "Grading".

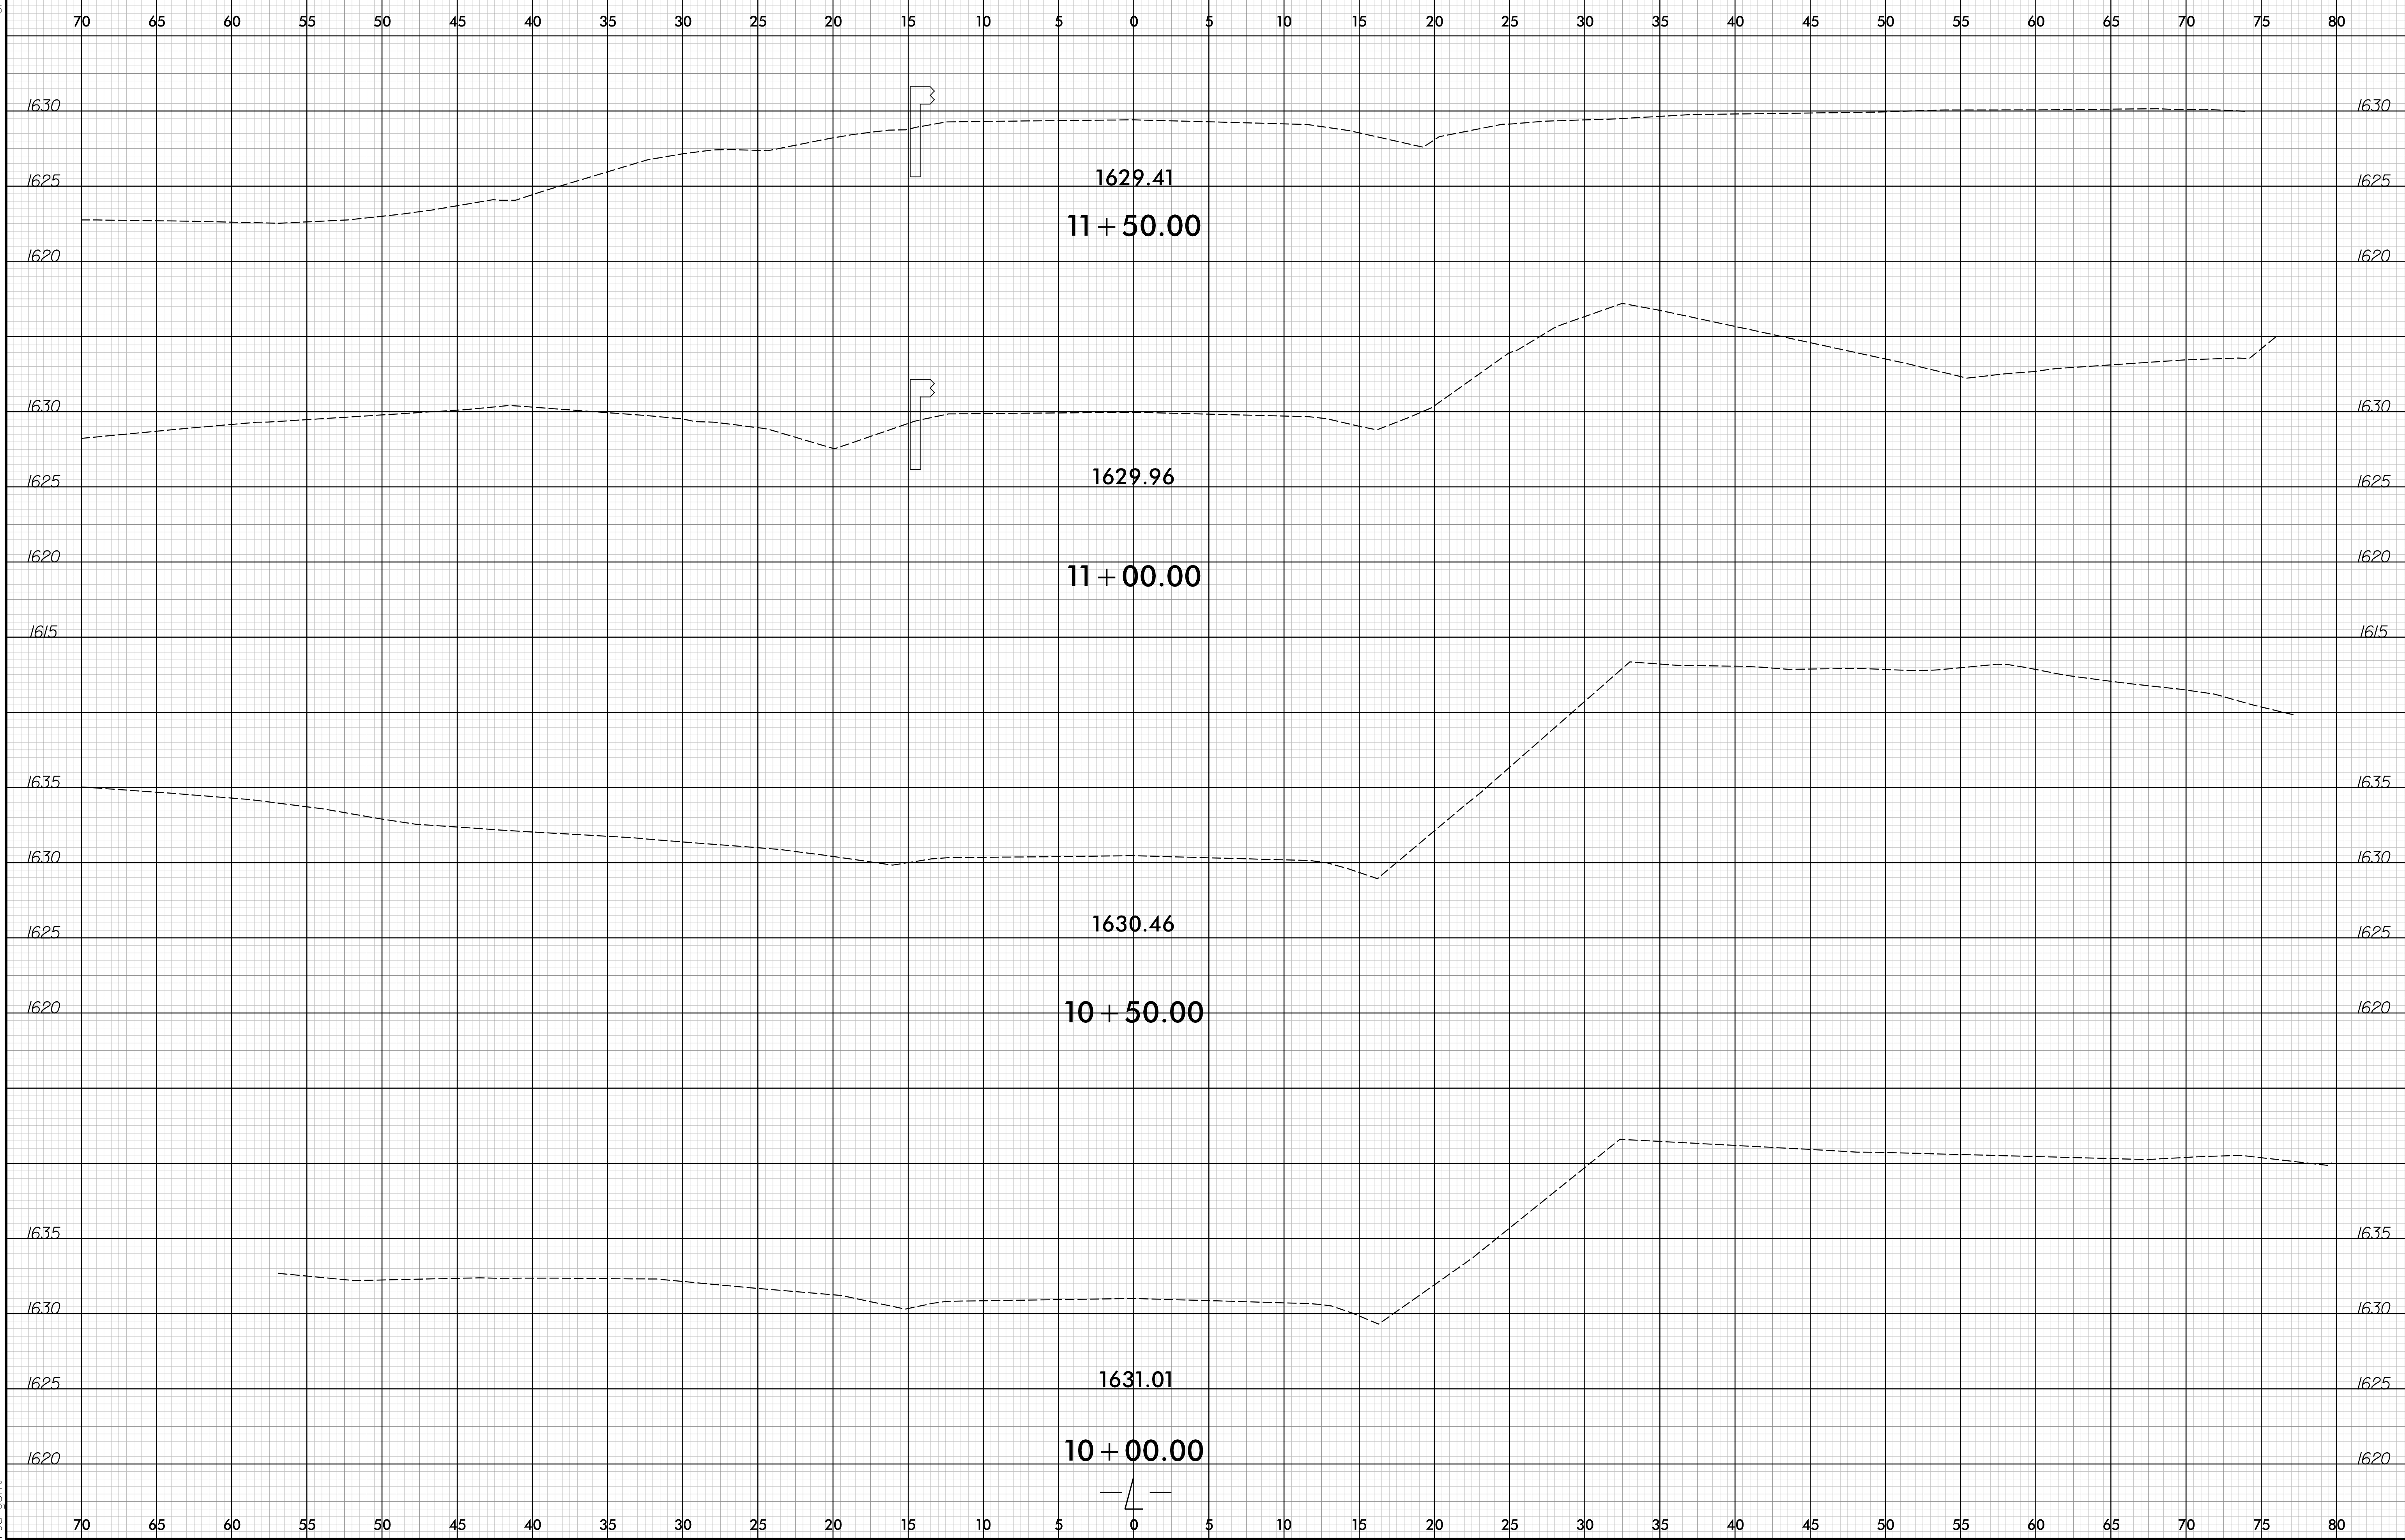

6/23/16

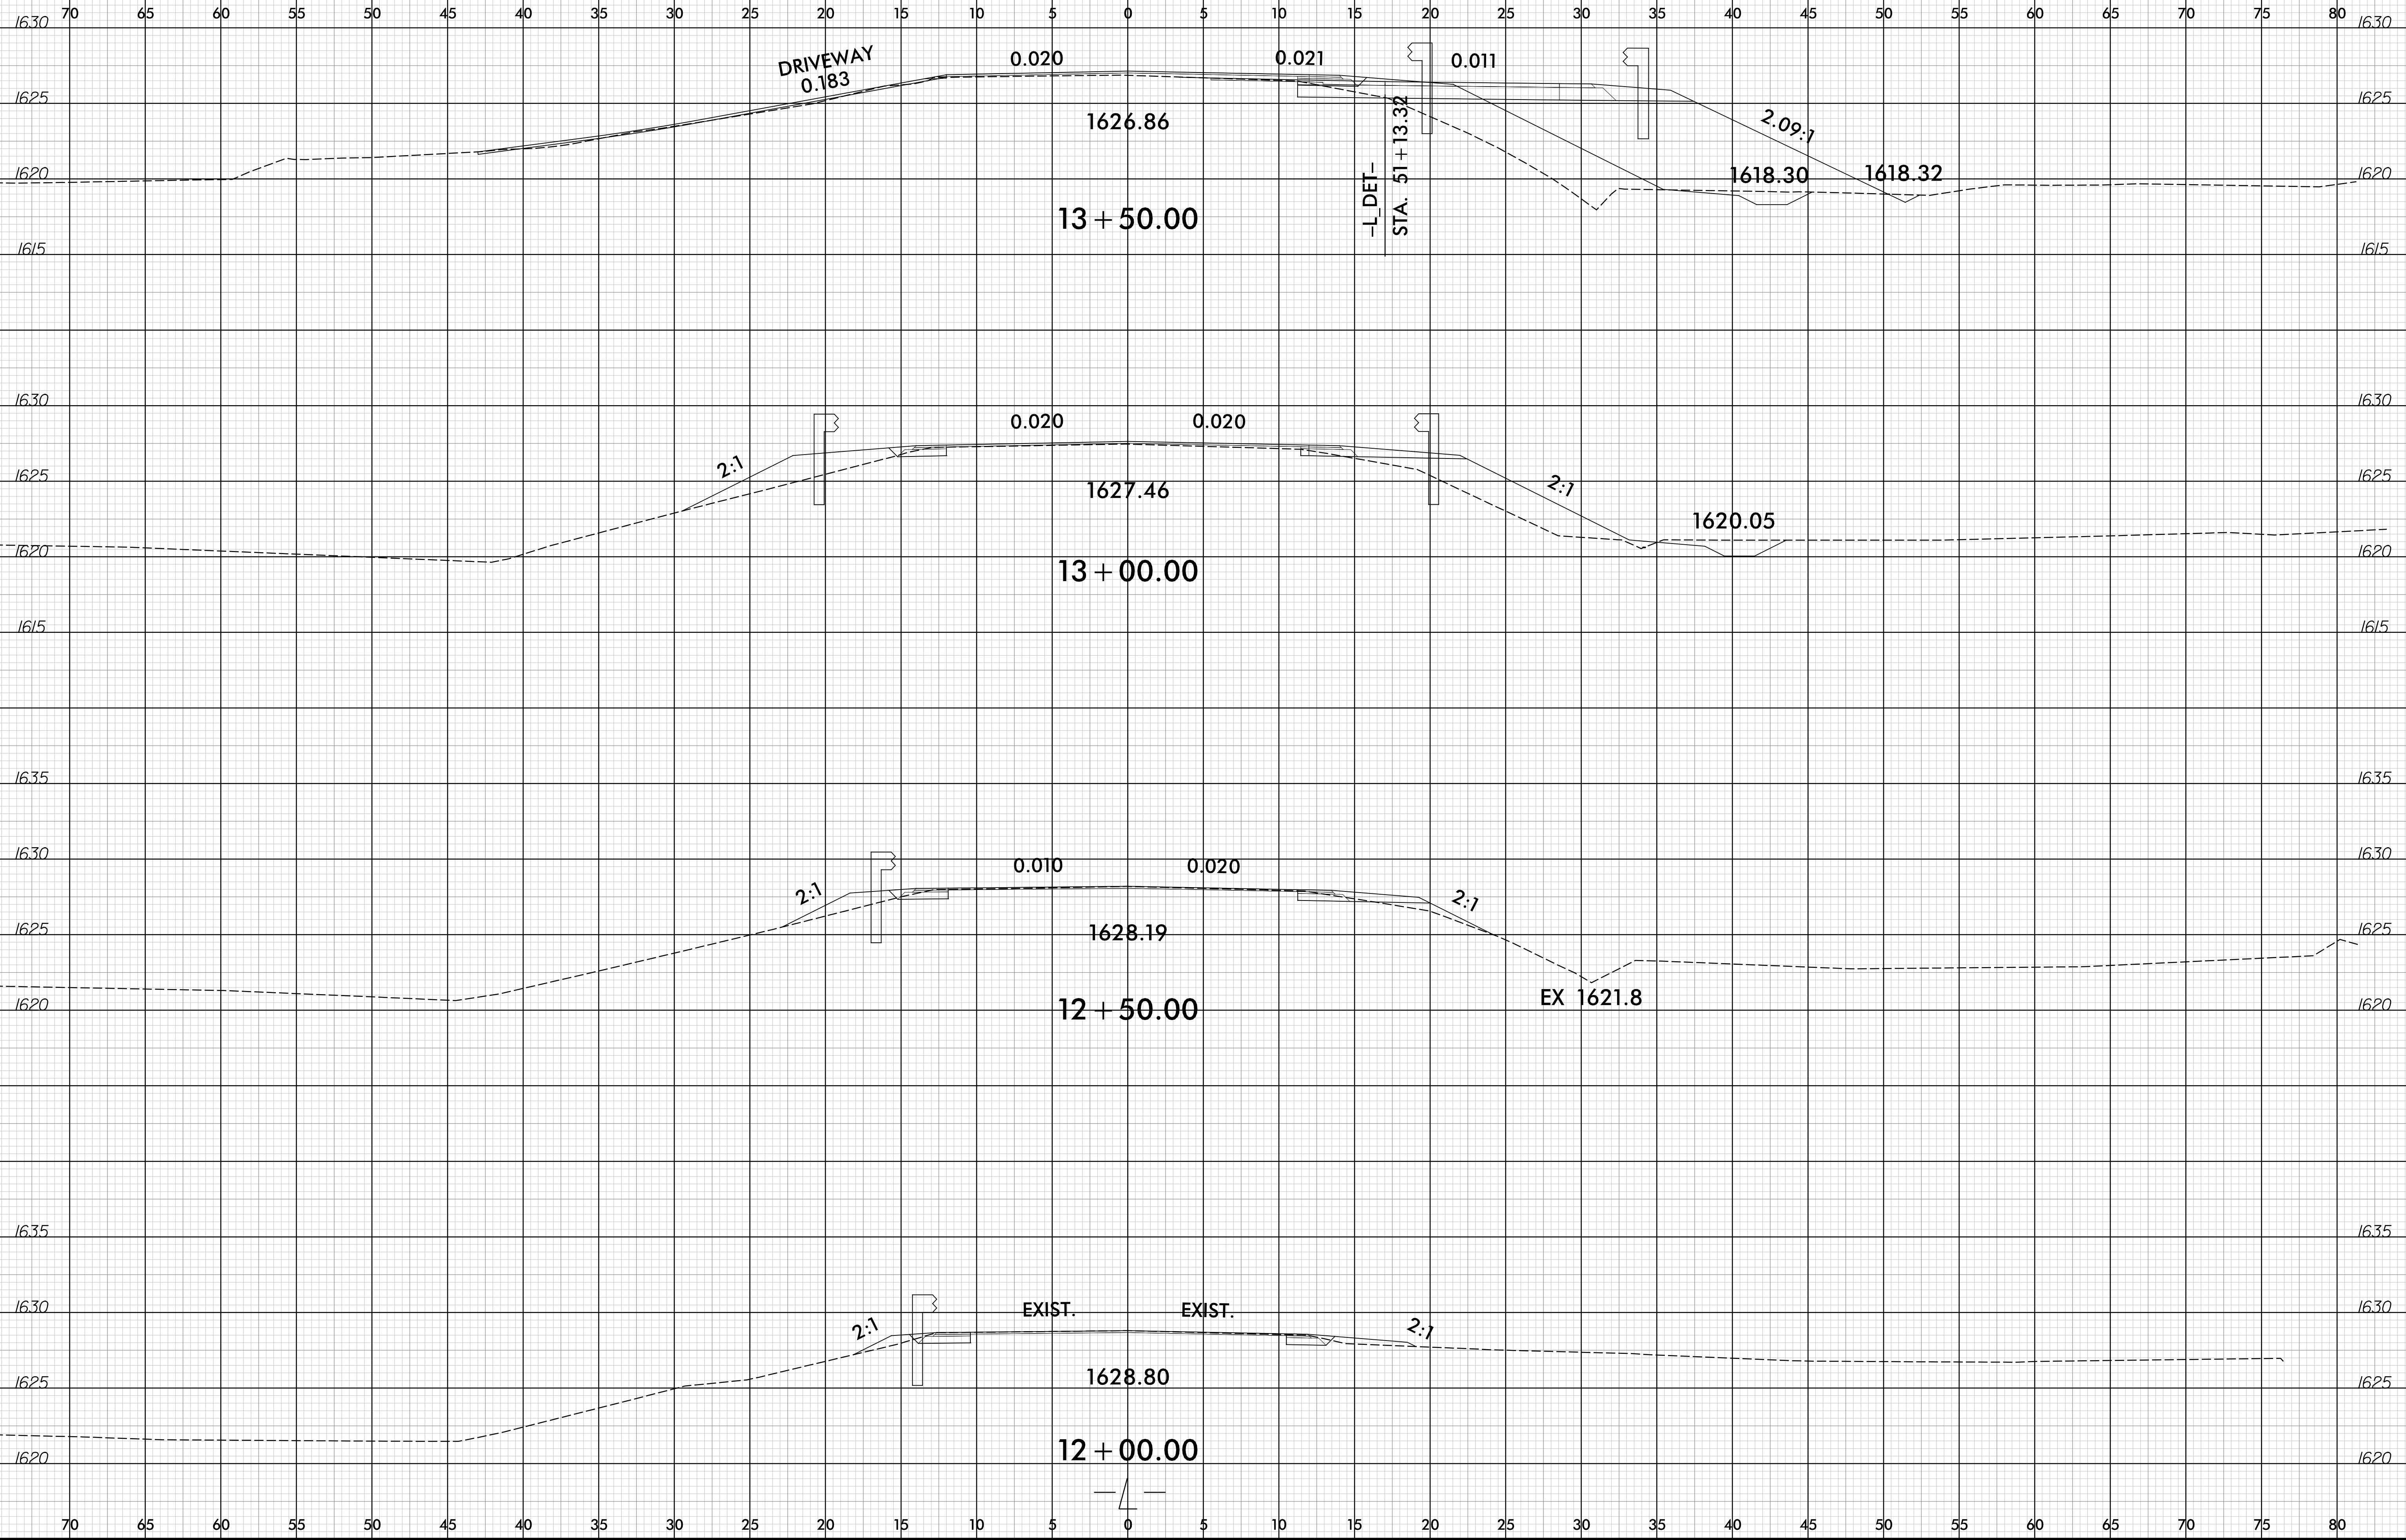


3/4/2021
BR-0011
rsargent

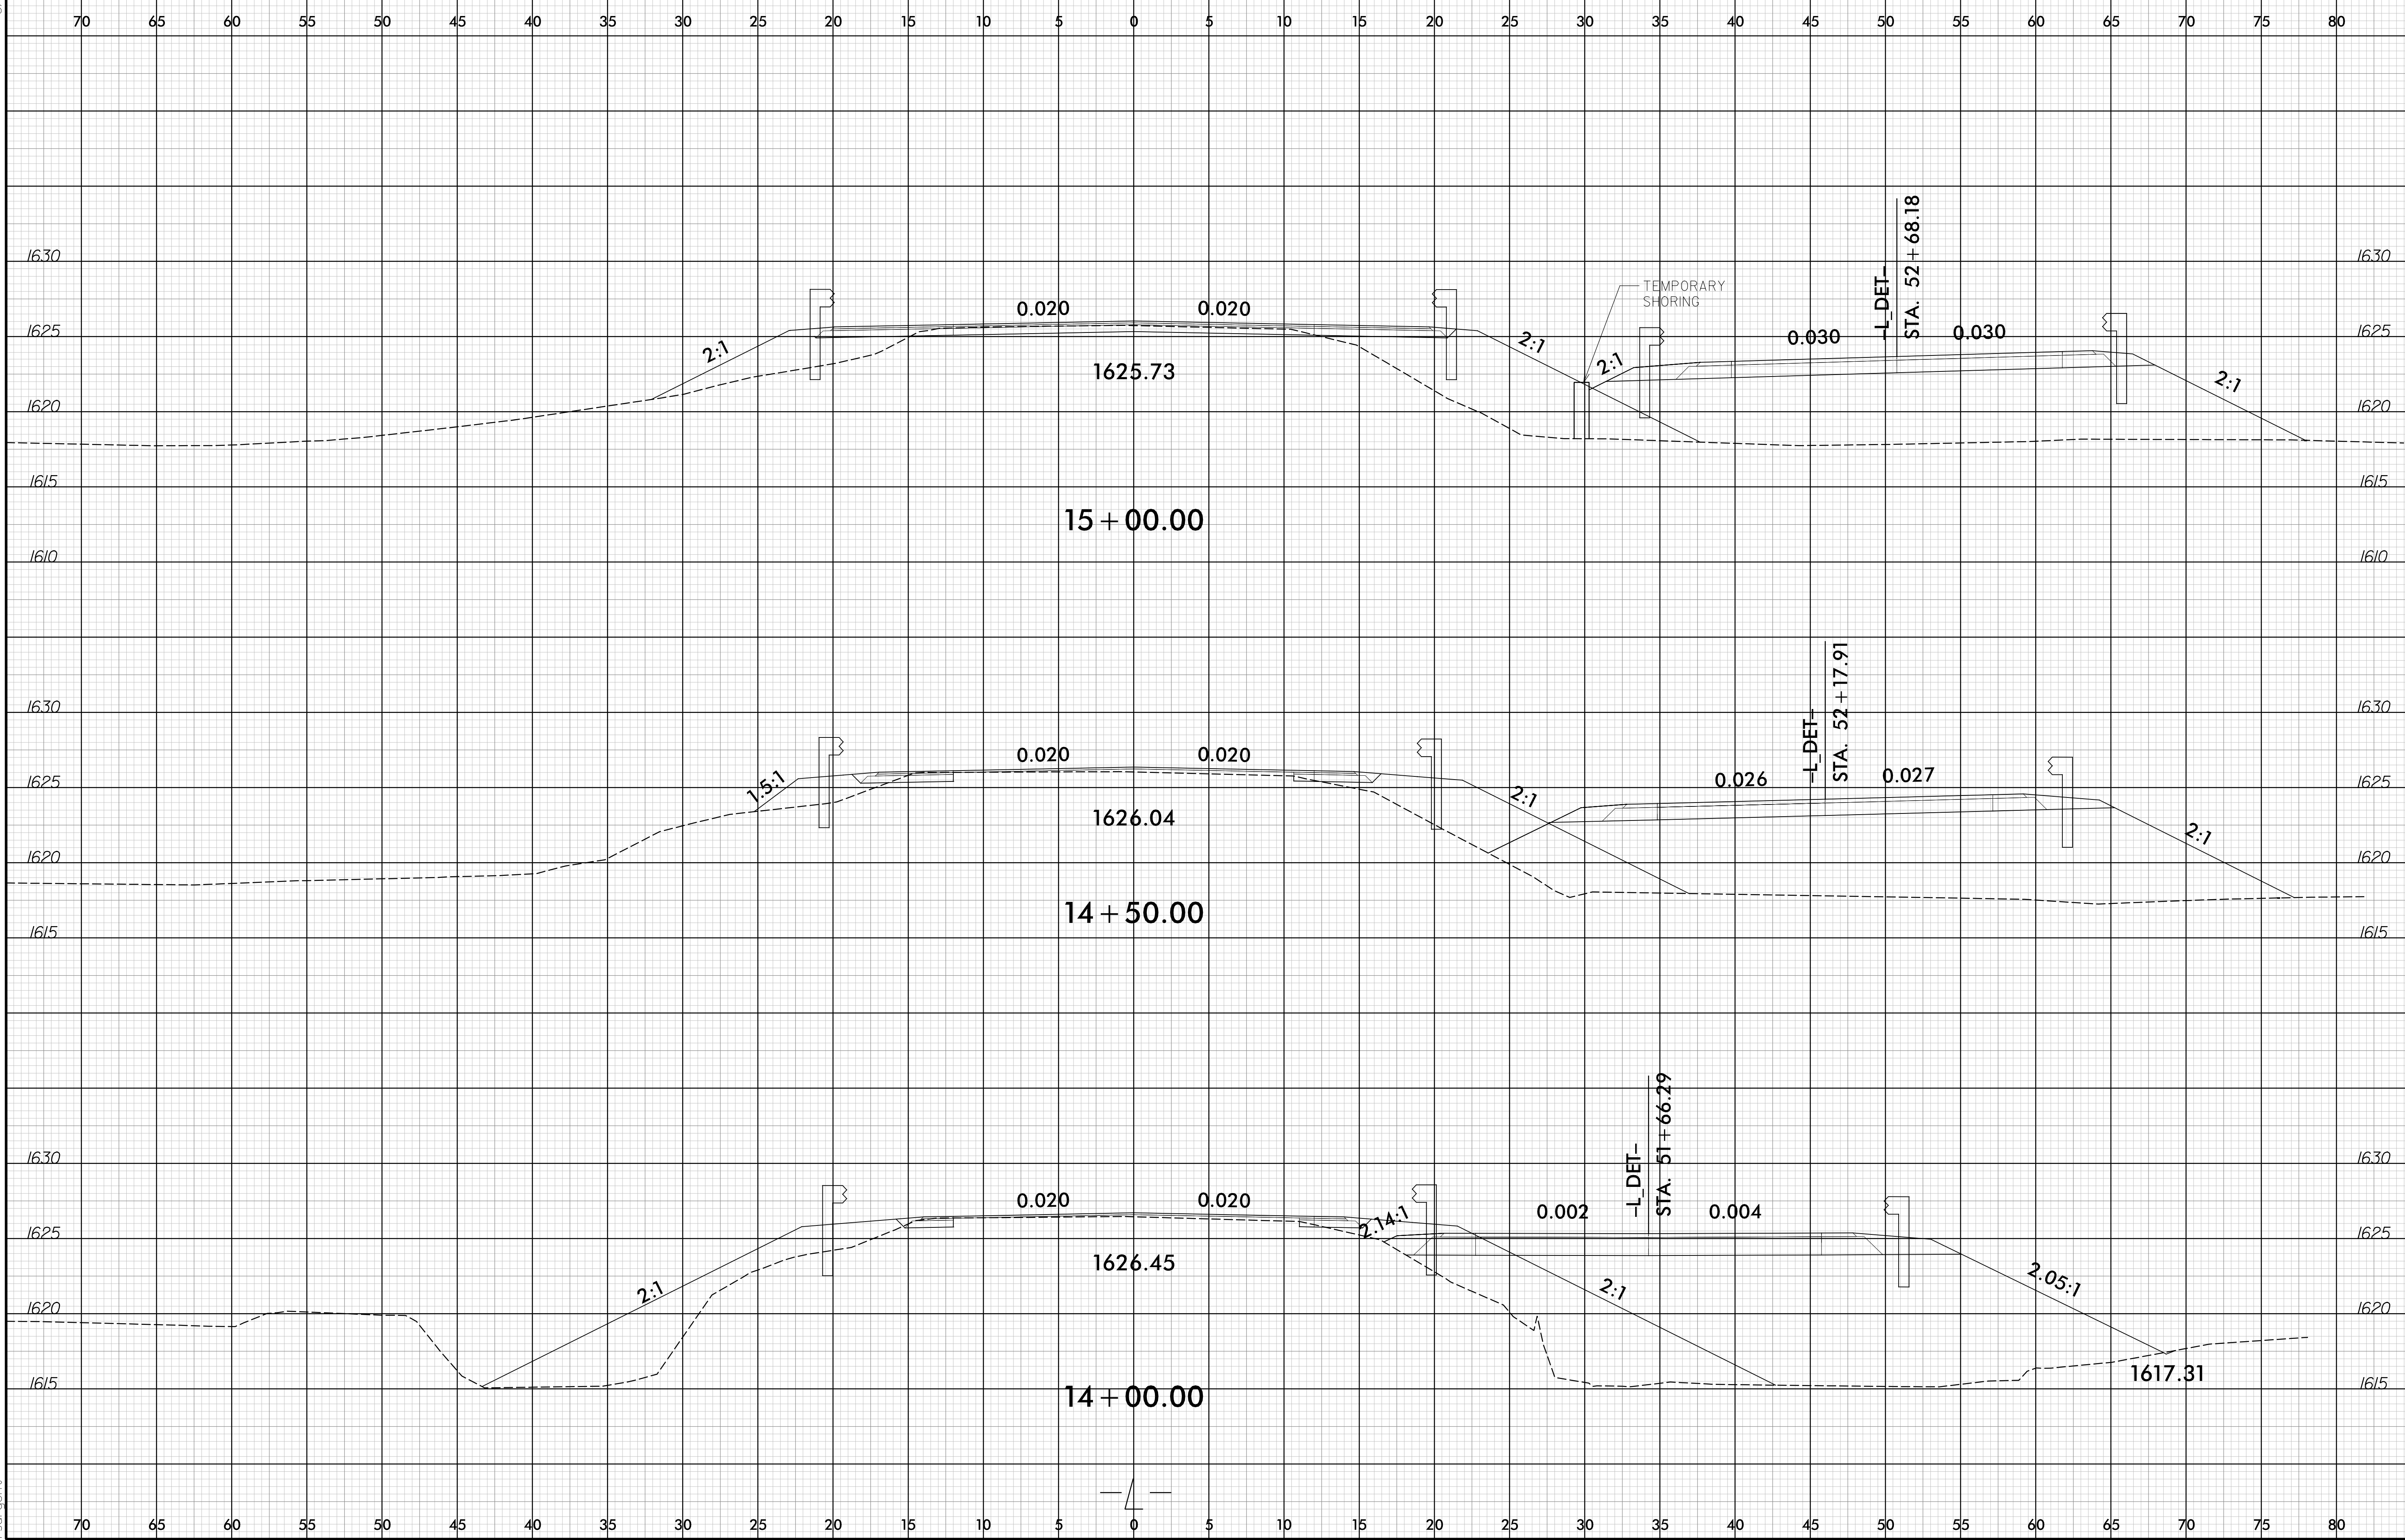


6/23/16




PROJ. REFERENCE NO.	SHEET NO.
BR-0011	X-4

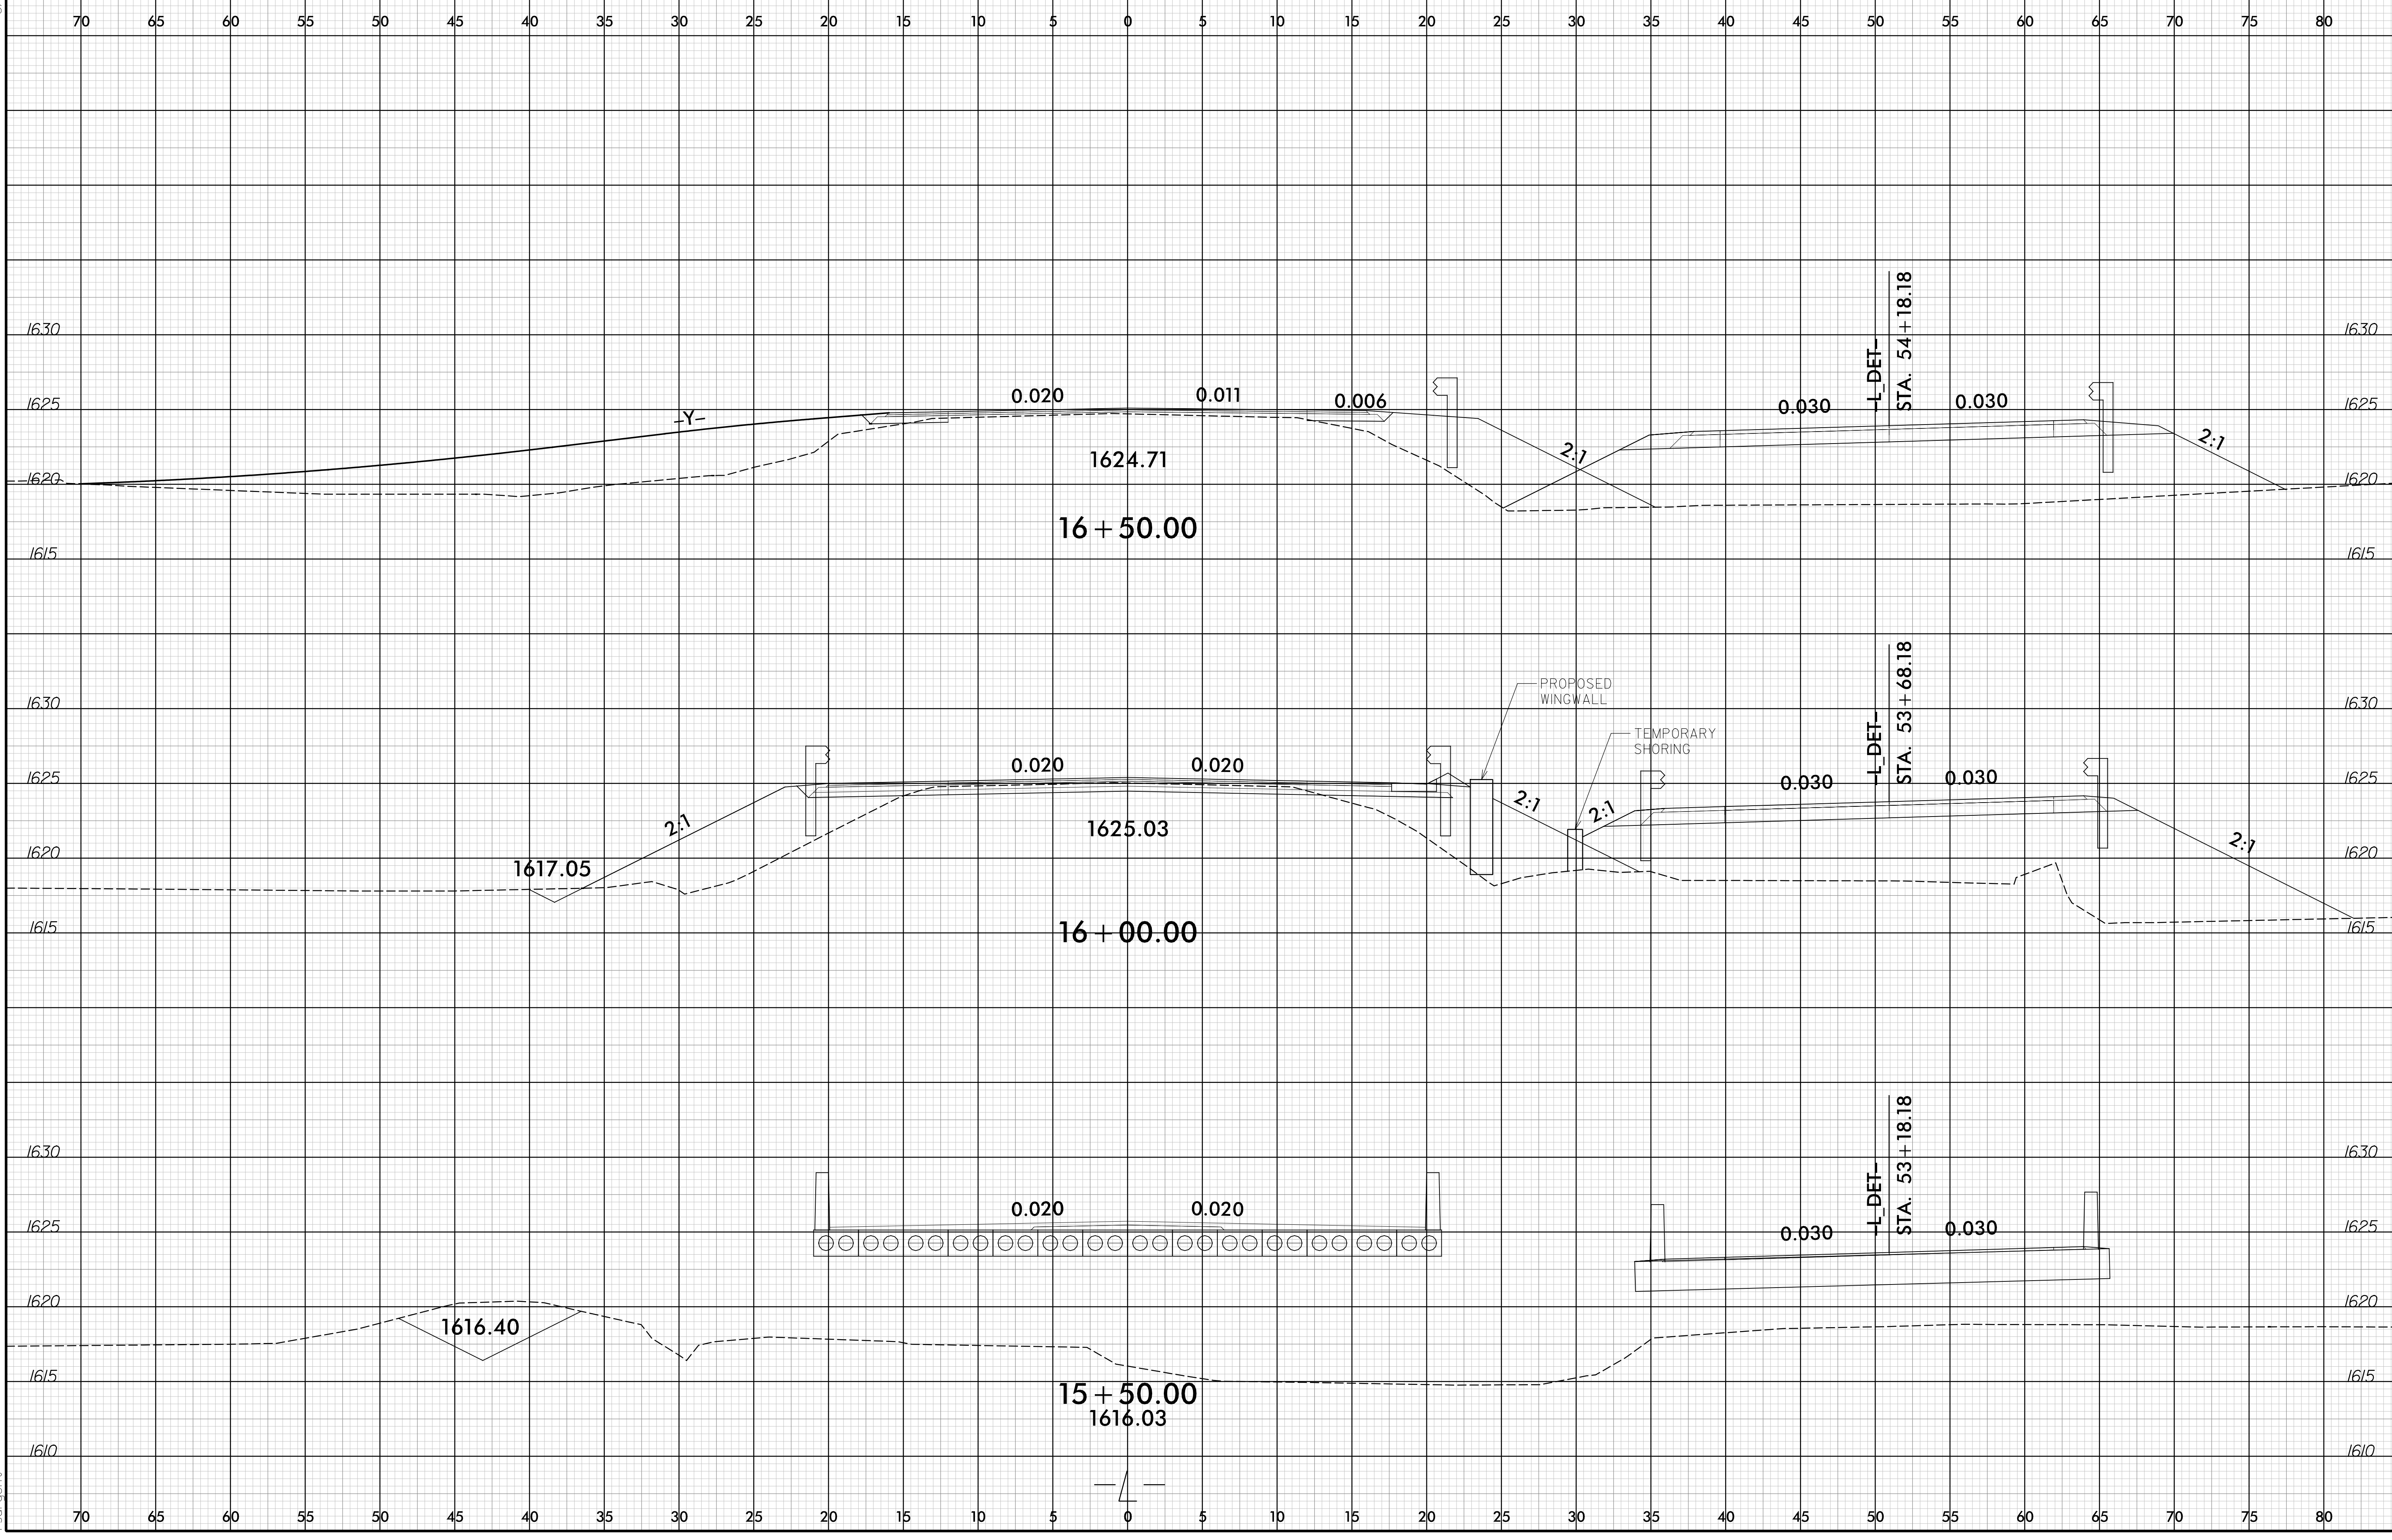


3/4/2021
BR-0011
rsargent

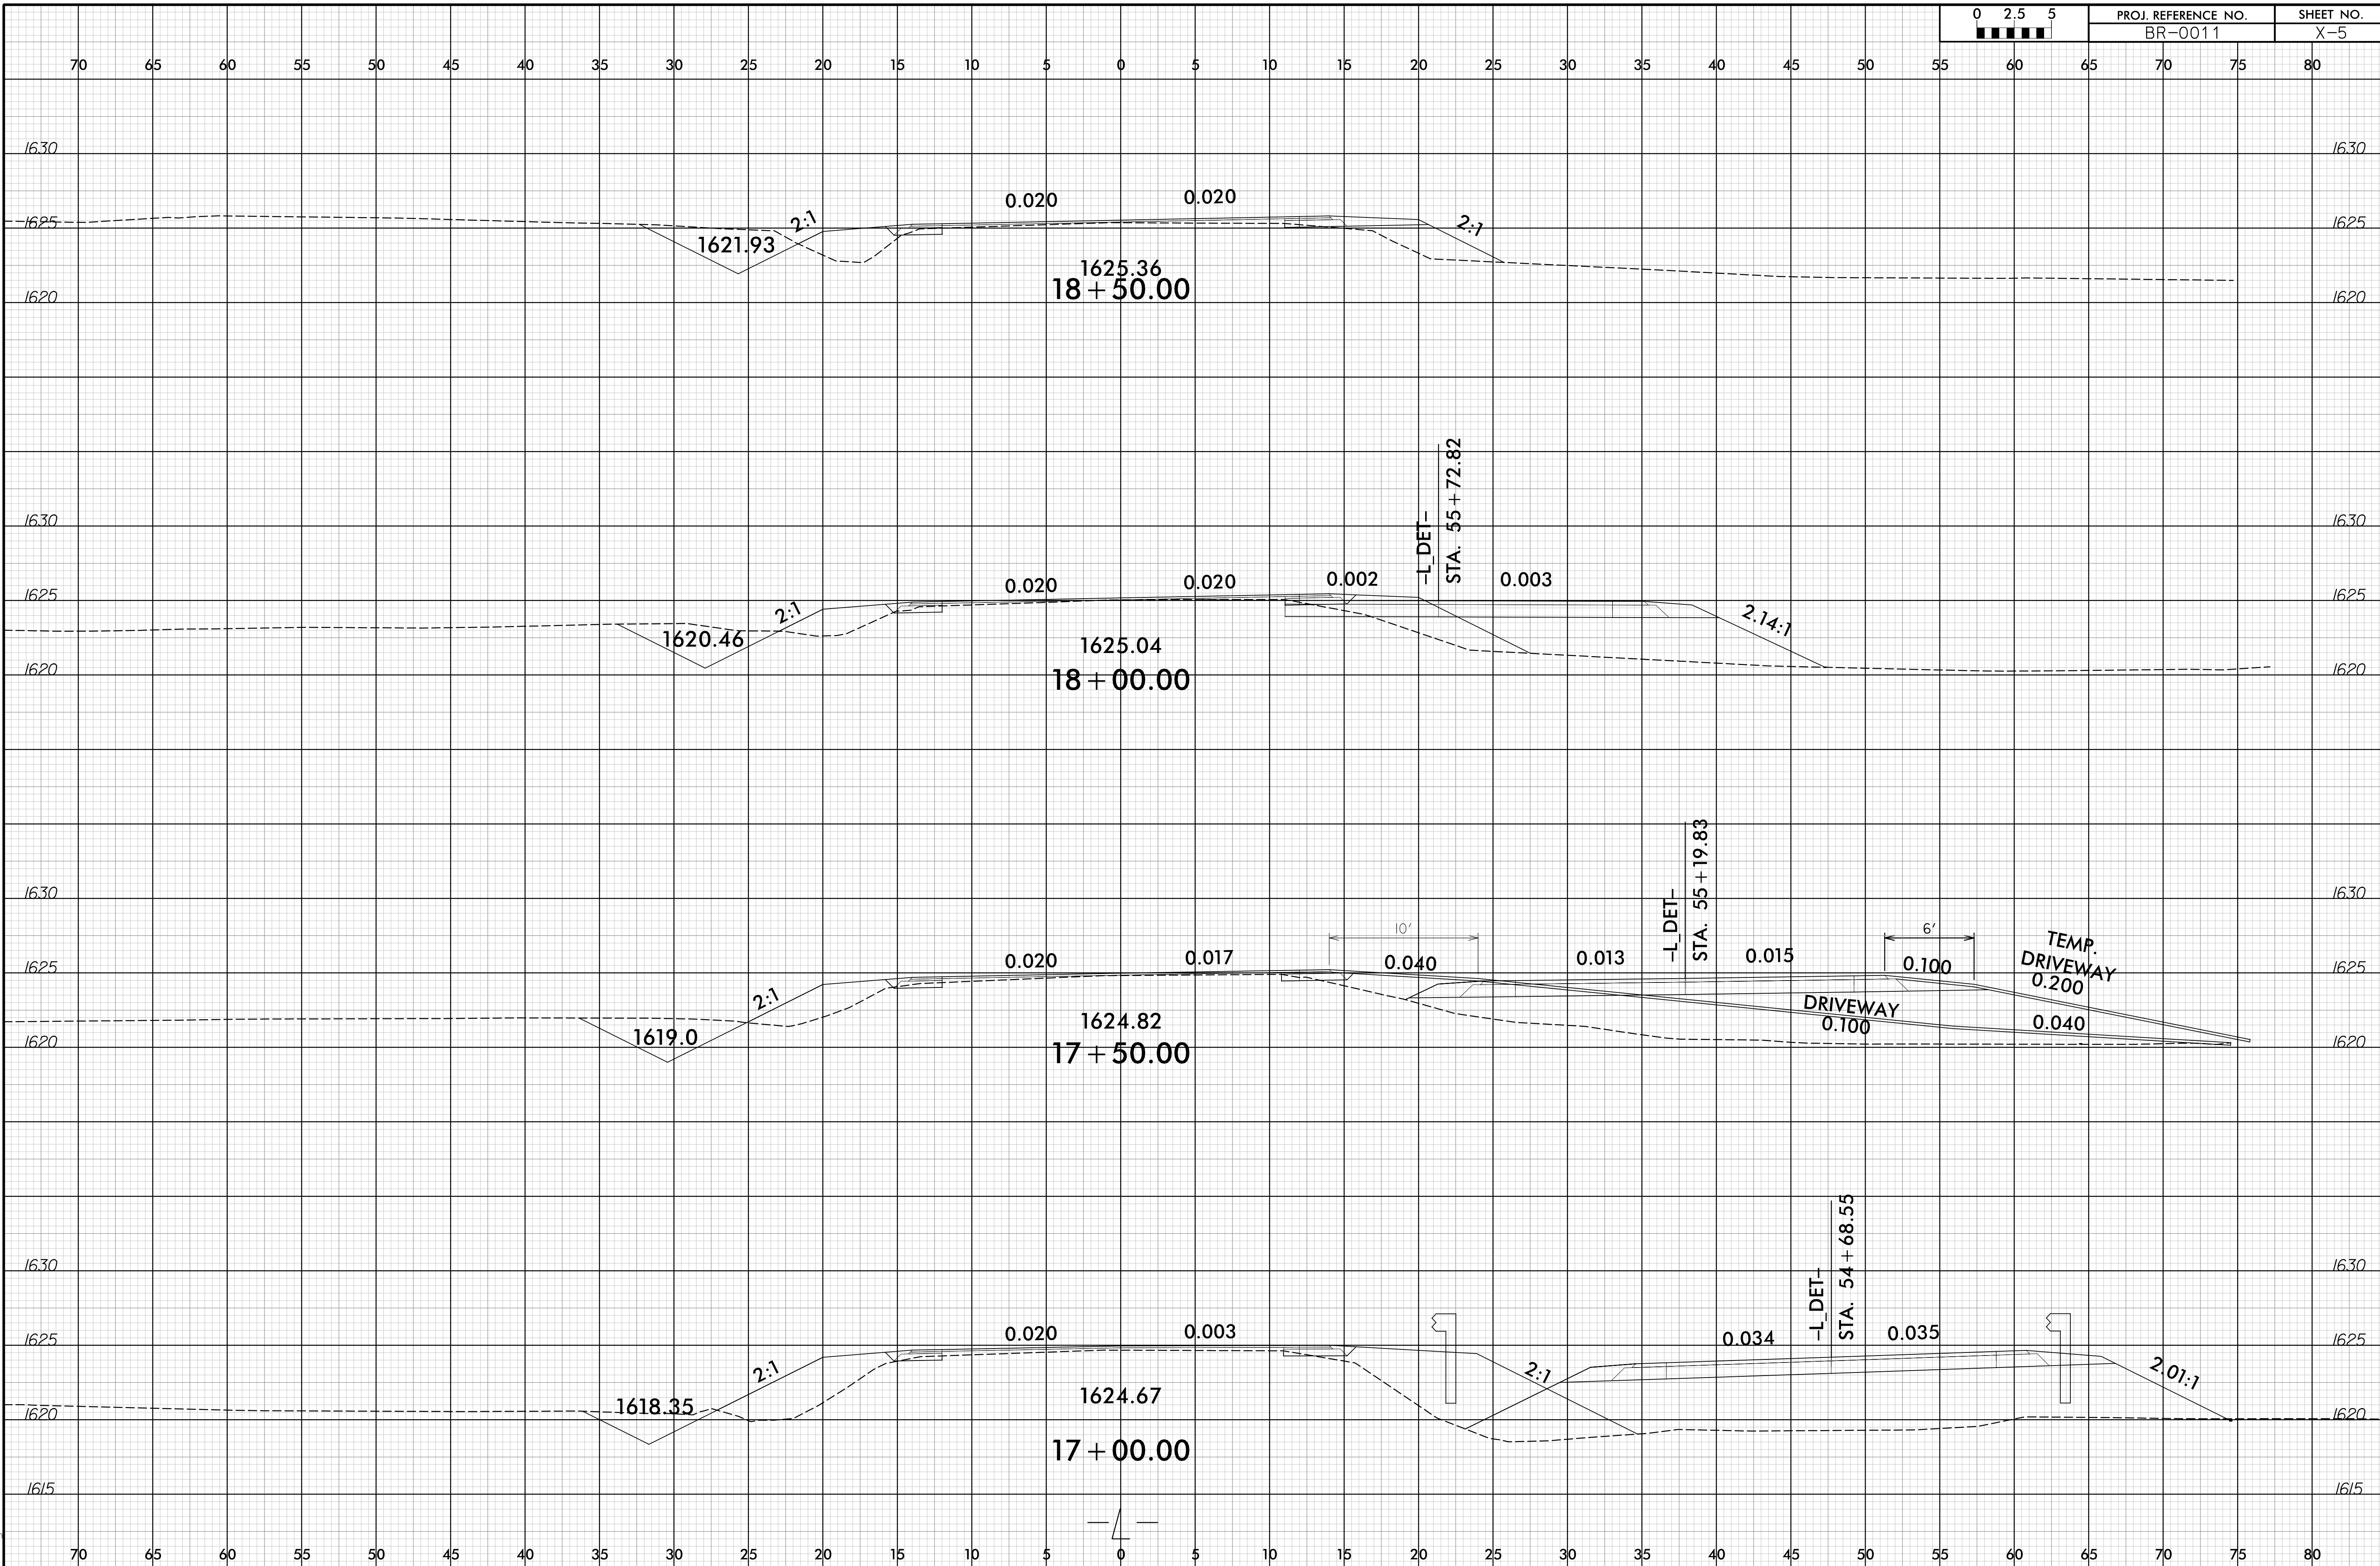

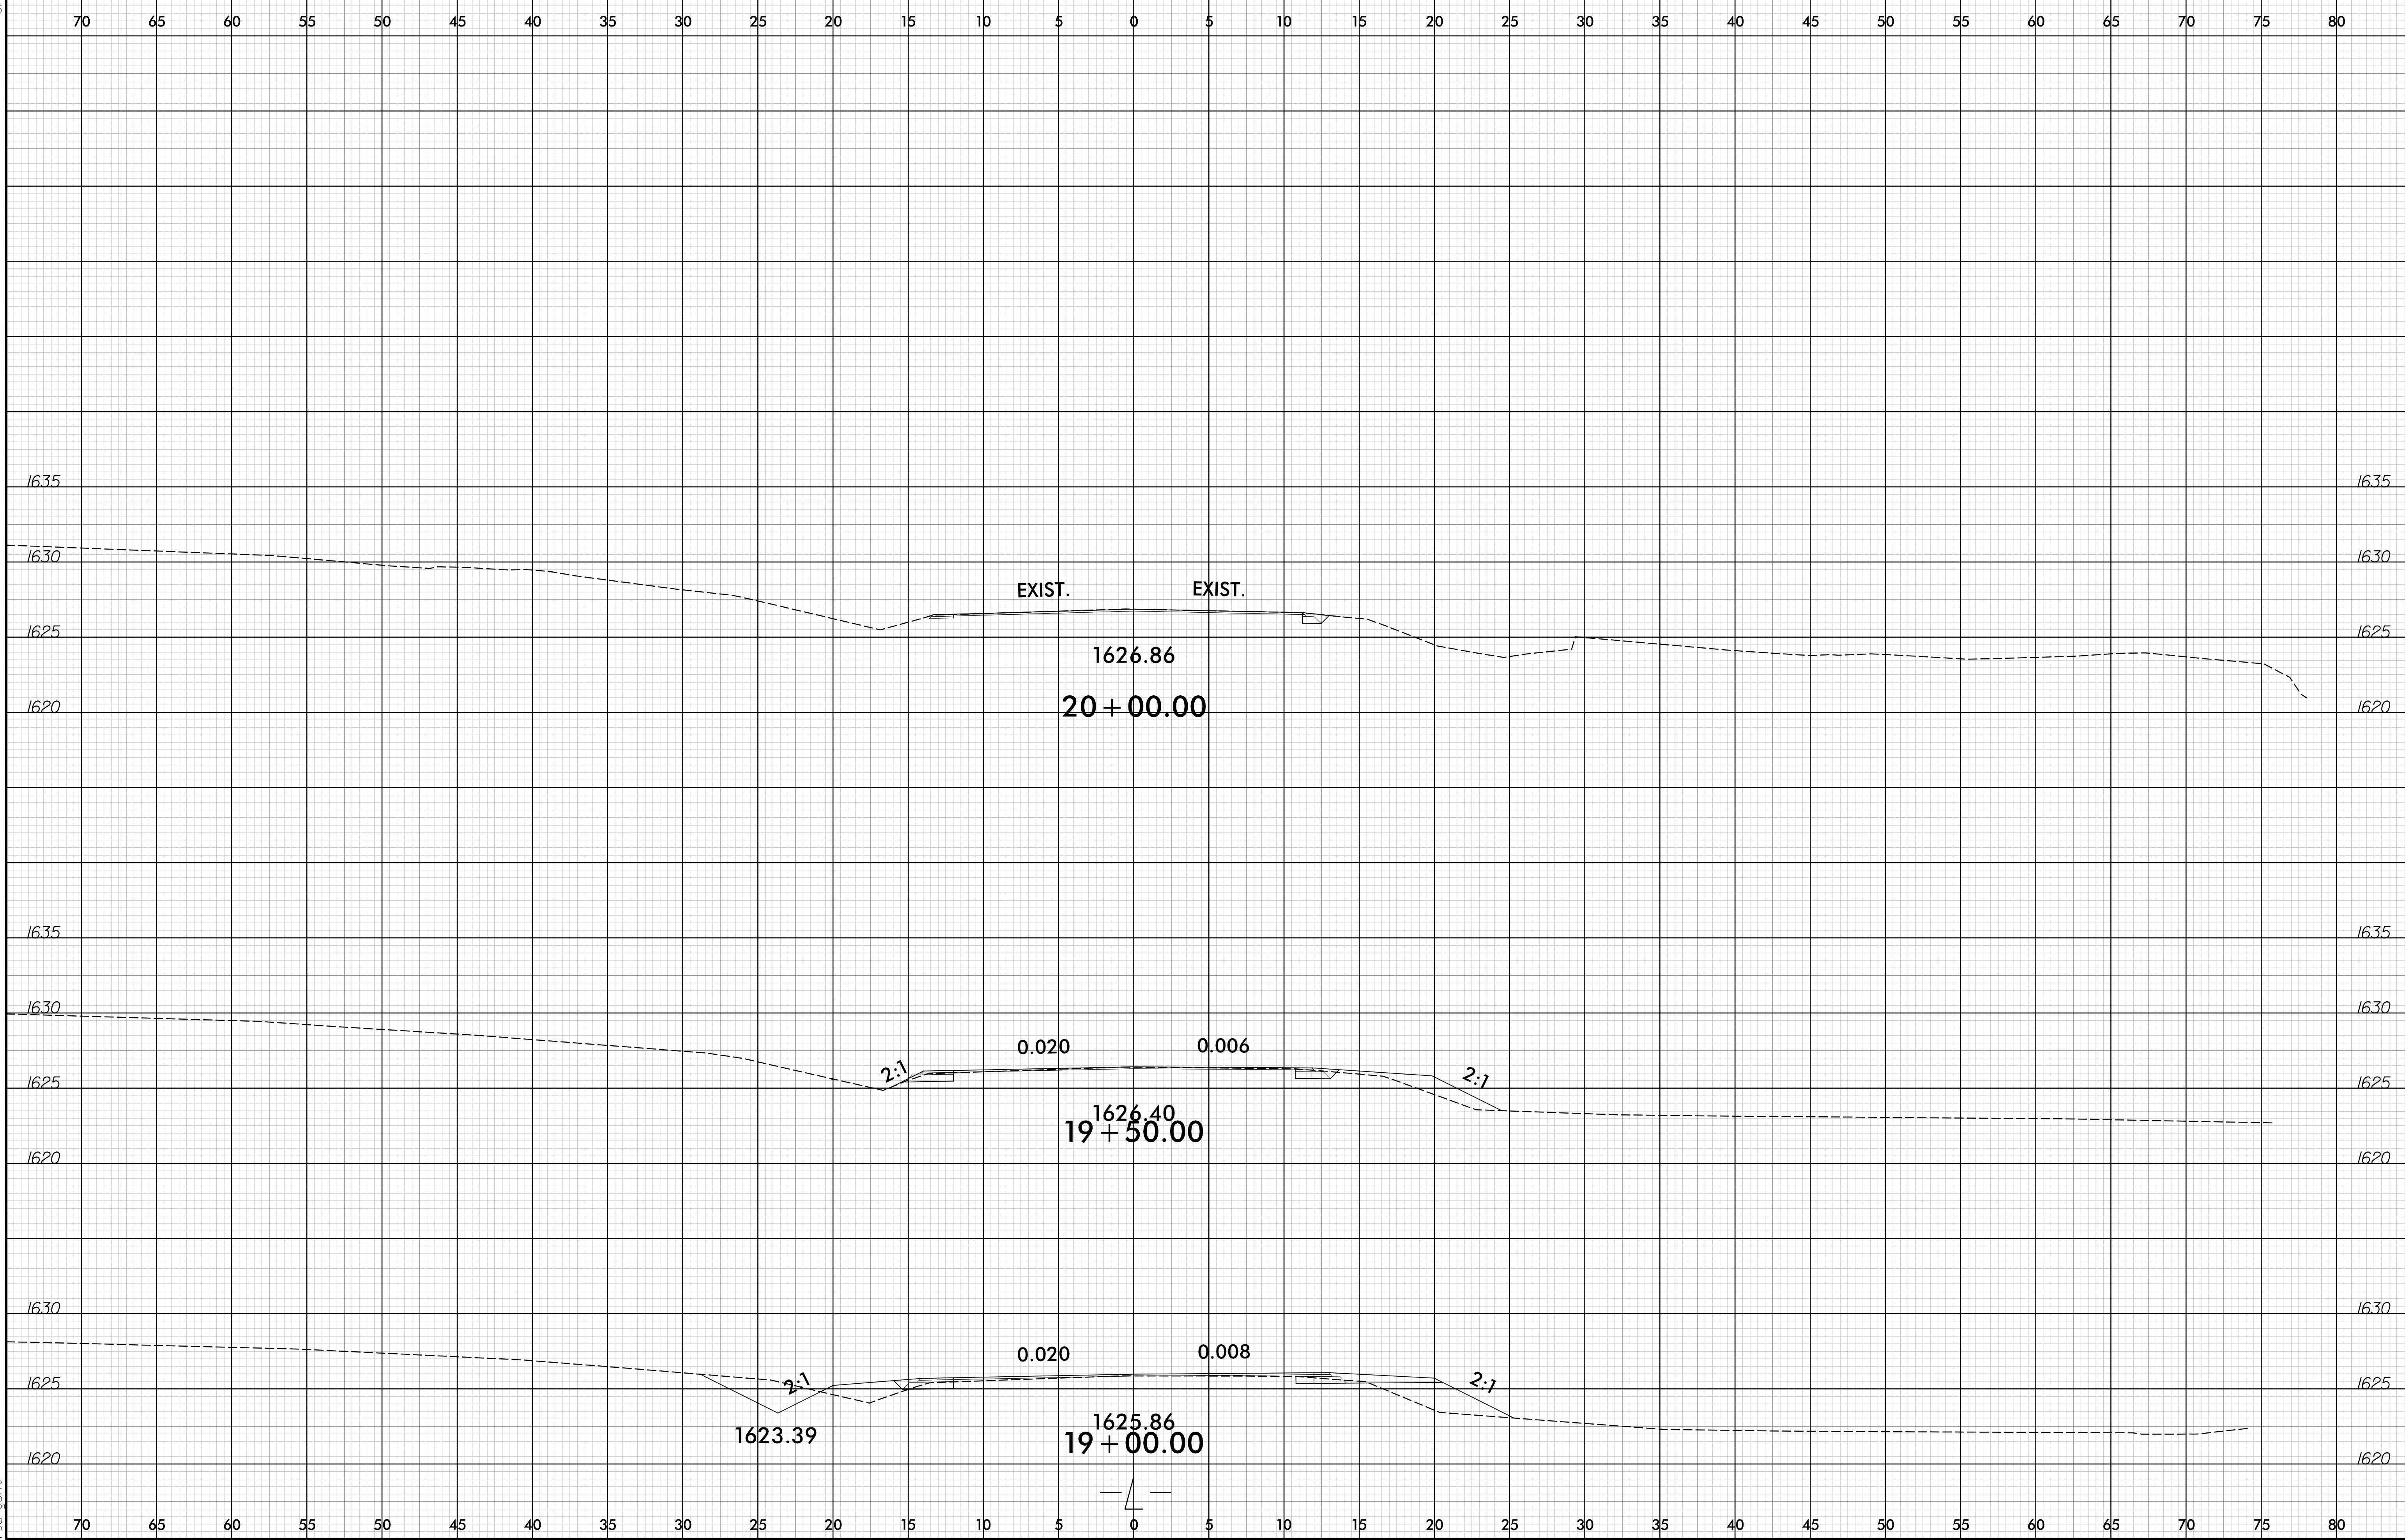




75 70 65 60 55 50 45 40 35 30 25 20 15 10 5 0 5 10 15 20 25 30 35 40 45 50

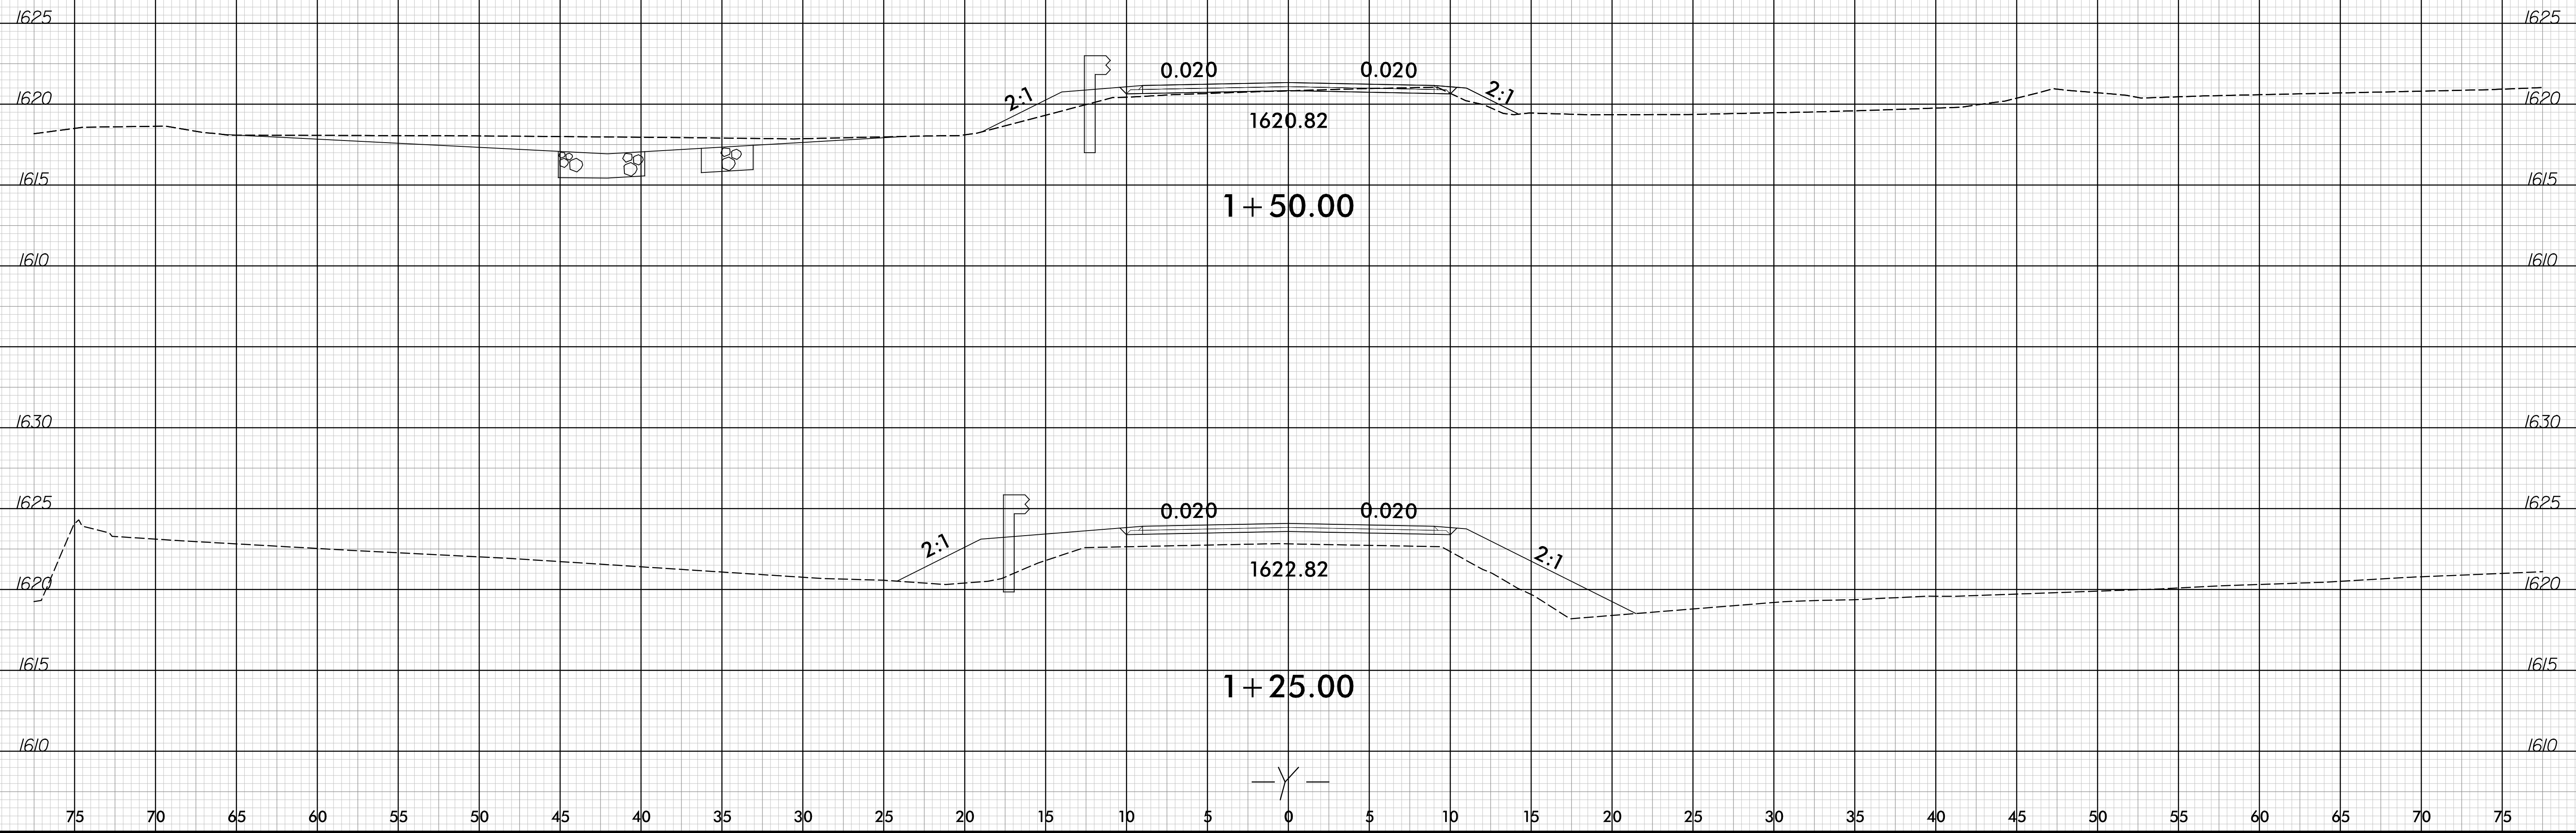

6/23/16

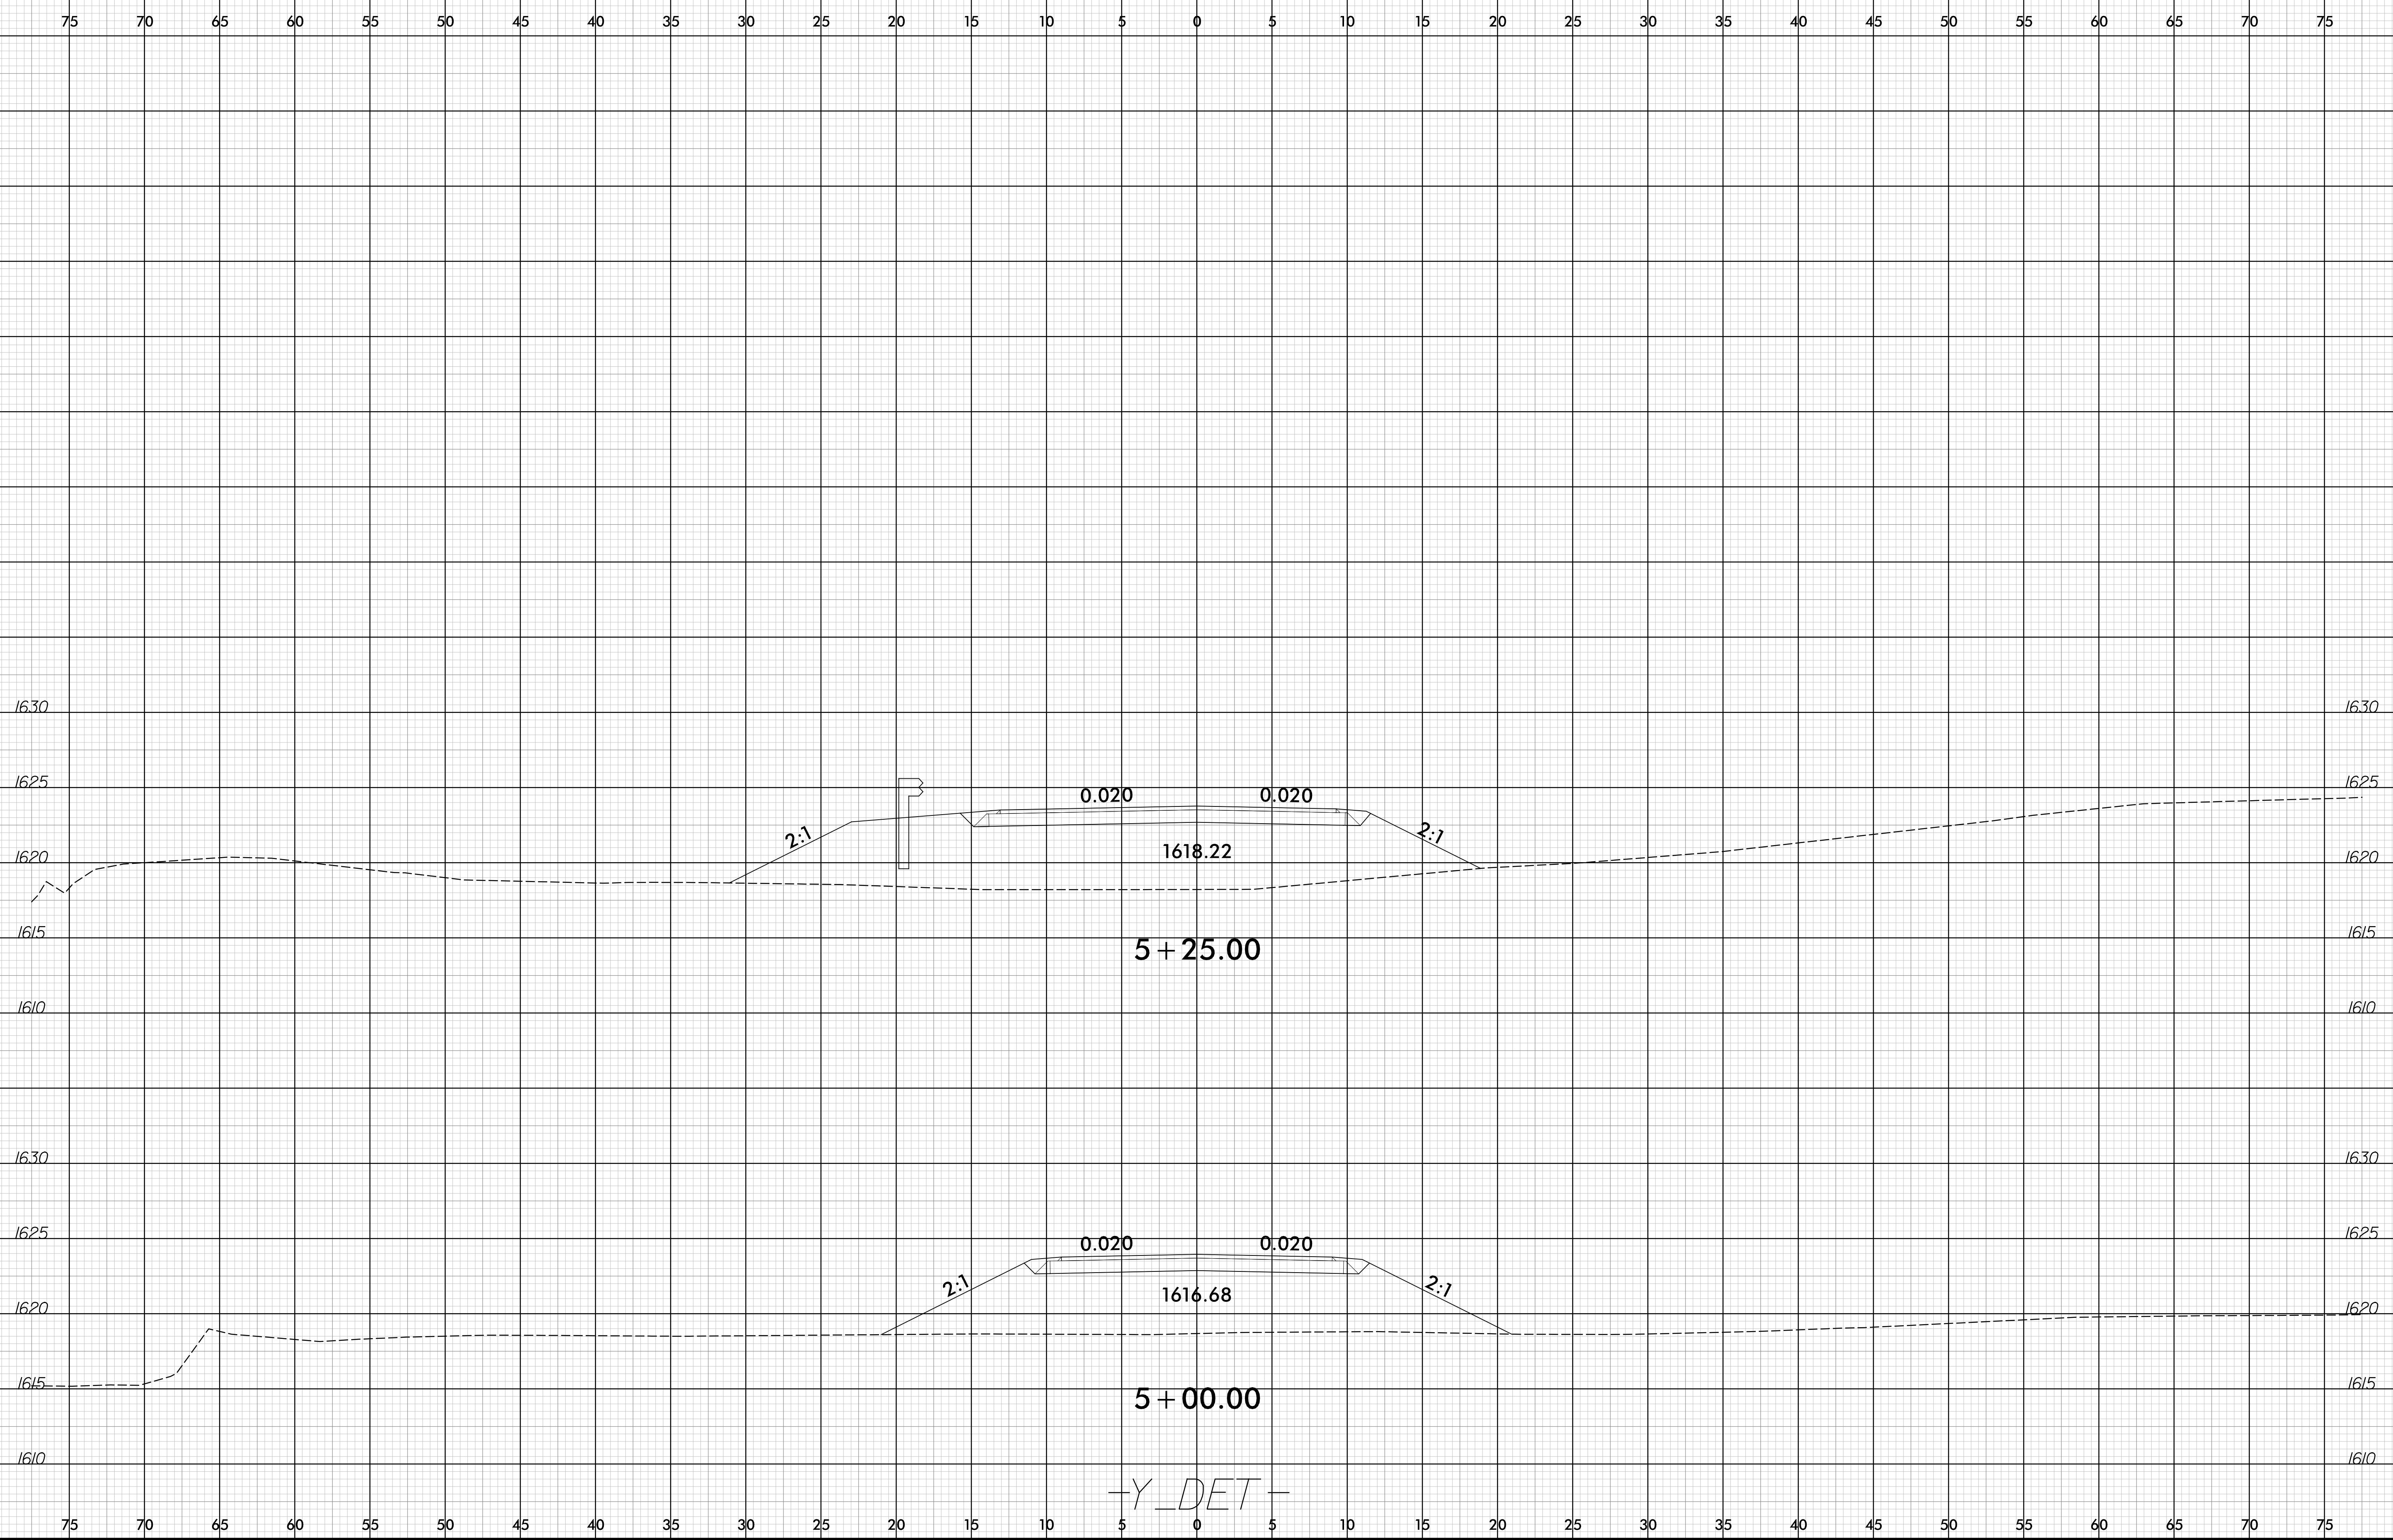

3/4/2021
BR-0011
rsargent

-Y_DET-