


SUMMARY OF WORK BY CABLE ROUTING PLANS

CABLE ROUTING SHEET NUMBER	MESSENGER CABLE (1/4")	BOND MESSENGER CABLE	BOND RISER	TRACER WIRE	UNDERGROUND CONDUIT (1 CONDUIT, 1 INCH)	UNDERGROUND CONDUIT (1 CONDUIT, 2 INCH)	UNDERGROUND CONDUIT (2 CONDUIT, 2 INCH)	DIRECTIONAL DRILL (2 CONDUIT, 2 INCH)	JUNCTION BOX (OVER-SIZED)	JUNCTION BOX (SPECIAL-SIZED)	REMOVE EXISTING JUNCTION BOX	DELINEATOR MARKER	JUNCTION BOX MARKER	MOLDABLE DUCT SEAL
	LF	EA	EA	LF	LF	LF	LF	LF	EA	EA	EA	EA	EA	EA
CRP-037	515	2	2	10			30		2		1		2	
CRP-038	180	1	1	480		195	50		1			2		3
CRP-039	445	1	1	700				205	1			1	1	
CRP-040	1,320	1												
CRP-041	1,380		2											
CRP-042								700		1		1		
CRP-043				1,415			1,015	400	2				2	
CRP-044				1,435				1,315	180	2	1	1		
CRP-045				1,600		10	1,295	285	1	1		2	1	1
CRP-046				1,445				1,445	1			1		
CRP-047				1,445				1,445	1			1	1	
CRP-048				1,445				1,445	2			1	1	
CRP-049				1,445			1,325	120	2			1	1	
CRP-050				1,420			1,330	230	4	1	1			
CRP-051				1,355			850	510	3			1		
CRP-052				1,380			1,380		1			1		
CRP-053				1,565			920	645	4			1		
CRP-054				1,230			60	1,170	3			2	1	
CRP-055	892	1		297			242	102	3			2	1	4
CRP-056	885			556			270	261	3			2	1	4
CRP-057	1,410													
CRP-058	716	1	2	866	30		866		2			1	1	3
CRP-059				1,450			708	742	3			1	2	3
CRP-060	255		1	1,424	20		785	628	4	1		4	1	6
CRP-061				1,040			877	163	3			1	2	3
CRP-062	195		1	744	10		640	85	1	1		1	1	3
CRP-063				1,190			542	655	3			1	2	3
CRP-064	860	2	2	720			359	386	3	1		2	2	6
CRP-065	1,420	1												
CRP-066	1,180	2	2	355			265	95	3			3		3
CRP-067	1,275	1	1	180			15	165	1			1		1
CRP-068	1,000	2	2	510	20		200	330	1	1		1	1	3
CRP-069	1,255	1	1	20			20							1
Total	25,058	66	51	44,647	95	275	23,703	18,845	114	15	2	67	46	63

- Work shown on this sheet is a summary of work for the installation of the fiber-optic cable and CCTV installations that are shown on the cable routing plans (i.e. CRP sheets). Work to be done for traffic signals is shown separately on the signal designs and the "Summary of Work by Intersection" sheets in Volume III of III.
- The items listed above are for informational purposes only and represent work that is necessary to complete the project and are not necessarily pay items. See Summary of Quantities and the Project Special Provisions for defined Pay Items for this contract.

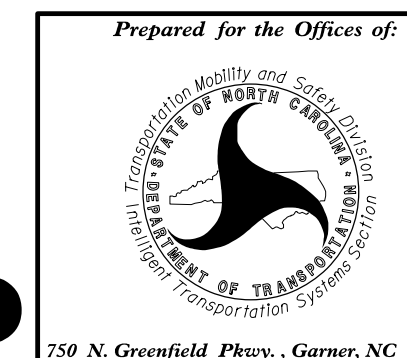

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Elizabeth City Signal System
Summary of Work by
Cable Routing Plans
(sheet 2 of 4)


Division 1 Pasquotank County Elizabeth City

PLAN DATE: April 2018 REVIEWED BY: RD Lawton

PREPARED BY: DJ White REVIEWED BY: LW Moon

REVISIONS: _____ INIT. DATE

N. T. S.

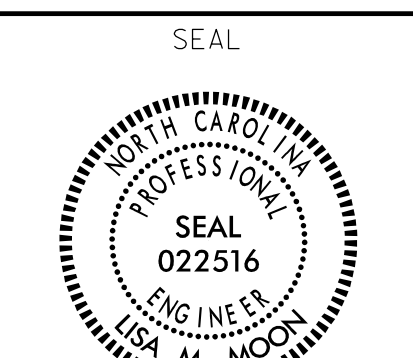

DocuSigned by:
Lisa Moon 1/16/2019
DATE: _____
CADD Filename: _____