



TIP PROJECT: B-5666

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

SIGNING PLAN

WILSON COUNTY

**LOCATION: BRIDGE NO. 47 OVER SEABOARD COAST LINE RAILROAD
ON US 117**

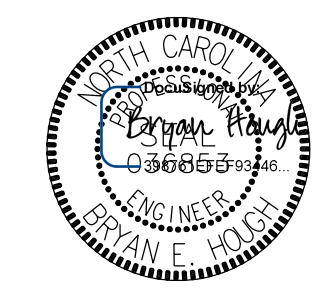PROJ. REFERENCE NO. B-5666	SHEET NO. SIGN-1
APPROVED: _____	
DATE: 5/7/2020	
SEAL	
	
	
Engineers • Planners • Scientists • Construction Managers 4601 Six Forks Road, Landmark Center II, Suite 210 Raleigh, NC 27609-5210 Phone (919) 783-9214 • Fax (919) 783-9266	

SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000-E	903	SUPPORTS, 3-LB STEEL U-CHANNEL	120	LF.
4102000000-N	904	SIGN ERECTION, TYPE E	4	EA.
4108000000-N	904	SIGN ERECTION, TYPE F	1	EA.
4116100000-N	904	SIGN ERECTION, RELOCATE TYPE E (GROUND MOUNTED)	3	EA.
4155000000-N	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	5	EA.
4192000000-N	907	DISPOSAL OF SUPPORT, U-CHANNEL	3	EA.

GENERAL NOTES

- SIGNS FURNISHED BY STATE.
- CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

INDEX

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET
SIGN-3	TYPE "E" & "F" SIGNS
SIGN-4	EXISTING AND PROPOSED SIGNS

PROJ. REFERENCE NO.	SHEET NO.
B-5666	SIGN-3

401 QUANTITY REQ'D 2



R2-1
24" X 30"

ONE "U" POST PER SIGN


402 QUANTITY REQ'D 1



W8-13
36" X 36"

ONE "U" POST PER SIGN

403 QUANTITY REQ'D 1

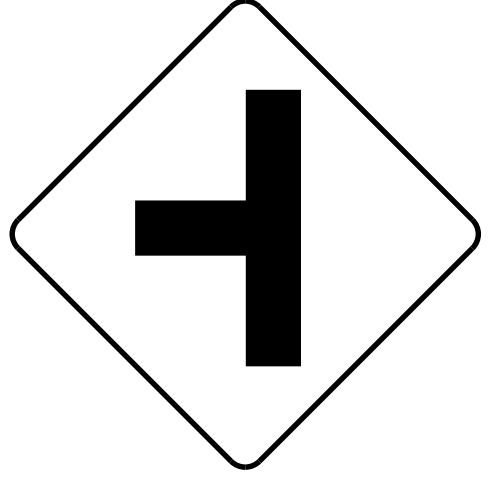

W2-2
48" X 48"

ONE "U" POST PER SIGN

404 QUANTITY REQ'D 1



W13-1P
24" X 24"

MOUNT BELOW SIGN 403
IN 1 INSTALLATION

501 QUANTITY REQ'D 1



M3-1
24" X 12"

M1-4
36" X 36"


ONE "U" POST PER SIGN

3/30/2020
M:\2018\2518101945\22 B-5666\Traffic\TrafficControl\TCP\B5666_SGNL_03.dgn
User: bryan.hough


KCI Engineers • Planners • Scientists • Construction Managers
4505 Falls of Neuse Road, Suite 400
Raleigh, NC 27609-4270
Phone (919) 783-9214 • Fax (919) 783-9266

APPROVED: _____
DATE: 5/7/2020



SEAL

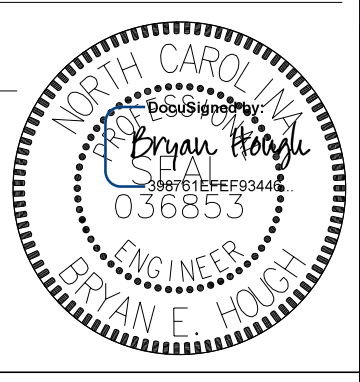

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

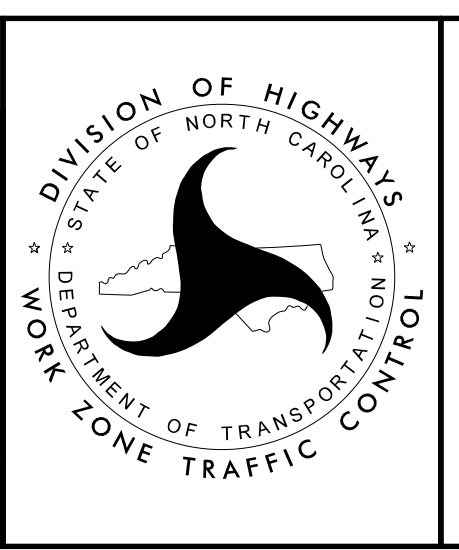

**TYPE "E" & "F"
SIGNS**

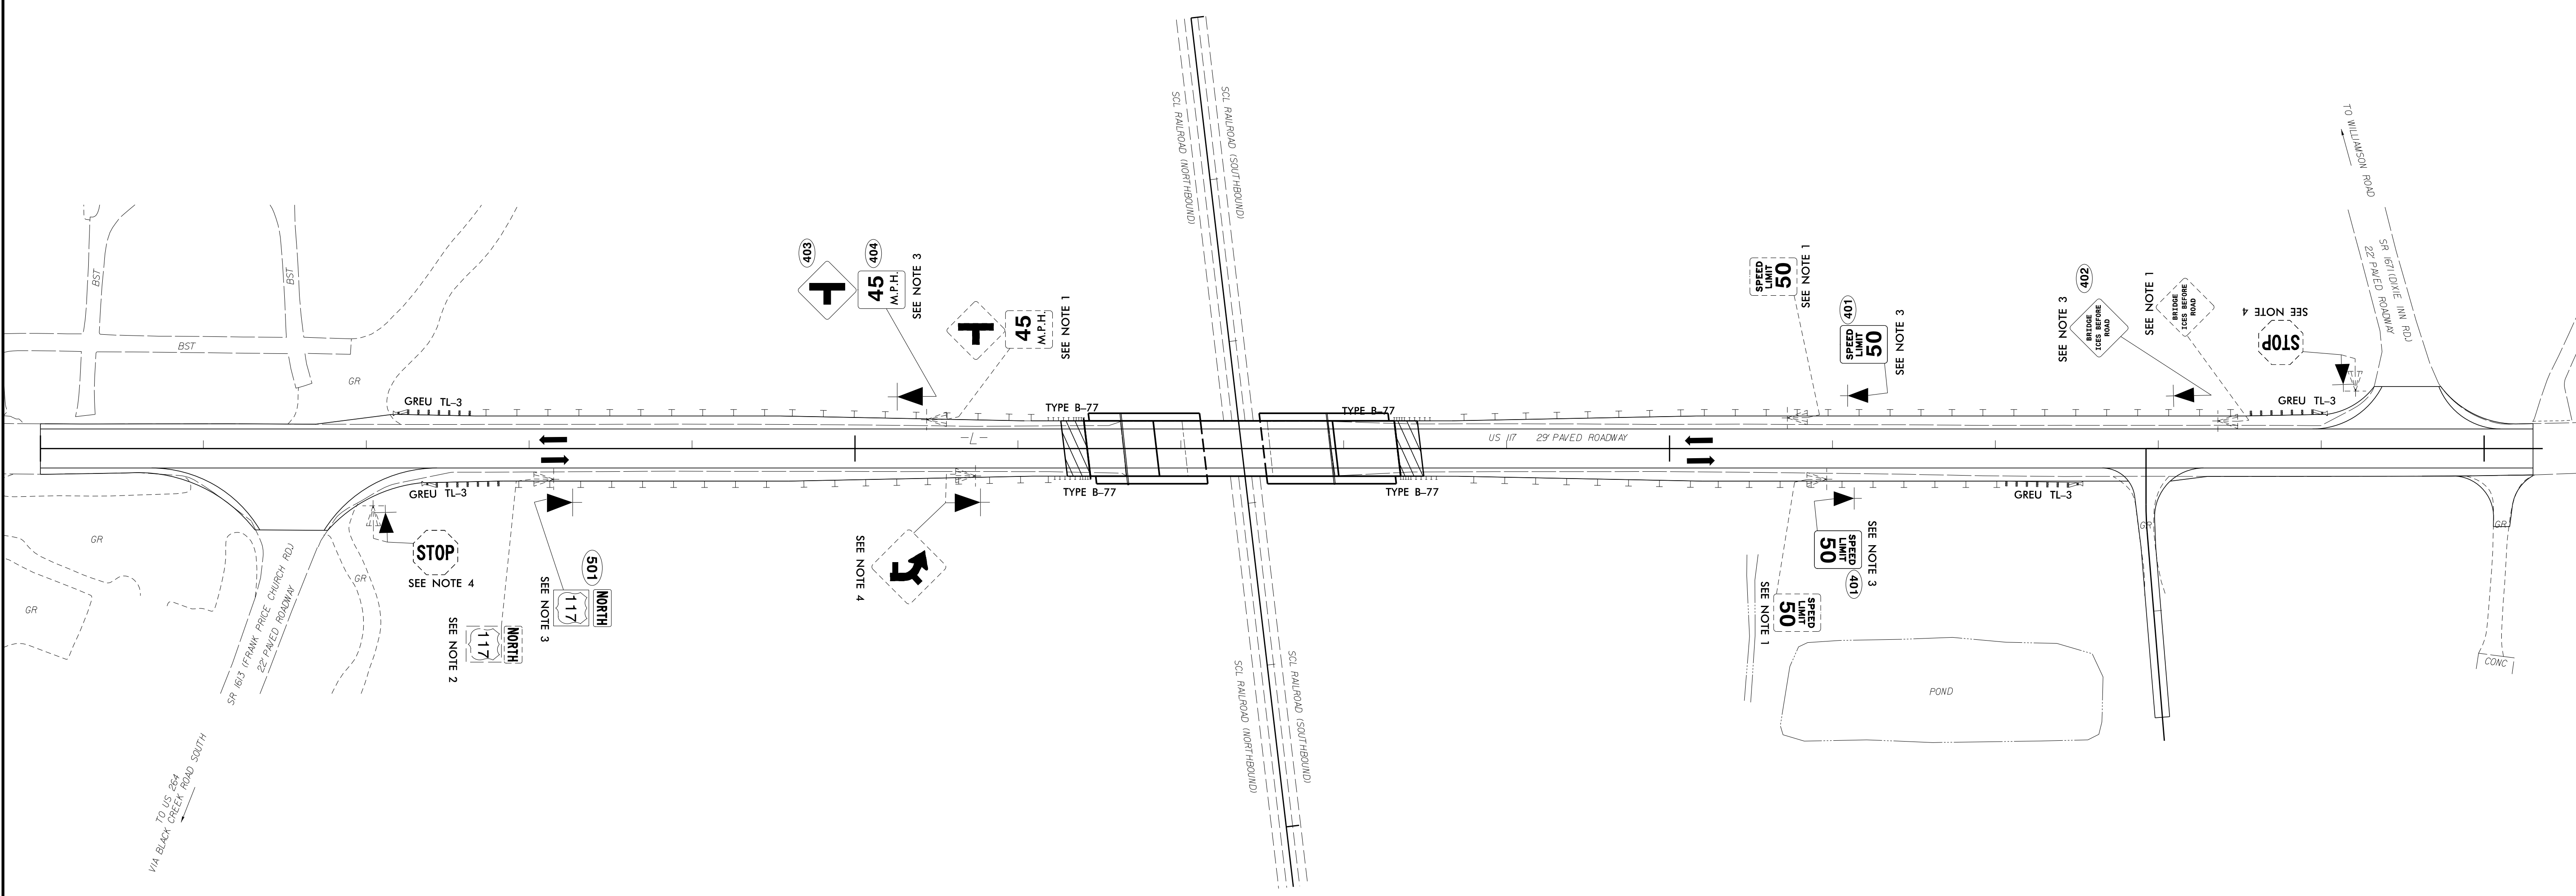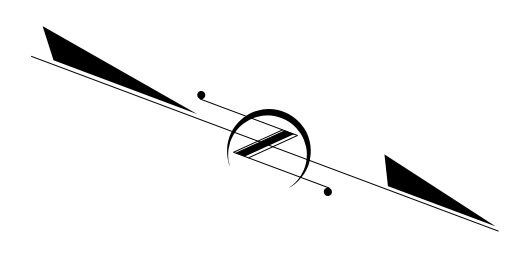


PROJECT NOTES

1	DISPOSAL OF SIGN SYSTEM, U-CHANNEL
2	DISPOSAL OF SUPPORT, U-CHANNEL
3	SIGN ERECTION, TYPE D, E, AND F
4	SIGN ERECTION, RELOCATE SIGN TYPE E

APPROVED: _____
 DATE: 5/7/2020

SEAL

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

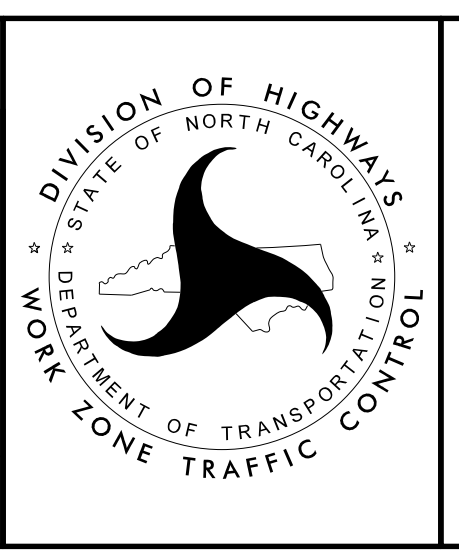

**EXISTING &
PROPOSED SIGNS**

3/30/2020
 W:\2018\2516101945.22 B-5666\TrafficControl\TCP\B5666_SGN_04.dgn
 User: bryan.houch

KCI Engineers • Planners • Scientists • Construction Managers
 4505 Falls of Neuse Road, Suite 400
 Raleigh, NC 27609-4270
 Phone (919) 783-9214 • Fax (919) 783-9266