
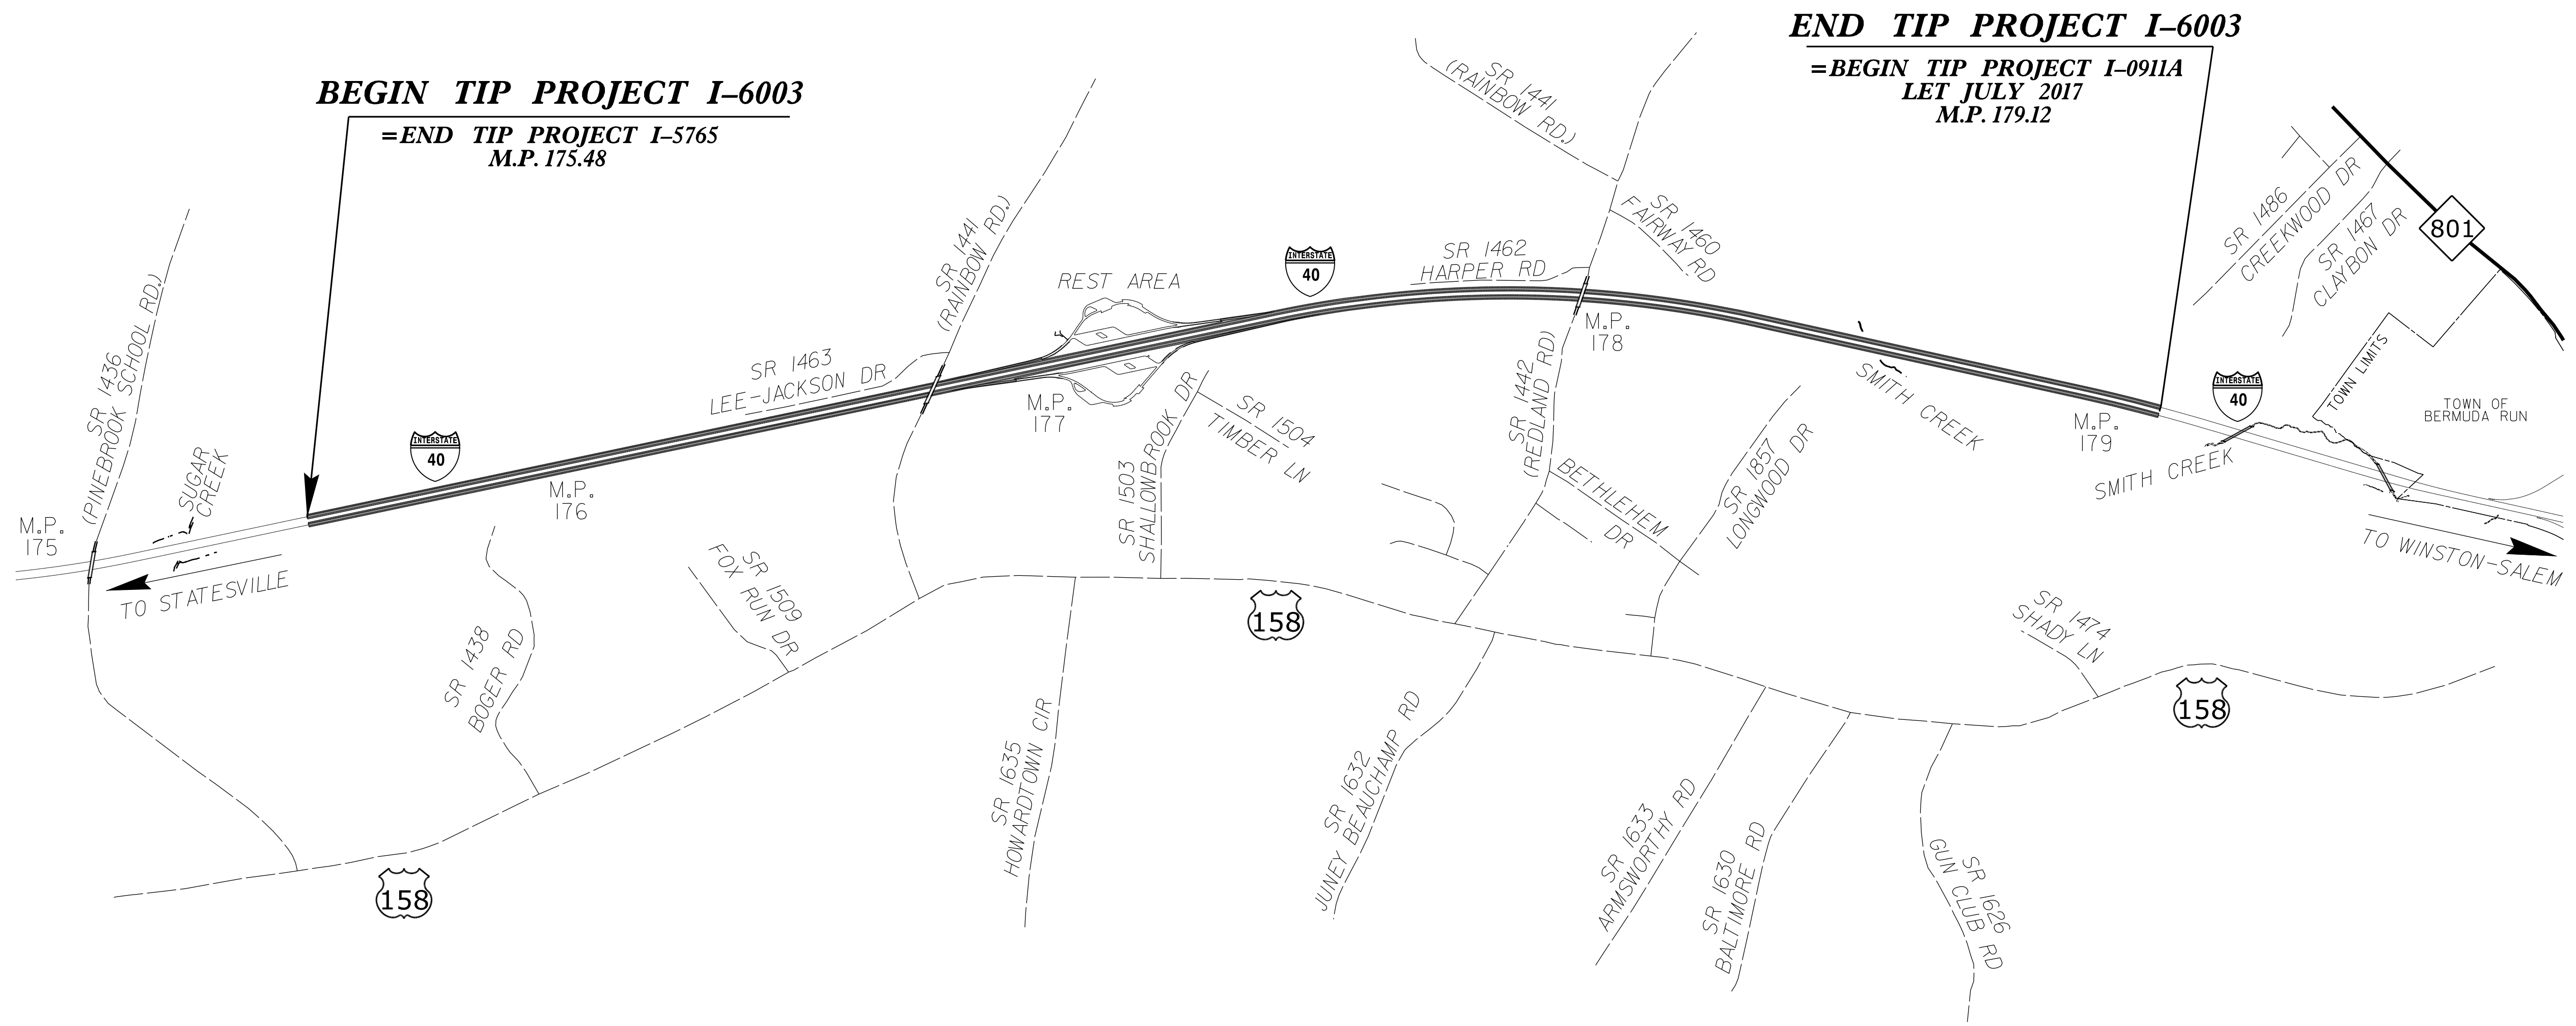


PROJECT REFERENCE NO.		SHEET NO.	
I-6003		4	
RW SHEET NO.			
ROADWAY DESIGN ENGINEER		HYDRAULICS ENGINEER	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED			

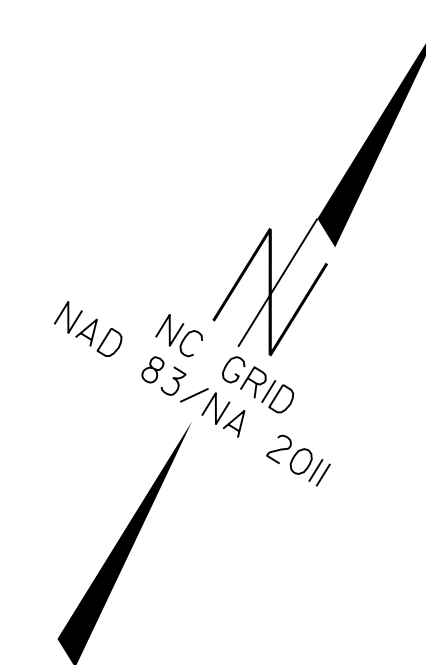

BEGIN TIP PROJECT I-6003

=END TIP PROJECT I-5765
M.P. 175.48

END TIP PROJECT I-6003

=BEGIN TIP PROJECT I-0911A
LET JULY 2017
M.P. 179.12

I-40 East Bound & West Bound
Complete concrete slab repairs
Mill travel lanes at 3" depth
Pave back with 3" S9.5D.
Mill asphalt shoulders at 1-1/2" depth
Pave back with 1-1/2" S9.5D.
MAINTAIN EXISTING CLEARANCE
AT ALL BRIDGES

Rest Area Ramps (Asphalt Portion Only)
East Bound & West Bound
Mill travel lanes at 3" depth
Pave back with 3" S9.5D.
Mill asphalt shoulders at 1-1/2" depth
Pave back with 1-1/2" S9.5D.

NOTE: SEE TMP PLANS FOR DETAILED CONSTRUCTION SEQUENCE

REVISIONS

I4-JUL-2021 11:04
 S:\Projects\Development\TIP-Projects\I-6003-40Rehab-Davie\Roadway\I6003_ddc_psh_4.dgn
 8/17/99