

WBS ELEMENT SHEET NO.

13


2022CPT.08.11.10631
2022CPT.08.11.20631

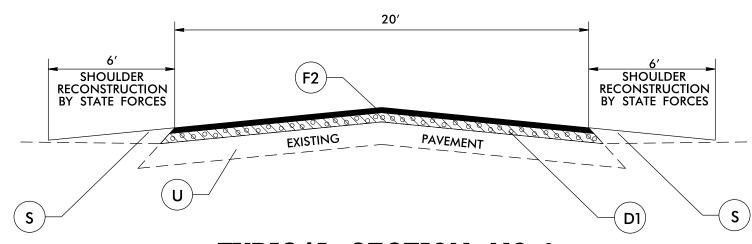

## TYPICAL SECTION NO. 3 NOTE: USE TYPICAL NO. 3 FOR MAP #14 FROM PUTNAM GLENDON RD FOR 800'

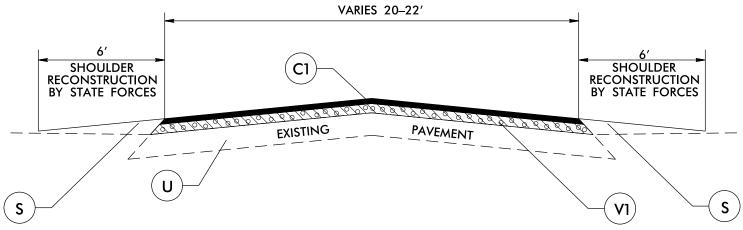

## TYPICAL SECTION NO. 4

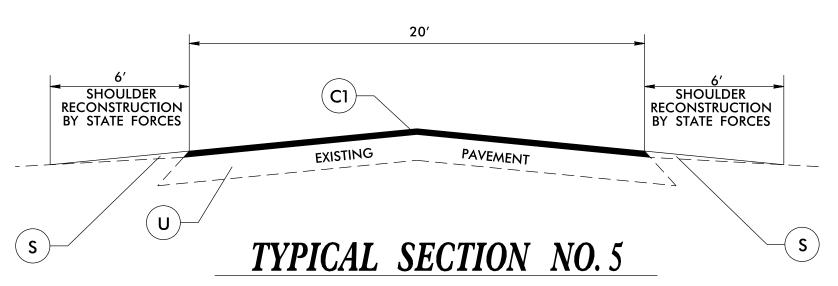

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE \$9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE \$9.5B, AT AN AVERAGE RATE OF 220 LBS. PER SQ. YD.
C3	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE \$9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D1	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 119.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
E1	PROP. APPROX. 4.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
F1	PROP. ASPHALT SURFACE TREATMENT, MATCOAT, #67 STONE.
F2	PROPOSED ASPHALT SURFACE TREATMENT, DOUBLE SEAL
S	AGGREGATE SHOULDER BORROW (BY STATE FORCES)
U	EXISTING PAVEMENT.
V1	MILLING 1.5" IN DEPTH
V2	TRENCHING FOR BASE COURSE (SEE S.P.)