
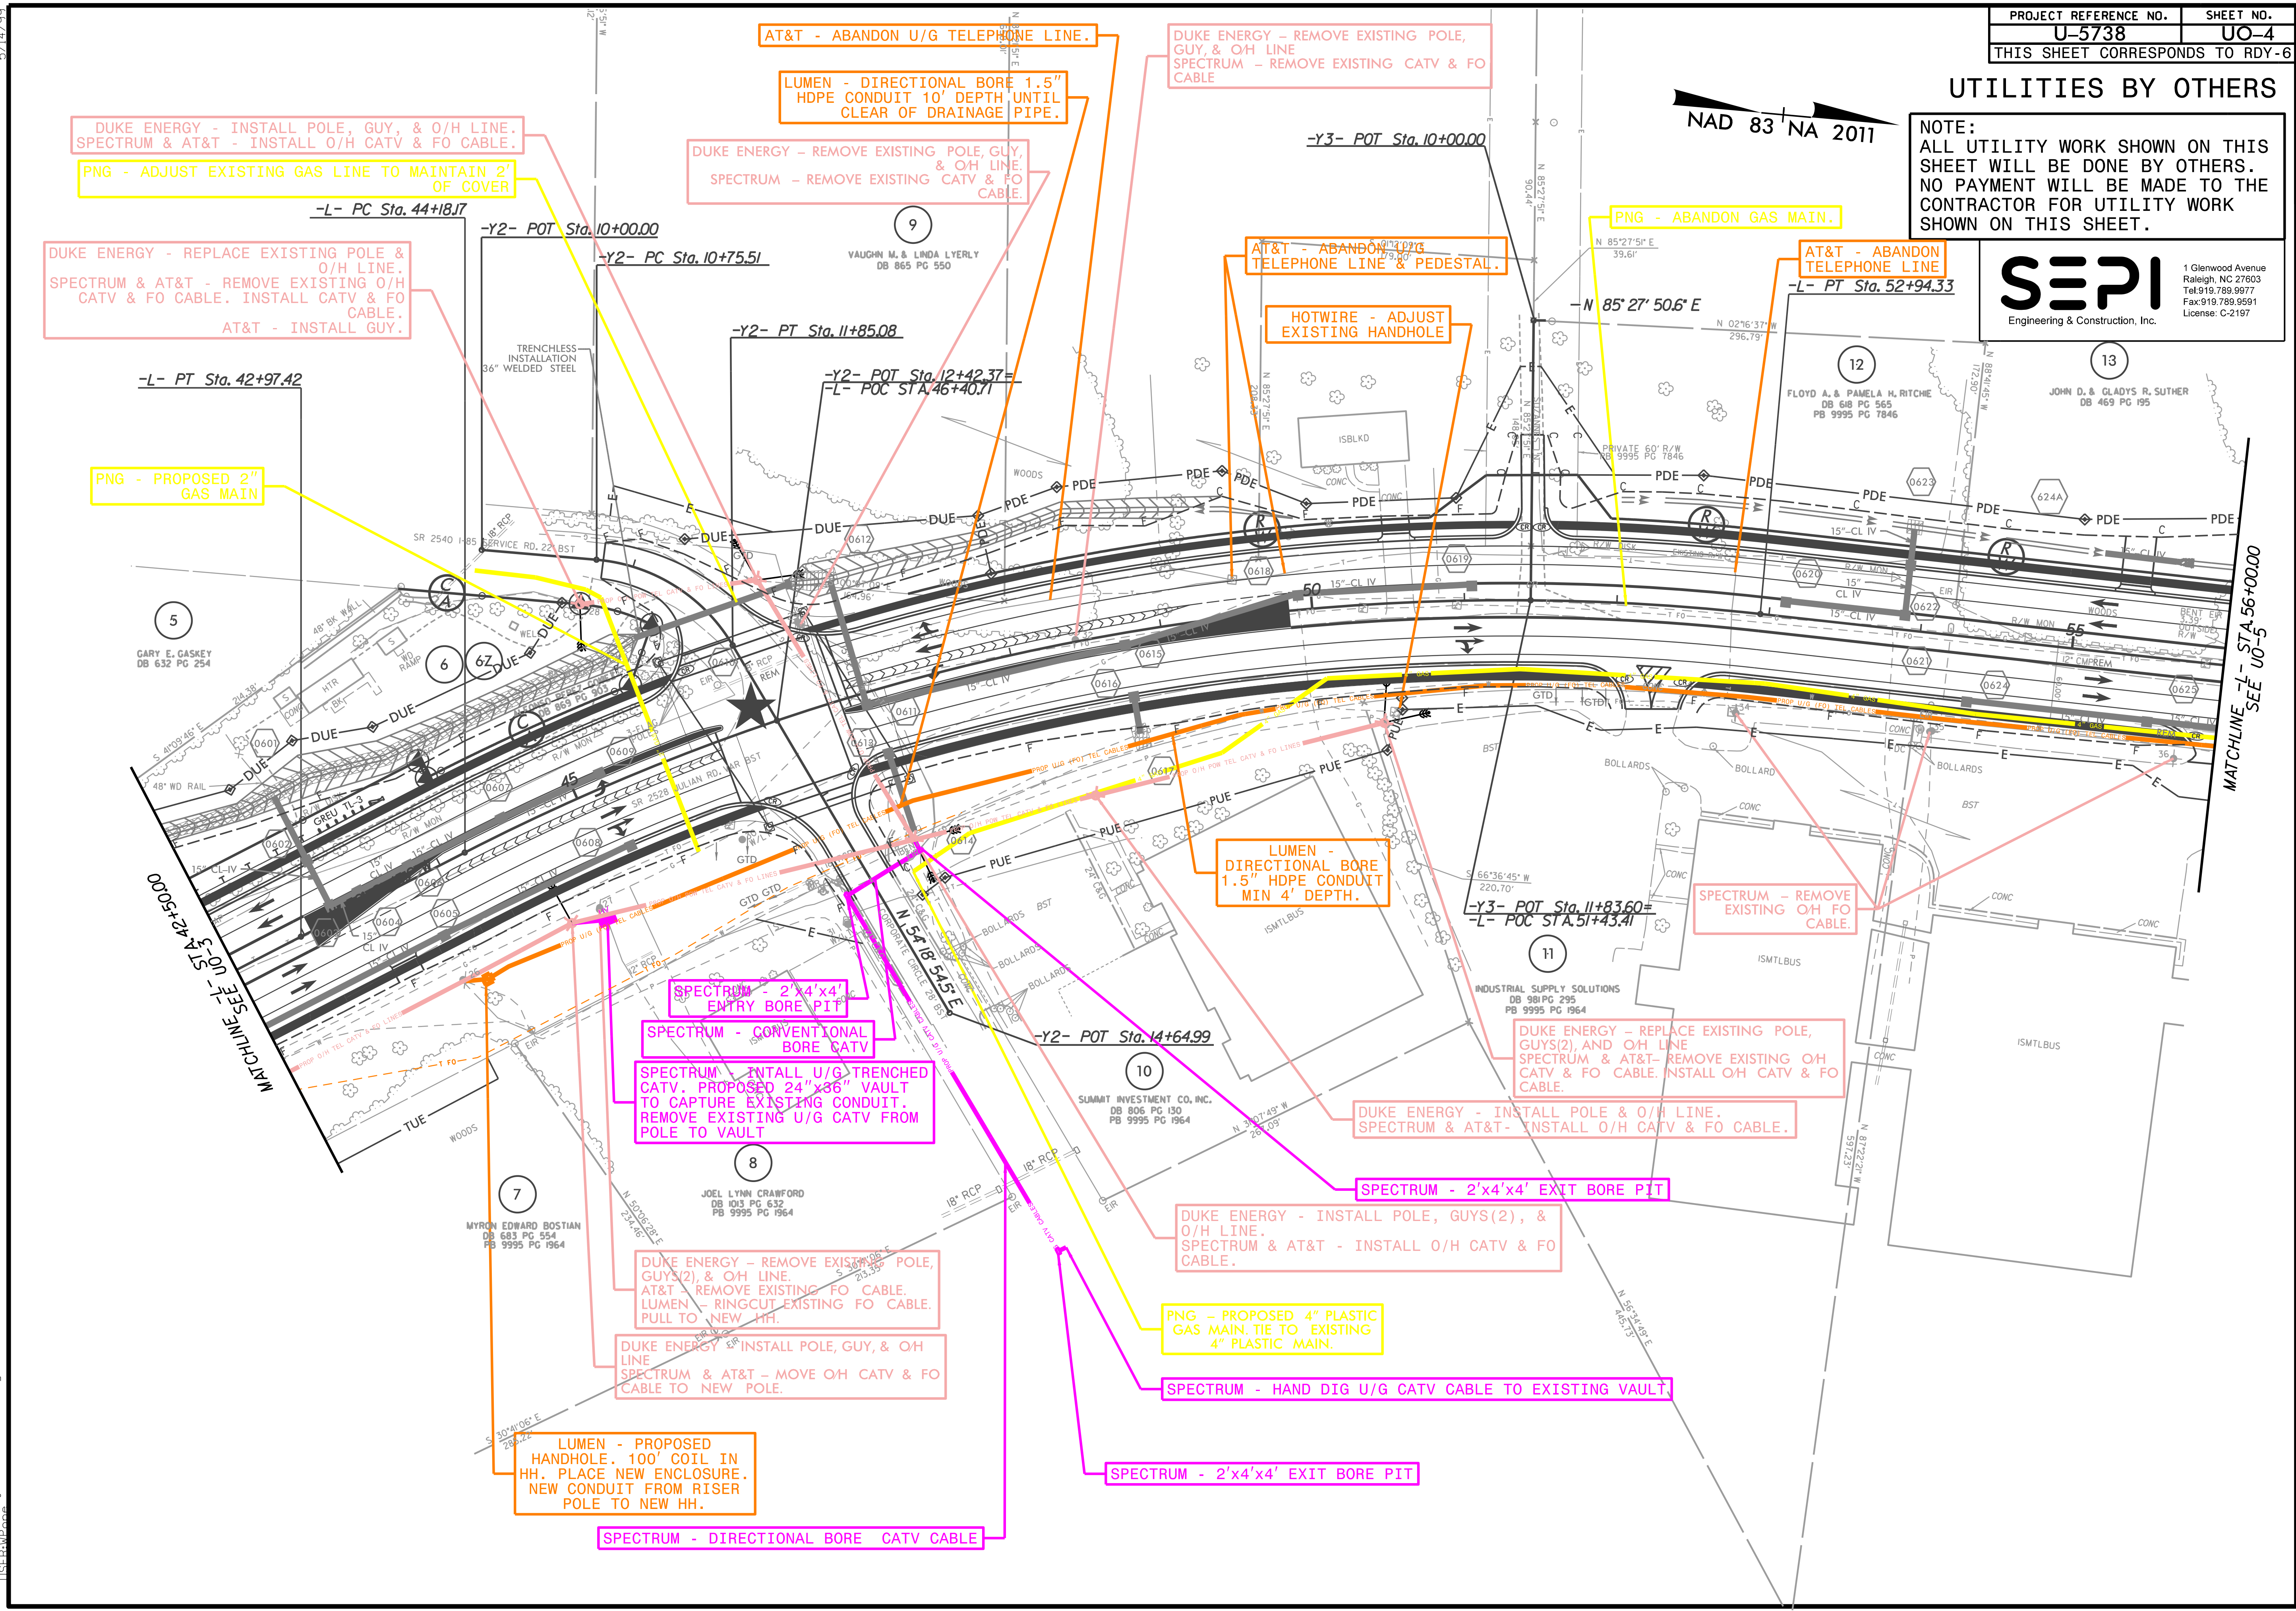


UTILITIES BY OTHERS

NOTE:
ALL UTILITY WORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS. NO PAYMENT WILL BE MADE TO THE CONTRACTOR FOR UTILITY WORK SHOWN ON THIS SHEET.

SEPI
Engineering & Construction, Inc.

1 Glenwood Avenue
Raleigh, NC 27603
Tel: 919.789.9977
Fax: 919.789.9591
License: C-2197

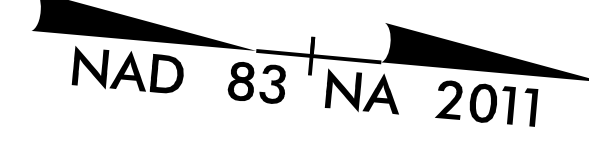

DUKE ENERGY - INSTALL POLE, GUY, & O/H LINE. SPECTRUM & AT&T - INSTALL O/H CATV & FO CABLE.

PNG - ADJUST EXISTING GAS LINE TO MAINTAIN 2' OF COVER

DUKE ENERGY - REPLACE EXISTING POLE & O/H LINE. SPECTRUM & AT&T - REMOVE EXISTING O/H CATV & FO CABLE. INSTALL CATV & FO CABLE. AT&T - INSTALL GUY.

PNG - PROPOSED 2" GAS MAIN

AT&T - ABANDON U/G TELEPHONE LINE.

LUMEN - DIRECTIONAL BORE 1.5" HDPE CONDUIT 10' DEPTH UNTIL CLEAR OF DRAINAGE PIPE.

DUKE ENERGY - REMOVE EXISTING POLE, GUY, & O/H LINE. SPECTRUM - REMOVE EXISTING CATV & FO CABLE.

DUKE ENERGY - REMOVE EXISTING POLE, GUY, & O/H LINE. SPECTRUM - REMOVE EXISTING CATV & FO CABLE

AT&T - ABANDON U/G TELEPHONE LINE & PEDESTAL.

HOTWIRE - ADJUST EXISTING HANDHOLE

PNG - ABANDON GAS MAIN.

AT&T - ABANDON TELEPHONE LINE

LUMEN - DIRECTIONAL BORE 1.5" HDPE CONDUIT MIN 4' DEPTH.

SPECTRUM - REMOVE EXISTING O/H FO CABLE.

SPECTRUM - 2'x4'x4' ENTRY BORE PIT

SPECTRUM - CONVENTIONAL BORE CATV

SPECTRUM - INTALL U/G TRENCHED CATV. PROPOSED 24"x36" VAULT TO CAPTURE EXISTING CONDUIT. REMOVE EXISTING U/G CATV FROM POLE TO VAULT

DUKE ENERGY - REPLACE EXISTING POLE, GUYS(2), AND O/H LINE. SPECTRUM & AT&T - REMOVE EXISTING O/H CATV & FO CABLE. INSTALL O/H CATV & FO CABLE.

DUKE ENERGY - INSTALL POLE & O/H LINE. SPECTRUM & AT&T - INSTALL O/H CATV & FO CABLE.

SPECTRUM - 2'x4'x4' EXIT BORE PIT

DUKE ENERGY - INSTALL POLE, GUYS(2), & O/H LINE. SPECTRUM & AT&T - INSTALL O/H CATV & FO CABLE.

PNG - PROPOSED 4" PLASTIC GAS MAIN. TIE TO EXISTING 4" PLASTIC MAIN.

SPECTRUM - HAND DIG U/G CATV CABLE TO EXISTING VAULT

SPECTRUM - 2'x4'x4' EXIT BORE PIT

DUKE ENERGY - REMOVE EXISTING POLE, GUYS(2), & O/H LINE. AT&T REMOVE EXISTING FO CABLE. LUMEN - RINGCUT EXISTING FO CABLE. PULL TO NEW HH.

DUKE ENERGY - INSTALL POLE, GUY, & O/H LINE. SPECTRUM & AT&T - MOVE O/H CATV & FO CABLE TO NEW POLE.

LUMEN - PROPOSED HANDHOLE. 100' COIL IN HH. PLACE NEW ENCLOSURE. NEW CONDUIT FROM RISER POLE TO NEW HH.

SPECTRUM - DIRECTIONAL BORE CATV CABLE

5/14/99
I:\2008\Projects\U5738_Ut_U04.dgn

MATCHLINE SEE UO-5