PROJECT REFERENCE NO.	SHEET NO.
W-5701B	2C-5

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ROADWAY DETAIL DRAWING FOR

CONCRETE JUNCTION BOX

(WITH OPTIONAL MANHOLE)
UP TO 30′ IN HEIGHT

SHEET 1 OF 1

840D31

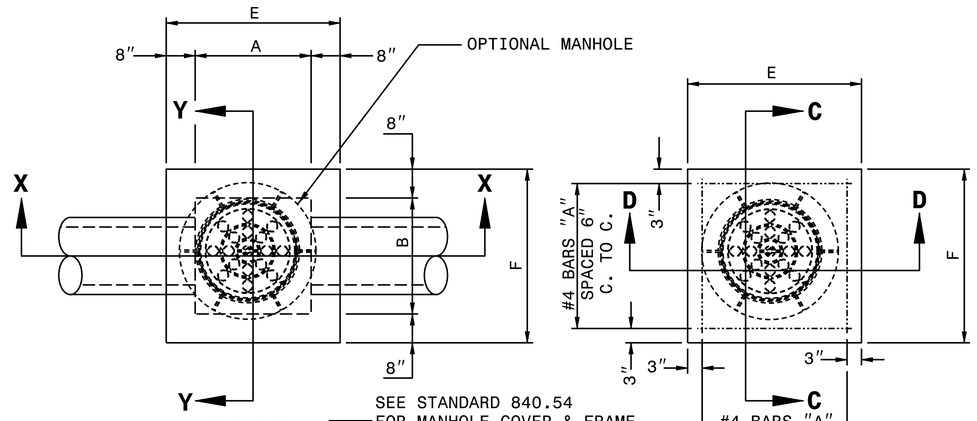

PLAN

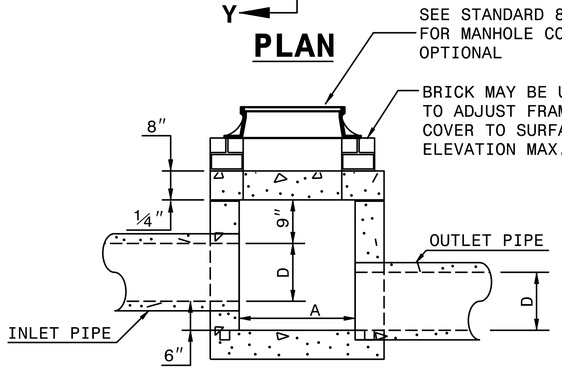

SECTION X-X

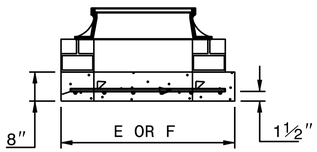

SECTION C-C OR D-D

GENERAL NOTES:

CHAMFER ALL EXPOSED CORNERS 1″.

USE CLASS "B" CONCRETE THROUGHOUT.

OPTIONAL CONSTRUCTION - MONOLITHIC POUR, 2″ KEYWAY, OR #4 BAR DOWELS AT 12″ CENTERS AS DIRECTED BY THE ENGINEER.

USE FORMS TO CONSTRUCT THE BOTTOM SLAB.

IF REINFORCED CONCRETE PIPE IS SET IN BASE SLAB OF BOX, ADD TO BASE AS SHOWN ON STANDARD NO. 840.00.

PROVIDE ALL JUNCTION BOXES OVER 3′-6″ IN DEPTH WITH STEPS 12″ ON CENTERS IN ACCORDANCE WITH STD. NO. 840.66.

ADJUST THE STEEL, CONCRETE AND BRICK MASONRY QUANTITIES TO INCLUDE THE ADDITION OF THE MANHOLE (I.E. DIAGONAL BARS SHORTENED AROUND OPENING IN TOP SLAB, ADDITIONAL VARIABLE HEIGHT BRICK MASONRY, OPENING IN TOP SLAB.)

MAX. DEPTH OF THIS STRUCTURE FROM TOP OF BOTTOM SLAB TO TOP ELEVATION IS 25 FEET.



DOWEL

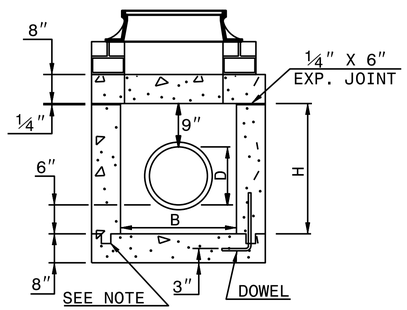

SECTION Y-Y

DIMENSIONS AND QUANTITIES FOR CONCRETE JUNCTION BOXES

DIMENSIONS OF BOX AND PIPE				REINFORCEMENT BARS "A"		TOP SLAB DIMENSIONS		CUBIC YARDS IN BOX			TOTAL QUANTITIES BOX AND SLABS		DEDUCTIONS FOR ONE PIPE CU.YDS.	
PIPE	SPAN	WIDTH	HEIGHT					TOP SLAB	BOTTOM SLAB	WALL/ FT. OF HT.	LBS. REINF	CU. YDS. MIN. "H"	C.S.	R.C.
D	A	B	H	NO.	LENGTH	E	F							
12″	2′-0″	2′-0″	2′-3″	12	2′-9″	3′-0″	3′-0″	0.222	0.222	0.246	22	0.998	0.015	0.024
15″	2′-3″	2′-3″	2′-6″	12	3′-0″	3′-3″	3′-3″	0.261	0.261	0.271	24	1.200	0.023	0.036
18″	2′-6″	2′-6″	2′-9″	14	3′-3″	3′-6″	3′-6″	0.302	0.302	0.295	30	1.416	0.033	0.049
24″	3′-0″	3′-0″	3′-3″	16	3′-9″	4′-0″	4′-0″	0.394	0.394	0.344	40	1.907	0.059	0.085
30″	3′-6″	3′-6″	3′-9″	18	4′-3″	4′-6″	4′-6″	0.499	0.499	0.394	51	2.474	0.092	0.127
36″	4′-0″	4′-0″	4′-3″	20	4′-9″	5′-0″	5′-0″	0.616	0.616	0.443	64	3.114	0.132	0.178
42″	4′-6″	4′-6″	4′-9″	22	5′-3″	5′-6″	5′-6″	0.745	0.745	0.492	77	3.828	0.180	0.243
48″	5′-4″	5′-4″	5′-3″	26	6′-3″	6′-4″	6′-4″	0.988	0.988	0.541	111	4.819	0.235	0.317
54″	5′-10″	5′-10″	5′-9″	28	6′-7″	6′-10″	6′-10″	1.150	1.150	0.591	126	5.696	0.297	0.401
60″	6′-6″	6′-6″	6′-3″	30	7′-3″	7′-6″	7′-6″	1.386	1.386	0.640	145	6.770	0.367	0.495
66″	7′-1″	7′-1″	6′-9″	32	7′-10″	8′-1″	8′-1″	1.609	1.609	0.689	169	7.870	0.444	0.589

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ROADWAY DETAIL DRAWING FOR

CONCRETE JUNCTION BOX

(WITH OPTIONAL MANHOLE)
UP TO 30′ IN HEIGHT

SHEET 1 OF 1

840D31

NORTH CAROLINA PROFESSIONAL SEAL 33144 ENGINEER NICOLE M ACKLEY
DocuSigned by: Nicole M Ackley 5884323D34164C5...
1/9/2023

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

CONTRACT STANDARDS AND DEVELOPMENT UNIT
Office 919-707-6950 FAX 919-250-4119

SEE PLATE FOR TITLE

ORIGINAL BY: J. HOWERTON DATE: 12/30/19
MODIFIED BY: _____ DATE: _____
CHECKED BY: _____ DATE: _____
FILE SPEC.: jhowerton/840d31 up to 30ft of fill.dgn

$$$$SYSTIME$$$$
$$$$USERNAME$$$$ON $$$$$$$$$$$$$$$$$$$$