


TOTAL BILL OF MATERIAL														
BRIDGE NO.	INCIDENTAL MILLING	ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B	ASPHALT BINDER FOR PLANT MIX	GROOVING BRIDGE FLOORS	CLASS AA CONCRETE	POLLUTION CONTROL	CLASS II SURFACE PREPARATION	LATEX MODIFIED CONCRETE OVERLAY	PLACING & FINISHING OF LATEX MODIFIED CONCRETE OVERLAY	CONCRETE REPAIRS	SHOTCRETE REPAIRS	EPOXY RESIN INJECTION	CLEANING AND PAINTING EXISTING WEATHERING STEEL FOR BRIDGE NO...	CLEANING AND REPAINTING OF BRIDGE NO...
	SQ. YDS.	TON	TON	SQ. FT.	CU. YD.	LUMP SUM	SQ. YDS.	CU. YDS.	SQ. YDS.	CU. FT.	CU. FT.	LN. FT.	LUMP SUM	LUMP SUM
190009	378.0	40	5	10,227	17.5	LUMP SUM	67.1	85.2	1,361.0	-	145.6	1.5	-	LUMP SUM
190010	445.0	40	5	14,540	26.8	LUMP SUM	-	111.1	1,776.0	2.0	46.4	1.3	LUMP SUM	-
TOTAL	823.0	80	10	24,767	44.3	LUMP SUM	67.1	196.3	3,137.0	2.0	192.0	2.8	LUMP SUM	LUMP SUM

TOTAL BILL OF MATERIAL CONTINUED													
BRIDGE NO.	PAINTING CONTAINMENT FOR BRIDGE NO...	FOAM JOINT SEALS FOR PRESERVATION	ELASTOMERIC CONCRETE FOR PRESERVATION	REPAIRS TO PRESTRESSED CONCRETE GIRDERS	BEAM REPAIR PLATING	BRIDGE JOINT DEMOLITION	EPOXY COATING	EPOXY COATING CONCRETE GIRDER ENDS	LINK SLAB FOR PRESERVATION	HYDRO-DEMOLITION OF BRIDGE DECK	SCARIFYING BRIDGE DECK	CLEANING & PAINTING EXISTING BEARINGS WITH HIGH RATIO CALCIUM SULFONATE	STEEL BEARING KEEPER ANGLER ASSEMBLY
	LUMP SUM	LN. FT.	CU. FT.	CU. FT.	LBS.	SQ. FT.	SQ. FT.	SQ. FT.	SQ. FT.	SQ. YDS.	SQ. YDS.	EACH	EACH
190009	LUMP SUM	68.0	17.0	-	96.1	68.0	476.0	-	782.0	1,361.0	1,361.0	50	5
190010	LUMP SUM	160.0	40.0	1.1	-	160.0	500.0	698.7	1,028.0	1,776.0	1,776.0	-	-
TOTAL	LUMP SUM	228.0	57.0	1.1	96.1	228.0	976.0	698.7	1,810.0	3,137.0	3,137.0	50	5

PROJECT NO. 15BPR.61  
CHEROKEE COUNTY  
BRIDGE NO. 190009, 190010

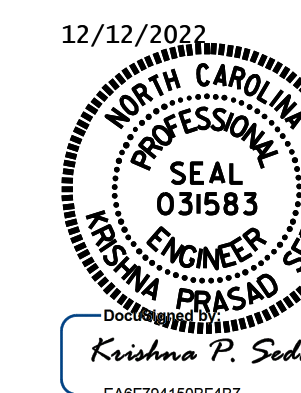

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH  
**TOTAL  
BILL OF MATERIAL**

DRAWN BY : A. SORSENGINH DATE : 6/2022  
CHECKED BY : S. AGUILAR HERNANDEZ DATE : 6/2022

DOCUMENT NOT CONSIDERED  
FINAL UNLESS ALL  
SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-2
1			3			TOTAL SHEETS
2			4			2