

PROJECT REFERENCE NO. B-5721 EC-02 R/W SHEET NO.

SKIMMER BASIN WITH BAFFLES DETAIL

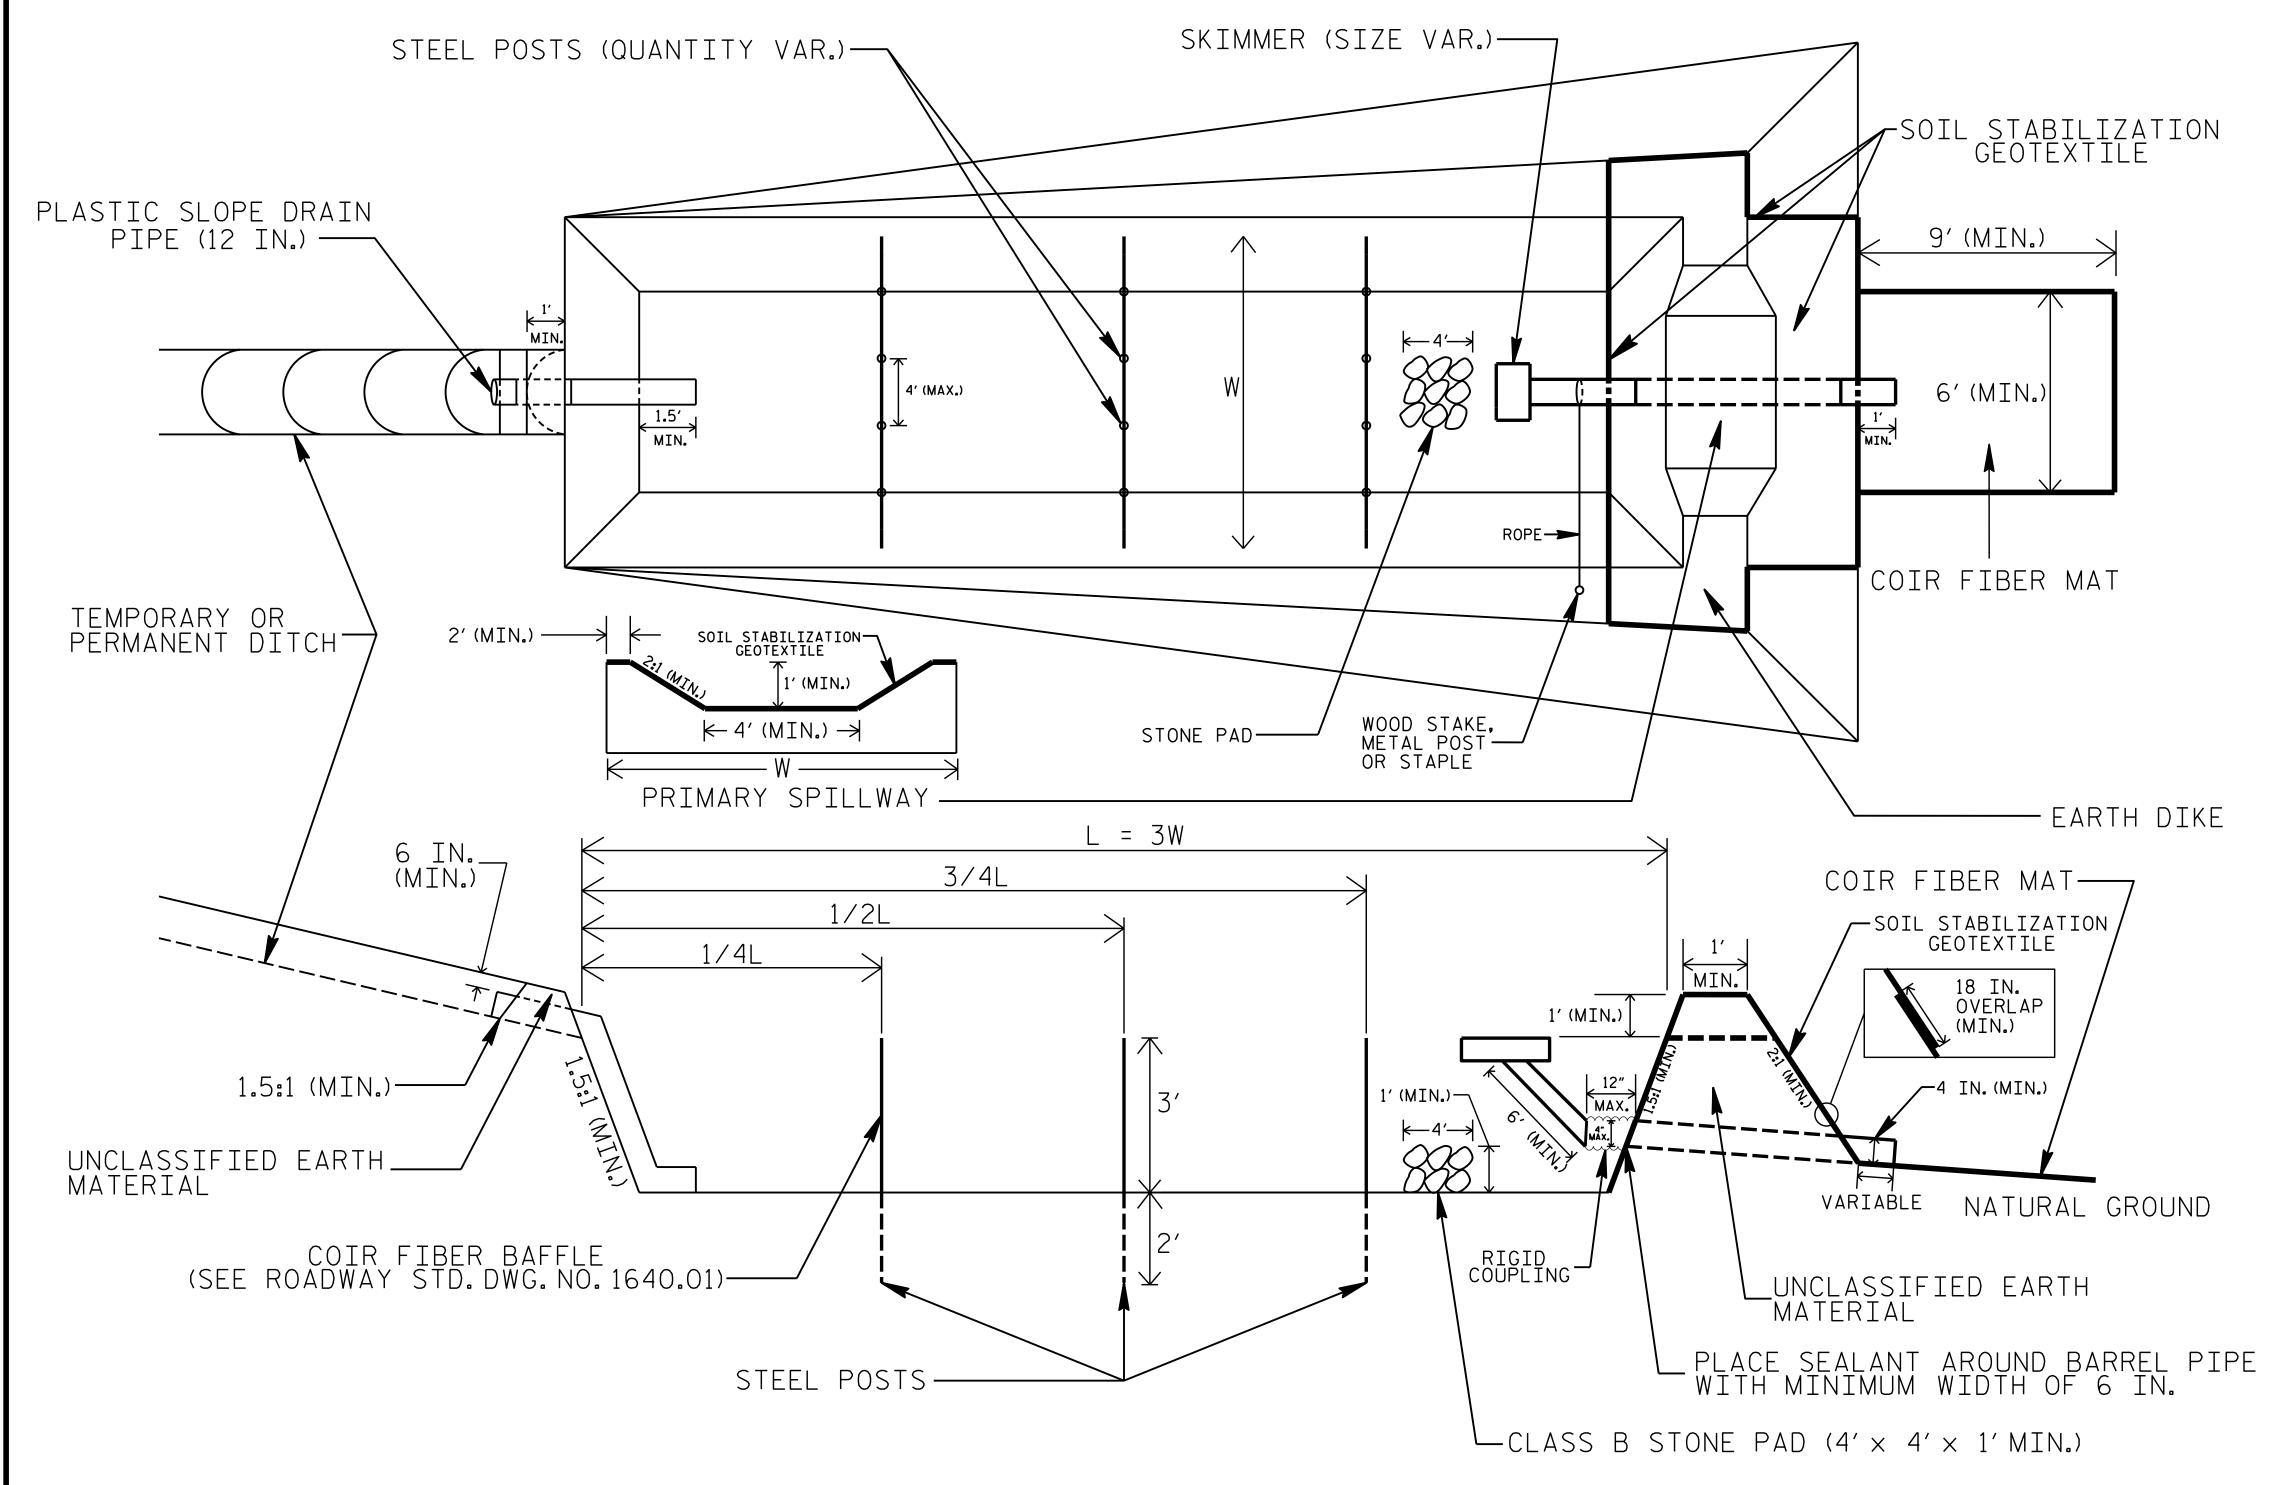

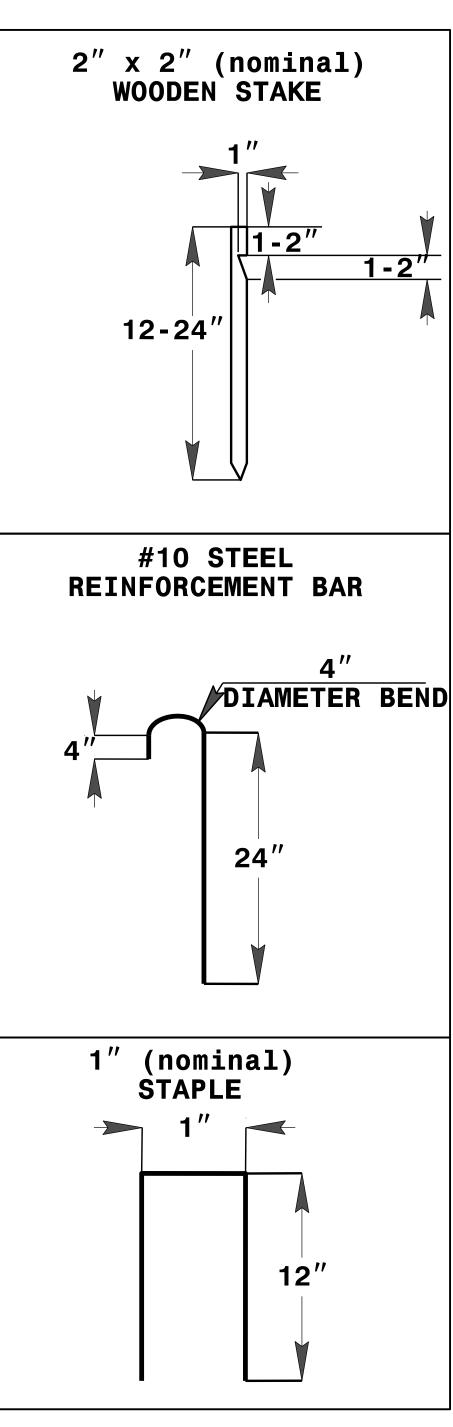

COIR FIBER MAT ANCHOR OPTIONS

NOTES

- 1. SEED AND PLACE MATTING FOR EROSION CONTROL ON INTERIOR AND EXTERIOR SIDESLOPES.
- 2. LIMIT EARTH DIKE HEIGHT TO 5 FT.

- 3. FOR BASIN DEPTH OF 3 FT., THE MINIMUM BASIN WIDTH SHALL BE 9 FT. 4. DETERMINE PRIMARY SPILLWAY WEIR LENGTH (FT.) USING Q/O.8, WHERE Q IS FLOW RATE (CFS) INTO BASIN. 5. PLASTIC SLOPE DRAIN PIPE AT INLET OF BASIN MAY BE REPLACED BY FILTRATION GEOTEXTILE OR TARP AS DIRECTED.
- 6. SOIL STABILIZATION GEOTEXTILE FOR PRIMARY SPILLWAY SHALL BE ONE CONTINUOUS PIECE OF MATERIAL OR OVERLAPPED 18 IN. (MIN.).