

## ECONOLITE ASC/3-2070 PED 3 PROGRAMMING ASSIGNMENT DETAIL

*(program controller as shown)*

1. From Main Menu select 6. DETECTORS
2. From DETECTOR Submenu select 3. PED DETECTOR INPUT ASSIGNMENT

PED DET PHASE ASSIGNMENT MODE: NTCIP																
PHASE	1	2	3	4	5	6	7	8								
DETECTOR	0	2	8	4	0	6	0	0								
PHASE	9	10	11	12	13	14	15	16								
DETECTOR	0	0	0	0	0	0	0	0								

← NOTICE PED DETECTOR 8  
ASSIGNED TO PHASE 3

1. From Main Menu select 1. CONFIGURATION
2. From CONFIGURATION Submenu select 3. LOAD SW ASSIGN

LD SWITCH ASSIGN										
PHASE	DIMMING	---FLASH---								
/OVLP	TYPE	R	Y	G	D	PWR	AUT	TGR		
1	1	V	.	.	.	+	A	R	X	
2	2	V	.	.	.	+	A	Y	.	
3	3	V	.	.	.	+	A	R	X	
4	4	V	.	.	.	+	A	R	.	
5	5	V	.	.	.	-	A	R	.	
6	6	V	.	.	.	-	A	Y	X	
7	7	V	.	.	.	-	A	R	.	
8	8	V	.	.	.	-	A	R	X	
9	1	O	.	.	.	+	A	R	X	
10	2	O	.	.	.	+	A	R	X	
11	3	O	.	.	.	-	A	R	.	
12	4	O	.	.	.	-	A	R	.	
13	2	P	.	.	.	+	A	.	.	
14	4	P	.	.	.	-	A	.	.	
15	6	P	.	.	.	+	A	.	.	
16	3	P	.	.	.	-	A	.	.	


NOTICE PHASE 3 PED  
ASSIGNED TO LD SWITCH 16 →

## COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

THIS ELECTRICAL DETAIL IS FOR  
THE SIGNAL DESIGN: 06-0236  
DESIGNED: December 2022  
SEALED: 1/6/2023  
REVISED: N/A

Electrical Detail-Sheet 2 of 2

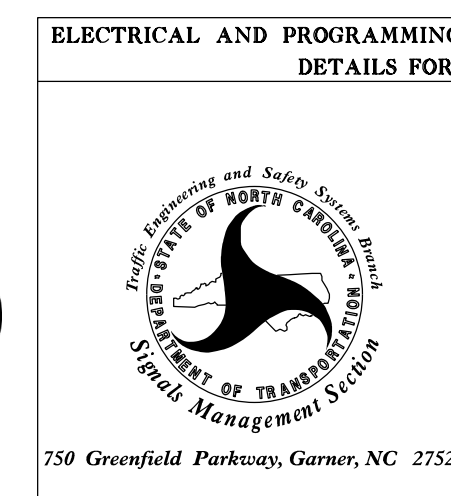

ELECTRICAL AND PROGRAMMING DETAILS FOR:		NC 24-87 (Bragg Blvd) at Sycamore Dairy Rd/Carol St	
Division 6	Cumberland County	Fayetteville	
PLAN DATE: December 2022	REVIEWED BY: M. L. Stygles		
PREPARED BY: J. Ma	REVIEWED BY:		
REVISIONS	INIT.	DATE	

DOCUMENT NOT CONSIDERED  
FINAL UNLESS ALL  
SIGNATURES COMPLETED

SEAL  
NORTH CAROLINA  
PROFESSIONAL  
ENGINEER  
J. Ma  
033108

DocuSigned by:  
Jianxin Ma  
1/6/2023

SIG. INVENTORY NO. 06-0236