


SEE "ICT" FOR THIS WORK

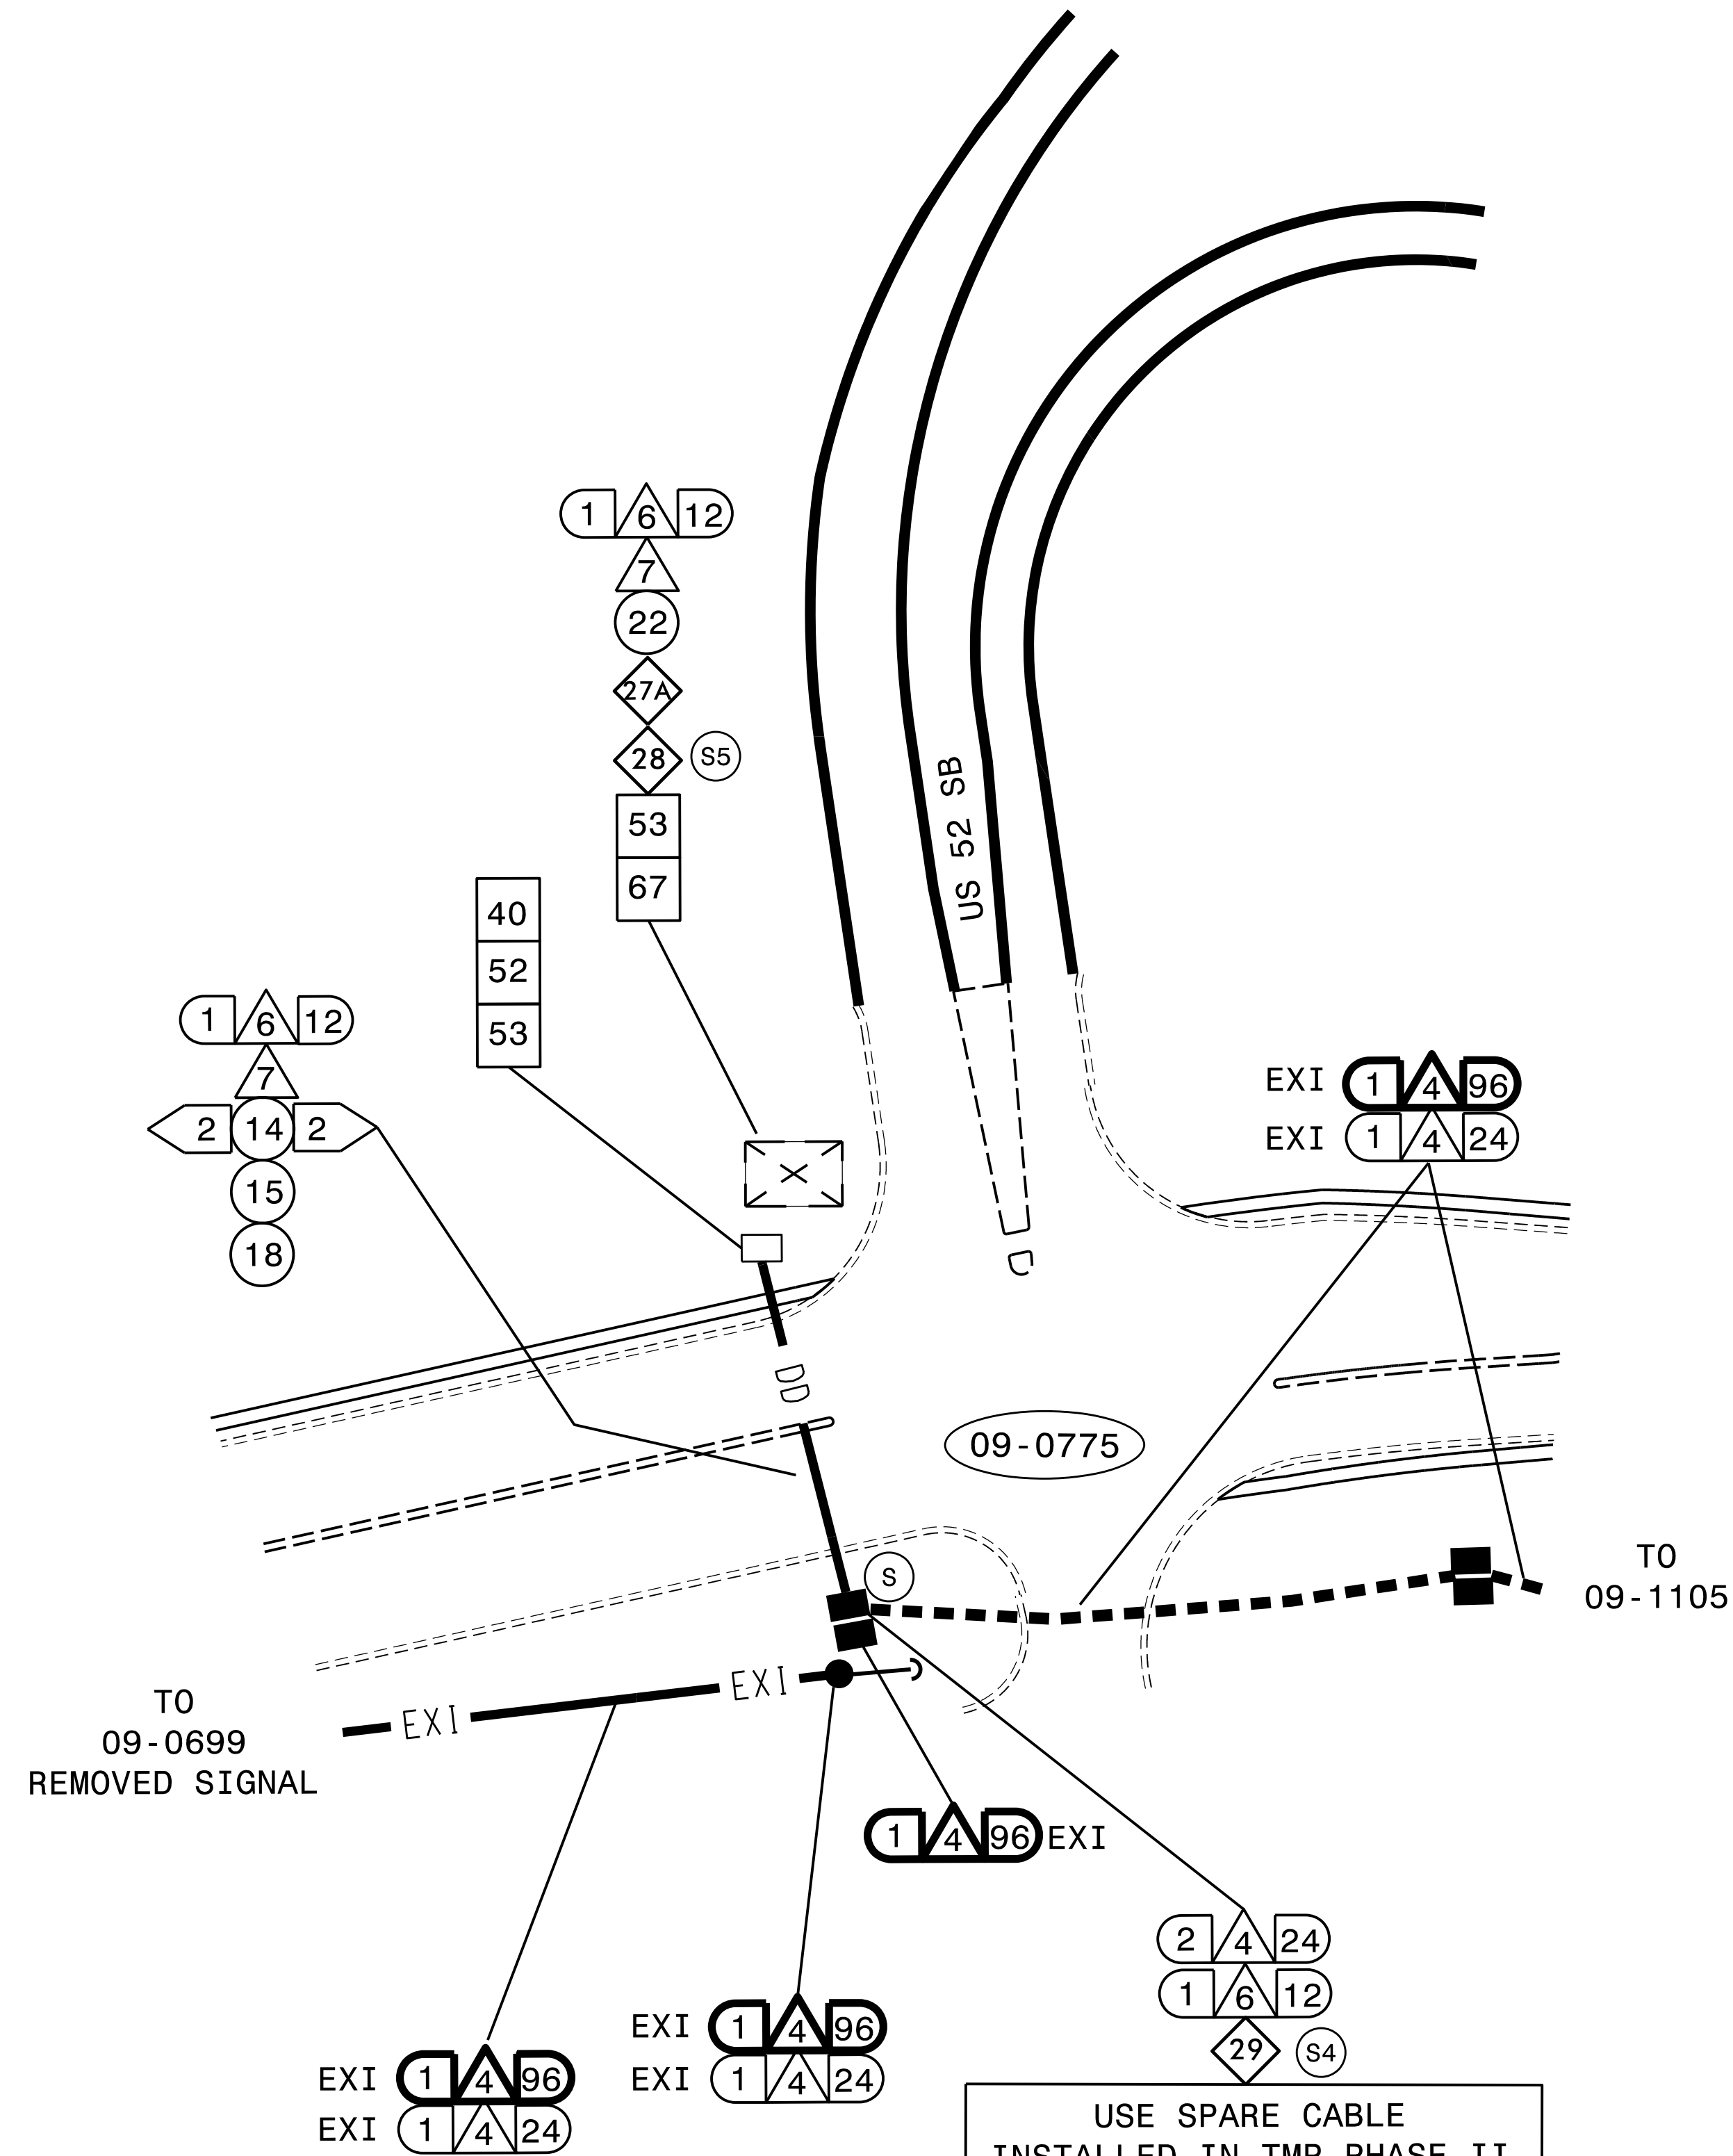

GENERAL CONSTRUCTION NOTES:

- FIVE (5) DAYS PRIOR TO BEGINNING WORK ON CONNECTING THE NEW SIGNAL INTO THE SYSTEM, CONTACT THE CITY OF WINSTON-SALEM'S SIGNAL SYSTEM SUPERVISOR, AT (336) 748-3228 TO ARRANGE FOR THE CITY TO PROGRAM THE NEW FIELD ETHERNET SWITCHES WITH THE NECESSARY NETWORK CONFIGURATIONS DATA, INCLUDING BUT NOT LIMITED TO: THE PROJECT IP ADDRESS, DEFAULT GATEWAY, SUBNET MASK AND VLAN ID INFORMATION. NOTIFY THE SIGNAL SYSTEM SUPERVISOR AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.
- PROVIDE AS-BUILT PLANS TO THE ENGINEER IF FINAL SPLICE ARRANGEMENTS DIFFERS FROM THE SUPPLIED SPLICE DETAILS.

PROJECT CONSTRUCTION NOTES:

- UNLESS OTHERWISE NOTED:
 - OVERLASH NEW FIBER OPTIC CABLE TO EXISTING COMMUNICATIONS CABLE.
 - ATTACH NEW MESSENGER CABLE 40" BELOW POWER.
 - ATTACH ON FRONT SIDE (FS) OF POLE.
- SEAL ALL CONDUIT ENDS WITH DUCT AND CONDUIT SEALER, AT ALL JUNCTION BOX / CABINET ENTRANCES.

BOLD CONSTRUCTION NOTES REPRESENT "IS FIBER" WORK

SEE SHEET "SCP 2" FOR PROJECT CONSTRUCTION NOTES

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

\$\$\$\$\$SYTIME\$\$\$\$\$
 \$\$\$DDMM\$\$
 \$\$\$USERNAME\$\$\$\$\$

M M
MOTT MACDONALD
 1621 Purfoy Road, Suite 115
 Fuquay-Varina, NC 27526
 www.mottmac.com
 License No. F-0669

Prepared for the Offices of:
 TRANSPORTATION MOBILITY AND SAFETY DIVISION
 FEDERAL HIGHWAY DEPARTMENT
 NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
 750 Greenfield Parkway, Garner, NC 27529

Winston-Salem Signal System
 Cable Routing Plans
 DIVISION 09 Forsyth County Winston-Salem
 PLAN DATE: February 2023 REVIEWED BY: RW THOMPSON
 PREPARED BY: IN AVERY REVIEWED BY:
 REVISIONS INIT. DATE

SEAL
 NORTH CAROLINA PROFESSIONAL ENGINEER
 SEAL 032711
 RUSSELL W. THOMPSON
 DocuSigned by:
 Russell W. Thompson
 SIGNATURE DATE
 CADD Filename: \$FILENAME\$