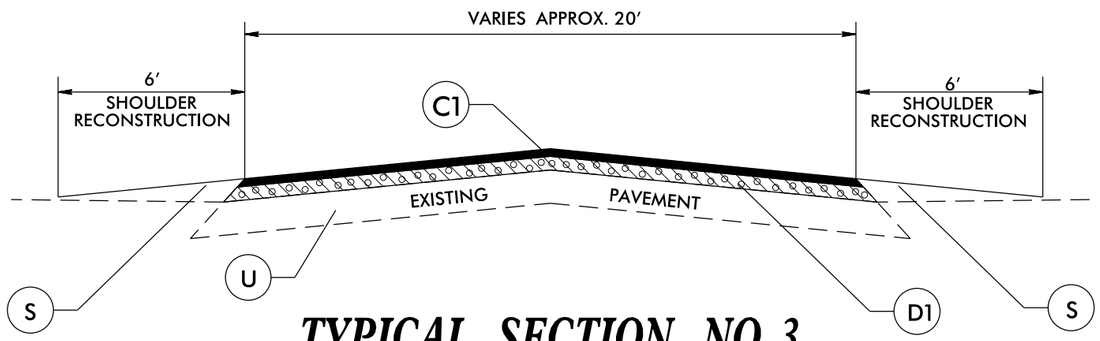

TYPICAL SECTION NO. 3

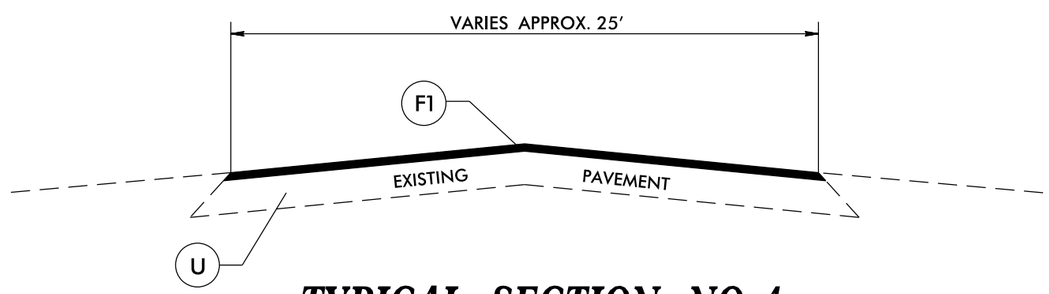

TYPICAL SECTION NO. 4

PAVEMENT SCHEDULE

C1	PROP. APPROX. 1.5″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
D1	PROP. APPROX. 2.5″ ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
F1	PROP. LATEX MODIFIED MICROSURFACING, TYPE II, AT A RATE OF 18 TO 22 LBS. PER SQ. YD.
S	AGGREGATE SHOULDER BORROW
U	EXISTING PAVEMENT.
V1	MILLING 1.0″ IN DEPTH
V2	MILLING 1.5″ IN DEPTH

21-AUG-2023 10:33
Resurfacing\Moore_October2023_Submittal\Moore_October2023_Maps_Typ.dgn