


5/14/2023 4:11:36 PM jgeille

U:\Structures\Culvert\Drawings\38333C-SMUL\_CU\_007.dgn

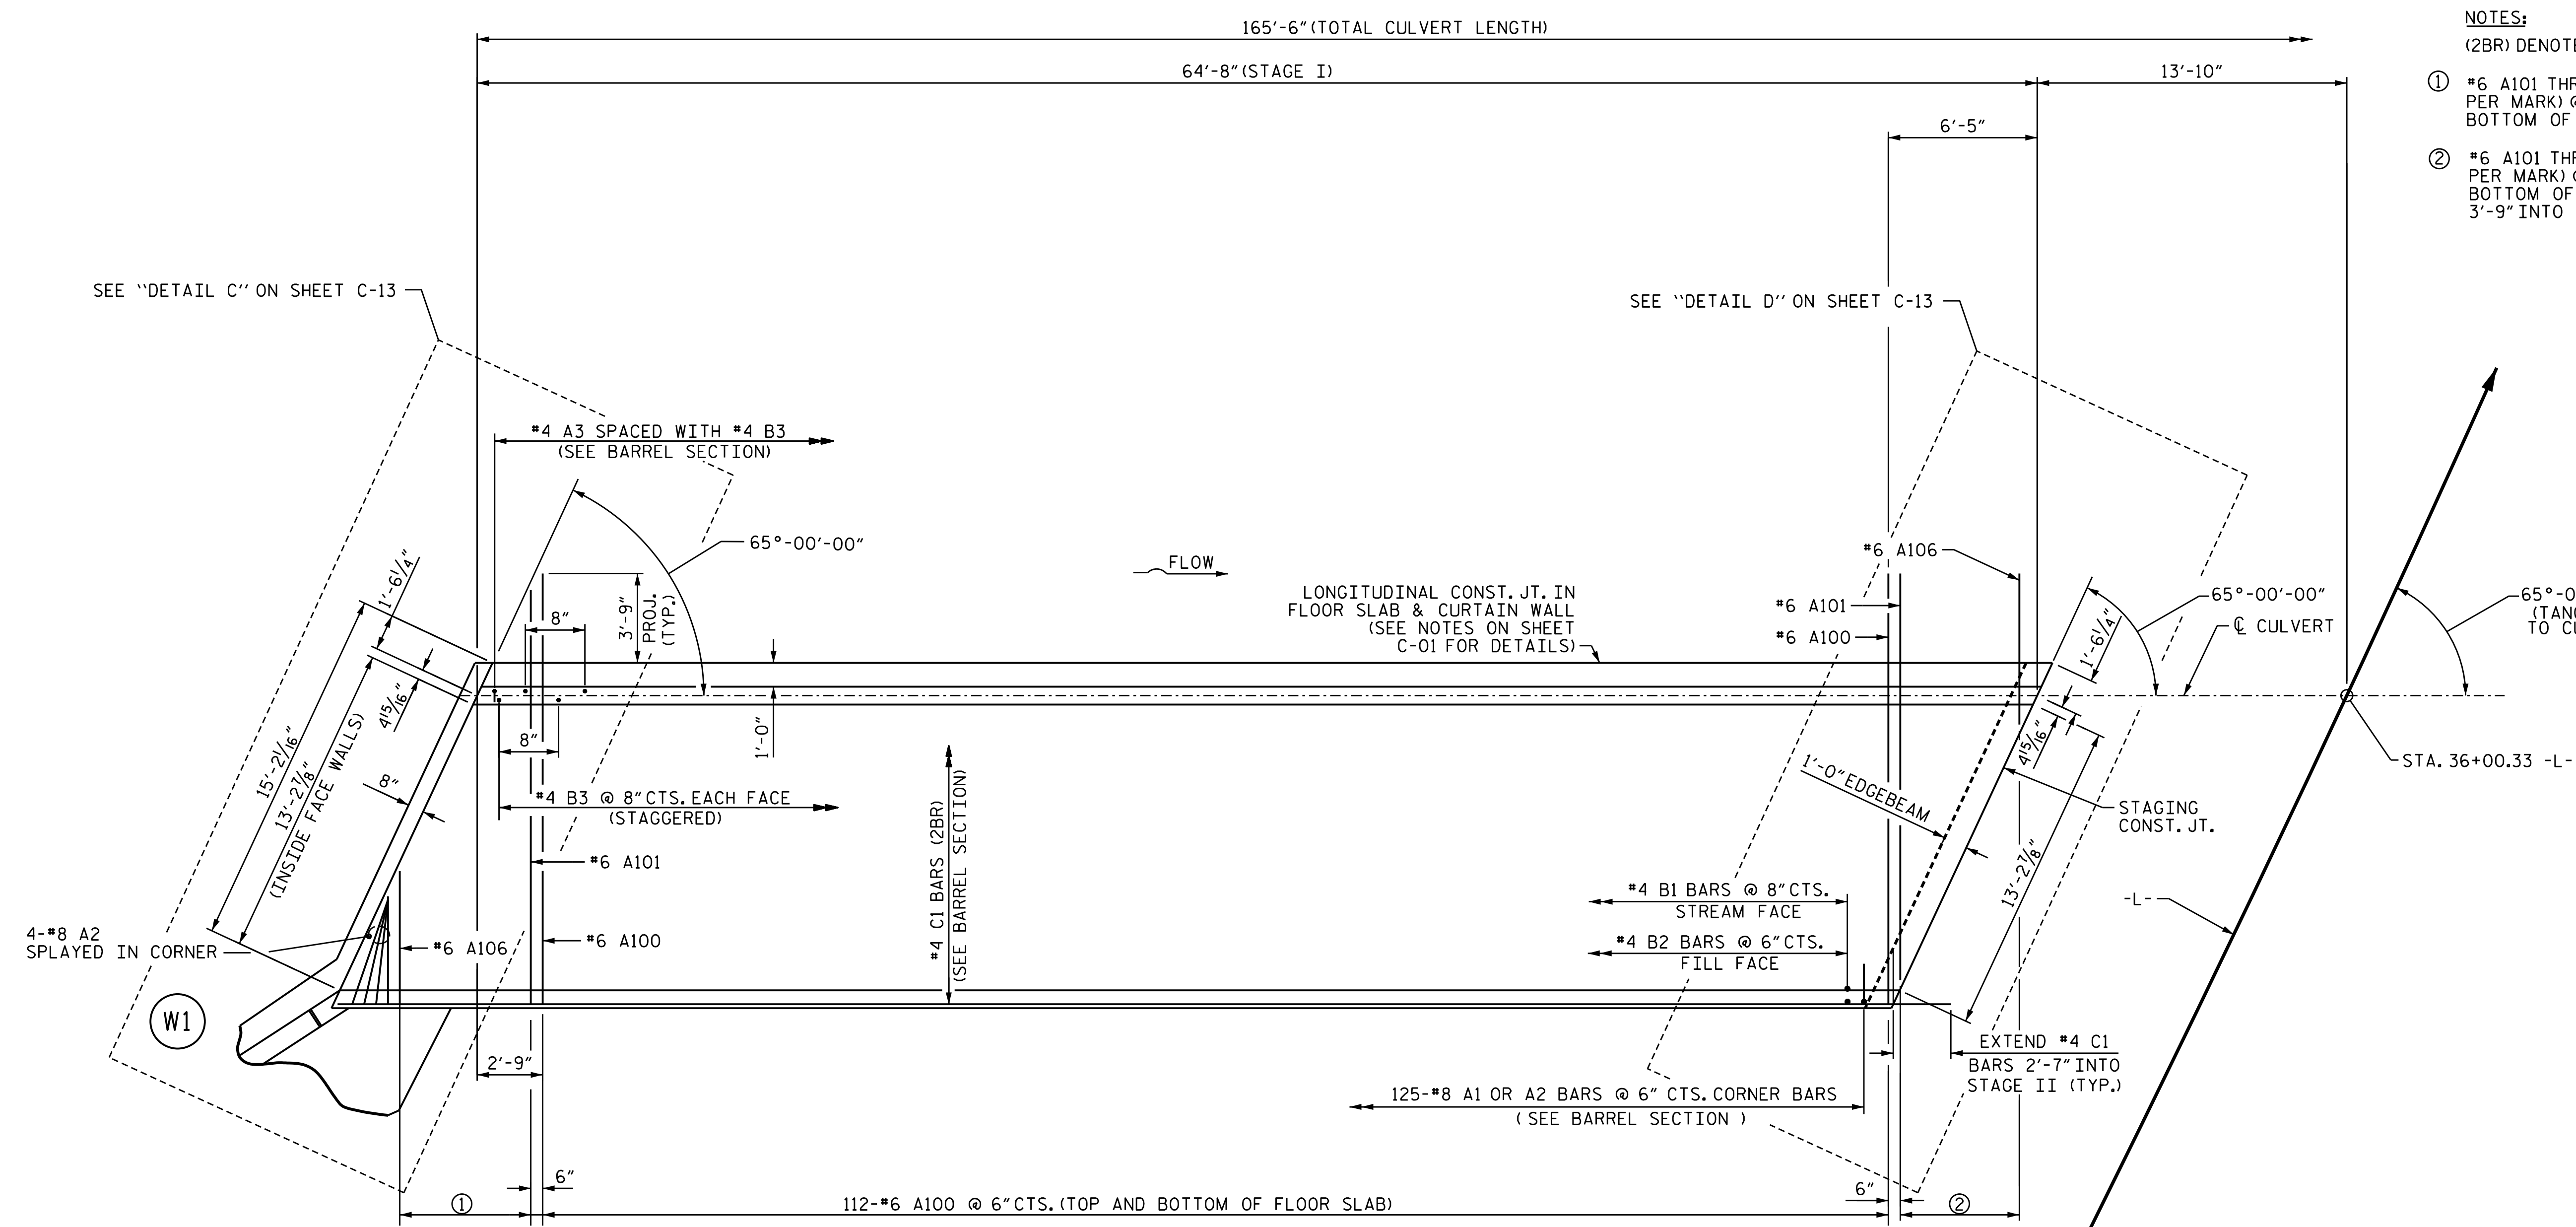


- NOTES:**  
 (2BR) DENOTES 2 BAR RUN
- ① #6 A101 THRU #6 A106 (2 BARS PER MARK) @ 6" CTS. (TOP AND BOTTOM OF FLOOR SLAB)
  - ② #6 A101 THRU #6 A106 (2 BARS PER MARK) @ 6" CTS. (TOP AND BOTTOM OF FLOOR SLAB) (EXTEND 3'-9" INTO STAGE I PHASE B)

### FLOOR SLAB PLAN - STAGE I PHASE A

PROJECT NO. R-3833C  
IREDELL COUNTY  
 STATION: 36+00.33 -L-

DRAWN BY : J. B. GETLE DATE : 08/01/19  
 CHECKED BY : M. B. ISENHOUR DATE : 02/06/20  
 DESIGN ENGINEER OF RECORD: M. B. ISENHOUR DATE : 05/04/23

Stantec Consulting Services Inc.  
 801 Jones Franklin Road  
 Suite 300  
 Raleigh, NC 27806  
 Tel. (919) 851-6866  
 Fax. (919) 851-7024  
 www.stantec.com  
 License No. F-0672

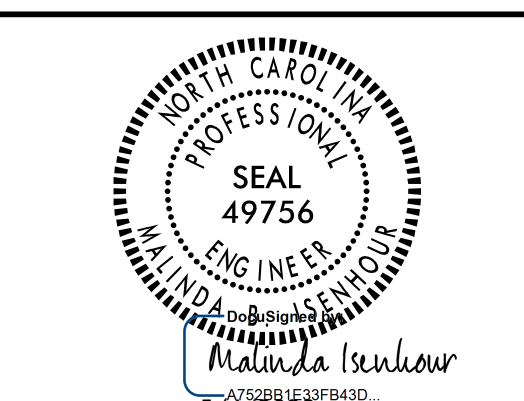

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH

**DOUBLE 12 FT. X 9 FT. CONCRETE BOX CULVERT  
 65°00'00" SKEW  
 STAGE I - PHASE A**

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	C-07
1			3			TOTAL SHEETS
2			4			16