

GENERAL NOTES

PROJ. REFERENCE NO.	SHEET NO.
I - 5972	TMP - 1B

RK&K
 P: (919) 878-8560
 8601 Six Forks Road, Forum 1, Suite 700
 Raleigh, North Carolina 27615-3960
 NC License No. F-0112
 Engineers | Construction Managers | Planners | Scientists
 www.rkk.com
 Responsive People | Creative Solutions

CHANGES MAY BE REQUIRED WHEN PHYSICAL DIMENSIONS IN THE DETAIL DRAWINGS, STANDARD DETAILS, AND ROADWAY DETAILS ARE NOT ATTAINABLE TO MEET FIELD CONDITIONS OR RESULT IN DUPLICATE OR UNDESIRED OVERLAPPING OF DEVICES. MODIFICATION MAY INCLUDE: MOVING, SUPPLEMENTING, COVERING, OR REMOVAL OF DEVICES AS DIRECTED BY THE ENGINEER.

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT EXCEPT WHEN OTHERWISE NOTED IN THE PLAN OR DIRECTED BY THE ENGINEER.

TIME RESTRICTIONS

A) DO NOT CLOSE OR NARROW TRAVEL LANES AS FOLLOWS:

ROAD NAME	DAY	TIME RESTRICTIONS
I-95, ALL RAMPS AND LOOPS	MONDAY THROUGH SUNDAY	5:00 A.M. TO 9:00 P.M.

DO NOT CLOSE OR NARROW TRAVEL LANES AS FOLLOWS:

ROAD NAME	DAY	TIME RESTRICTIONS
ALL OTHER ROADS	MONDAY THROUGH FRIDAY	5:00 A.M. TO 9:00 A.M. AND 3:00 P.M. TO 8:00 P.M.

B) DO NOT CLOSE OR NARROW TRAVEL LANES DURING HOLIDAYS AND SPECIAL EVENTS AS FOLLOWS:

ROAD NAME

I-95, ALL RAMPS AND LOOPS
 US 70 BUS. (MARKET STREET)
 MALLARD ROAD
 OUTLET CENTER DRIVE

HOLIDAY

- FOR ANY UNEXPECTED OCCURRENCE THAT CREATES UNUSUALLY HIGH TRAFFIC VOLUMES, AS DIRECTED BY THE ENGINEER.
- FOR NEW YEAR'S, BETWEEN THE HOURS OF 5:00 A.M. DECEMBER 31ST TO 9:00 P.M. JANUARY 2ND. IF NEW YEAR'S DAY IS ON A FRIDAY, SATURDAY, SUNDAY, OR MONDAY THEN UNTIL 9:00 P.M. THE FOLLOWING TUESDAY.
- FOR EASTER, BETWEEN THE HOURS OF 5:00 A.M. THURSDAY AND 9:00 P.M. MONDAY.
- FOR MEMORIAL DAY, BETWEEN THE HOURS OF 5:00 A.M. FRIDAY TO 9:00 P.M. TUESDAY.
- FOR INDEPENDENCE DAY, BETWEEN THE HOURS OF 5:00 A.M. THE DAY BEFORE INDEPENDENCE DAY AND 9:00 P.M. THE DAY AFTER INDEPENDENCE DAY.

IF INDEPENDENCE DAY IS ON A FRIDAY, SATURDAY, SUNDAY OR MONDAY THEN BETWEEN THE HOURS OF 5:00 A.M. THE THURSDAY BEFORE INDEPENDENCE DAY AND 9:00 P.M. THE TUESDAY AFTER INDEPENDENCE DAY.
- FOR LABOR DAY, BETWEEN THE HOURS OF 5:00 A.M. FRIDAY AND 9:00 P.M. TUESDAY.
- FOR THANKSGIVING DAY, BETWEEN THE HOURS OF 5:00 A.M. TUESDAY TO 9:00 P.M. MONDAY.

8. FOR CHRISTMAS, BETWEEN THE HOURS OF 5:00 A.M. THE FRIDAY BEFORE THE WEEK OF CHRISTMAS DAY AND 9:00 P.M. THE FOLLOWING TUESDAY AFTER THE WEEK OF CHRISTMAS.

C) DO NOT CLOSE ROADS AS FOLLOWS:

ROAD NAME	DAY AND TIME RESTRICTIONS	OPERATION
I-95 RAMPS	MONDAY THROUGH SUNDAY 5:00 AM TO 12:00 (MIDNIGHT)	TRAFFIC SHIFTS

D) DO NOT STOP TRAFFIC AS FOLLOWS:

ROAD NAME	DAY AND TIME RESTRICTIONS	DURATION AND OPERATION
I-95 US 70 BUS. (MARKET STREET)	MONDAY THROUGH SUNDAY 5:00 AM TO 12:00 (MIDNIGHT)	30 MINUTE MAXIMUM ROAD CLOSURE DURATION FOR BRIDGE DEMOLITION; GIRDER, OVERHANG AND FALSEWORK INSTALLATION OR REMOVAL; OVERHEAD SIGN ASSEMBLIES

E) EXCLUDING HAULING OPERATIONS THAT ARE CONDUCTED ENTIRELY BEHIND A TEMPORARY TRAFFIC BARRIER OR GUARDRAIL, MULTI-VEHICLE HAULING SHALL NOT BE ALLOWED INGRESS AND EGRESS FROM ANY OPEN TRAVEL LANE DURING THE FOLLOWING TIME RESTRICTIONS:

ROAD NAME	DAY AND TIME RESTRICTIONS
I-95, ALL RAMPS AND LOOPS	MONDAY THROUGH FRIDAY 6:00 AM TO 8:00 PM SATURDAY AND SUNDAY 10:00 AM TO 7:00 PM
US 70 BUS. (MARKET STREET)	MONDAY THROUGH FRIDAY 6:00 AM TO 9:00 AM 4:00 PM TO 7:00 PM



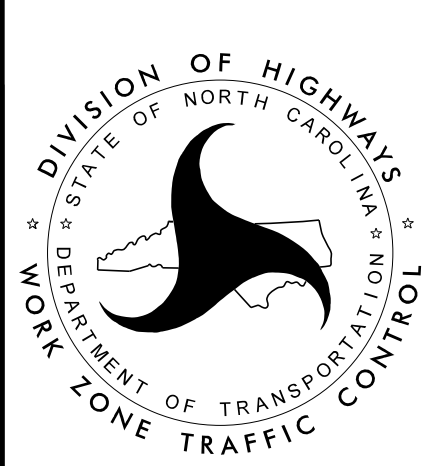
F) DO NOT CONDUCT MULTI-VEHICLE HAULING AS FOLLOWS; INGRESS AND EGRESS FROM RAMPS SHALL NOT BE ALLOWED:

ROAD NAME	DAY	TIME RESTRICTIONS
ALL OTHER ROADS	MONDAY THROUGH SUNDAY	5:00 A.M. TO 9:00 P.M.

G) DO NOT CONDUCT ANY HAULING OPERATION AGAINST THE FLOW OF TRAFFIC OF AN OPEN TRAVEL WAY UNLESS THE HAULING OPERATION IS PROTECTED BY BARRIER OR GUARDRAIL, OR AS DIRECTED BY THE ENGINEER.

H) HAUL VEHICLES SHALL NOT ENTER AND EXIT AND OPEN TRAVEL LANE AT SPEEDS MORE THAN 10 MPH BELOW THE POSTED SPEED LIMIT.

9/19/2023
15912-TMP-FSH01B.dgn
R015Bdy

APPROVED:  DATE: 9/19/2023 SEAL			<h2 style="margin: 0;">GENERAL NOTES</h2>
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED			