


SUMMARY OF QUANTITIES

	ESTIMATE	ACTUAL
BRIDGE JOINT DEMOLITION	76.0 SF	
SHOTBLASTING OF BRIDGE DECK	654.5 SY	
SILANE DECK TREATMENT	654.5 SY	
SURFACE PREPARATION FOR SILANE BARRIER RAIL TREATMENT	930.4 SF	
SILANE BARRIER RAIL TREATMENT	930.4 SF	

 BRIDGE JOINT DEMOLITION

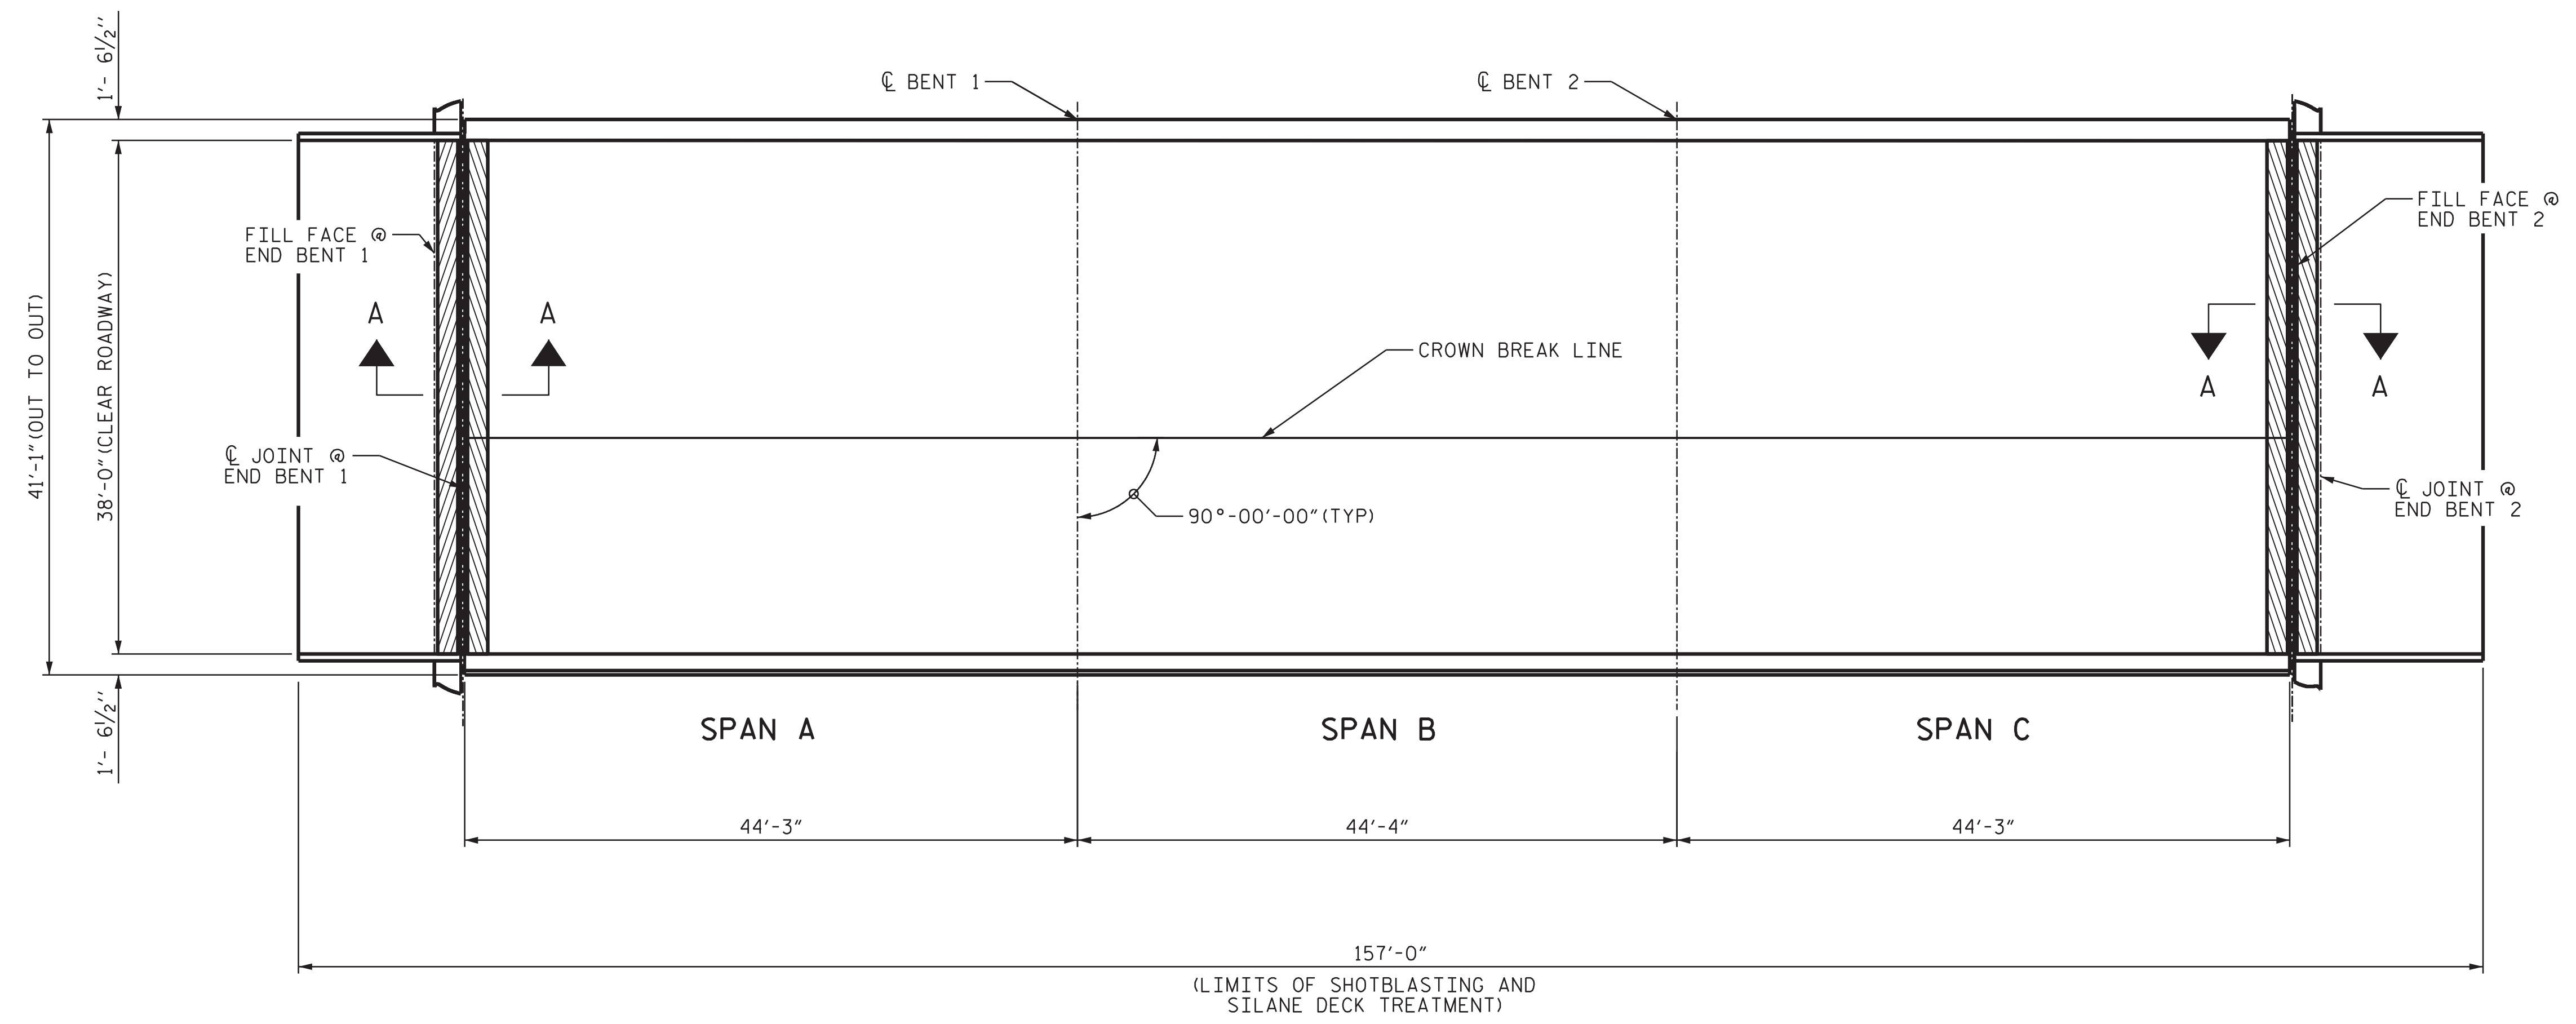


PLAN OF SPAN A- C

NOTES

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ADJUST THE ACTUAL QUANTITIES ENTERED INTO THE AS-BUILT REPAIR QUANTITY TABLE.

PROJECT NO. HI-0016
ROBESON COUNTY
BRIDGE NO. 770465

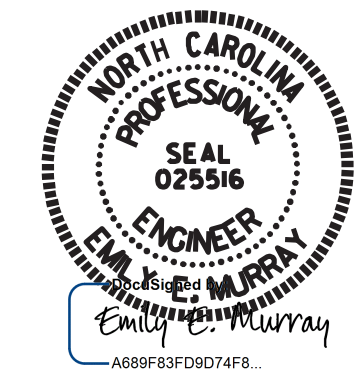

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

PLAN OF SPAN A-C

VOLKERT
5430 Wade Park Blvd., Suite 410
Raleigh, NC 27607
Tel. 919-854-0344 Fax. 919-854-0355
NC License No. F-0765

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-7
1			3			TOTAL SHEETS
2			4			21

DRAWN BY : D. A. GLADDEN DATE : 5/21
CHECKED BY : E. E. MURRAY DATE : 11/22