
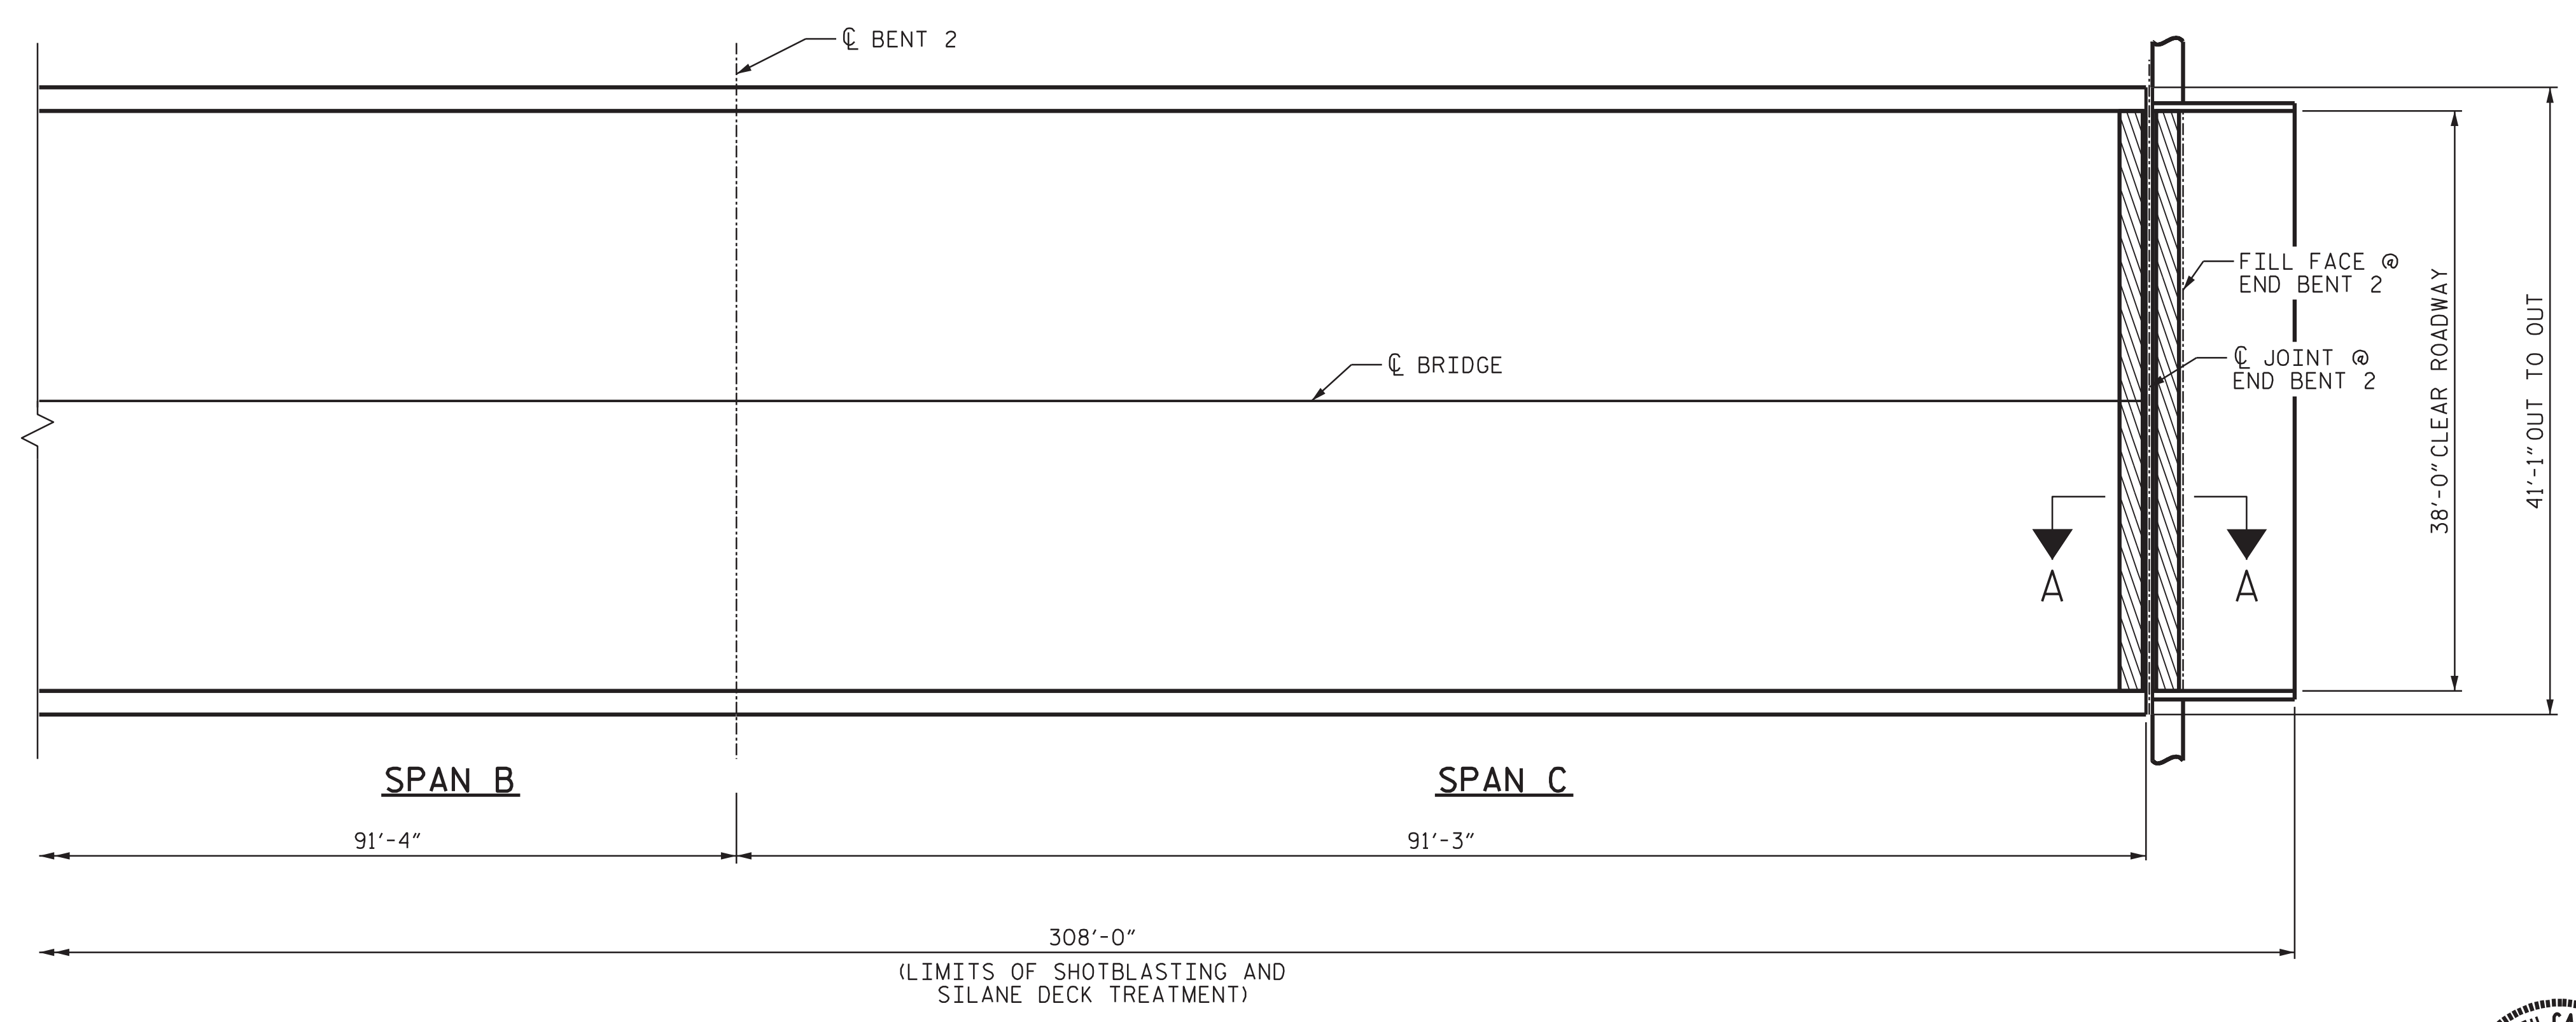
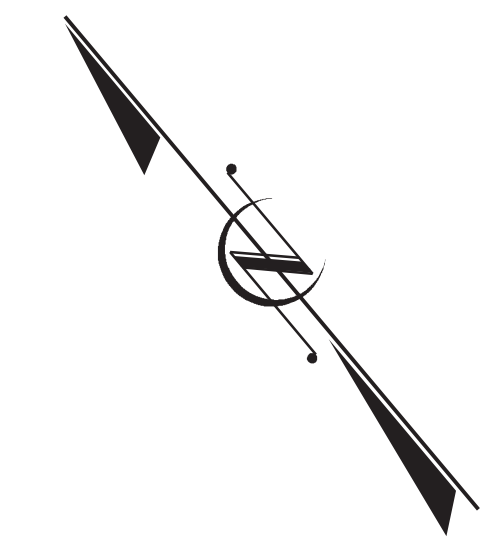


SUMMARY OF QUANTITIES

	ESTIMATE	ACTUAL
BRIDGE JOINT DEMOLITION	76.0 SF	
SHOTBLASTING OF BRIDGE DECK	1292.0 SY	
SILANE DECK TREATMENT	1292.0 SY	
SURFACE PREPARATION FOR SILANE BARRIER RAIL TREATMENT	1917.4 SF	
SILANE BARRIER RAIL TREATMENT	1917.4 SF	

 BRIDGE JOINT DEMOLITION


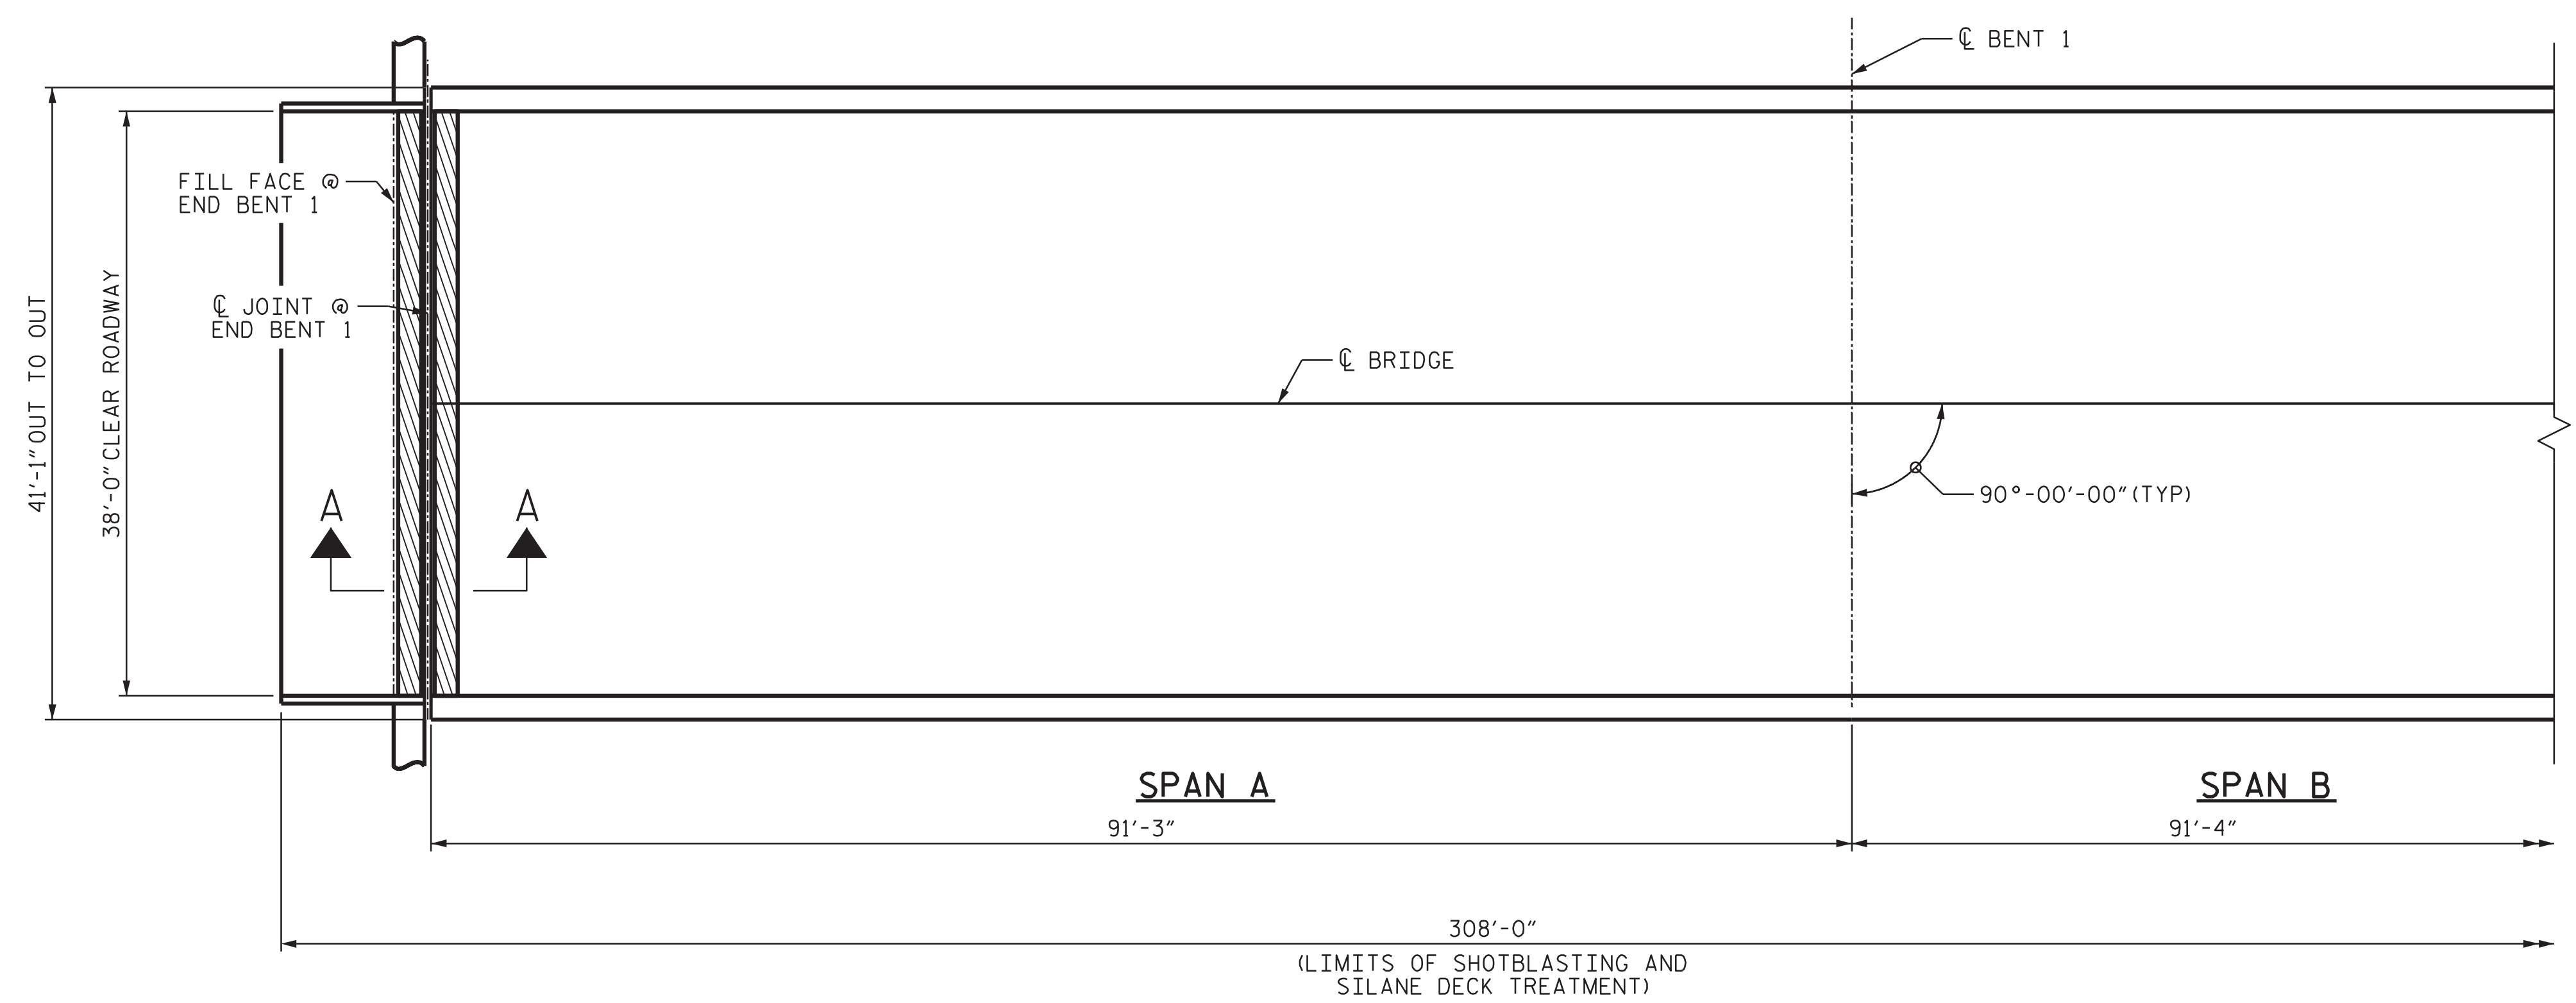


PROJECT NO. HI-0016
ROBESON COUNTY
 BRIDGE NO. 770466

NOTES

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ADJUST THE ACTUAL QUANTITIES ENTERED INTO THE AS-BUILT REPAIR QUANTITY TABLE.

SPAN A-C

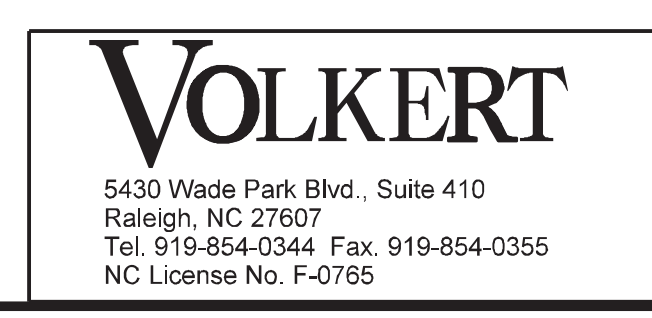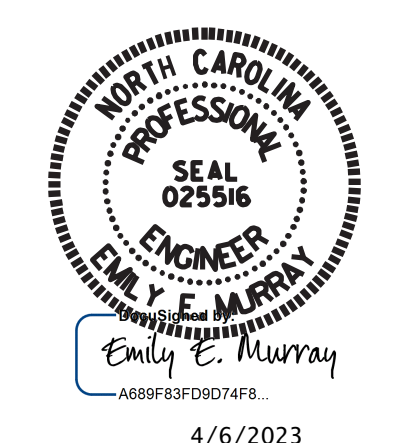

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

PLAN OF SPAN A-C

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1			3			S-13
2			4			21

DRAWN BY : J. BRYANT DATE : 11/22
 CHECKED BY : E. E. MURRAY DATE : 12/22

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED