


**NOTES:**

REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE REPAIR QUANTITY TABLE.

**DECK UNDERSIDE REPAIR QUANTITY TABLE**

PCCS REPAIRS	QUANTITIES			
	ESTIMATE		ACTUAL	
	AREA SF	VOLUME CF	AREA SF	VOLUME CF
REPAIRS TO PRESTRESSED CONCRETE CORED SLABS	23.7	4.2		

VALUES IN CHART REPRESENT ESTIMATED REPAIR TOTALS AFTER REMOVAL OF UNSOUND CONCRETE, MINIMUM OF 2" CLEARANCE TO SAWCUT. SEE "TYPICAL PCCS REPAIR DETAILS" SHEET S4-7.

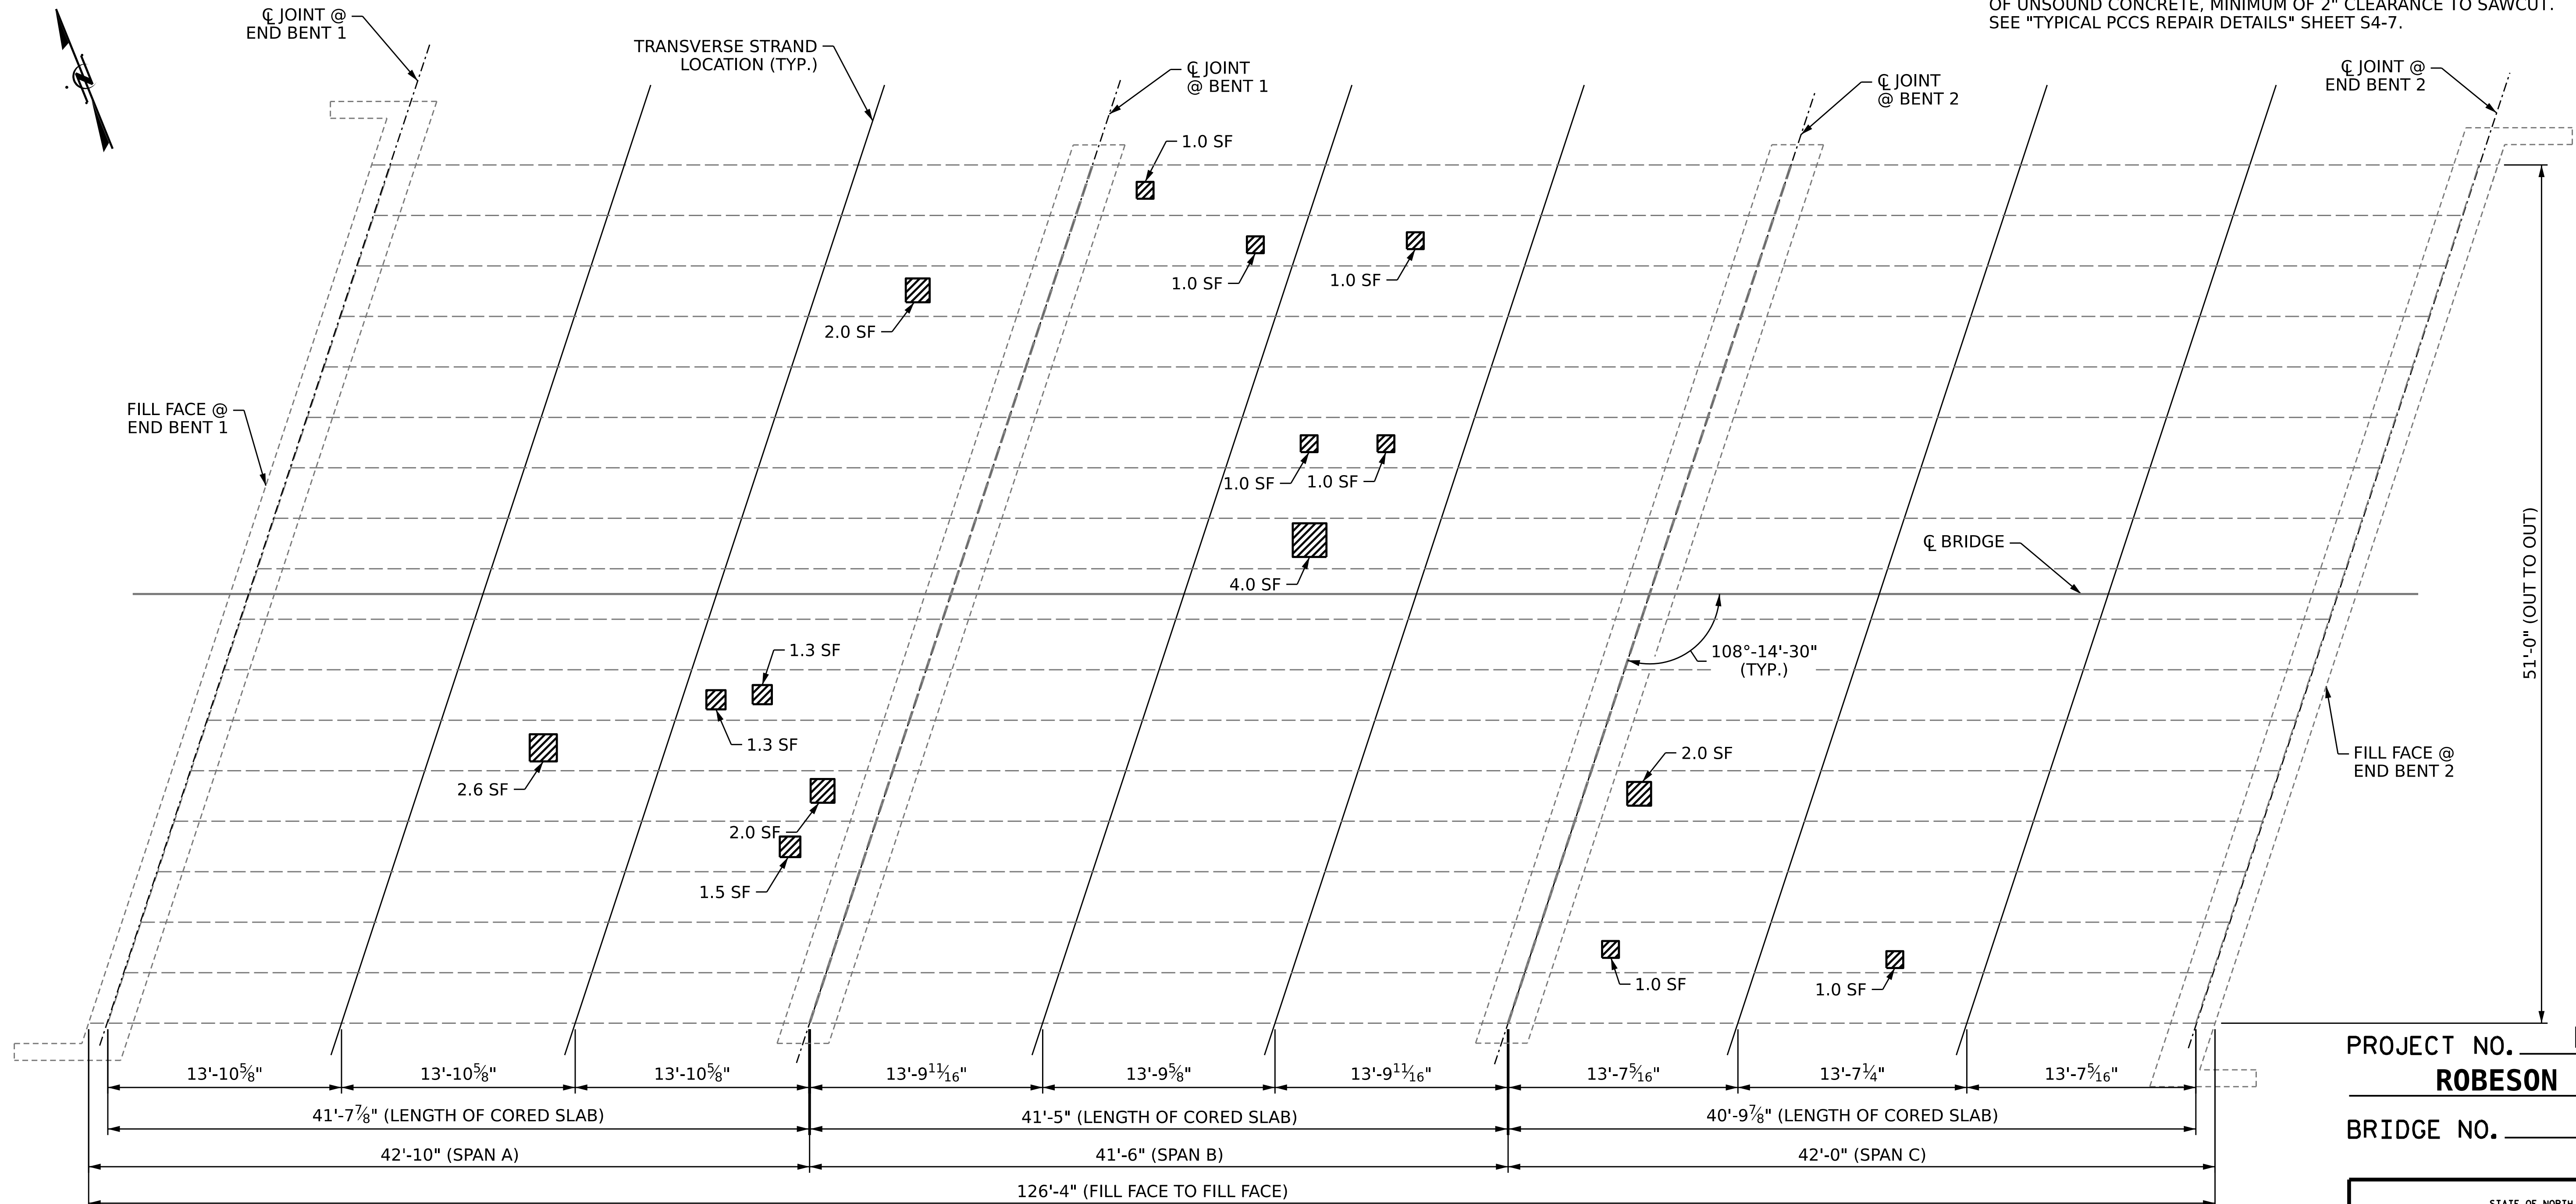

**PLAN OF SPANS**  
BOTTOM VIEW

PROJECT NO. **HI-0017**  
**ROBESON** COUNTY  
BRIDGE NO. **770454**



STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH  
**UNDERSIDE OF  
CORED SLAB  
REPAIR LOCATIONS**

DRAWN BY : J. BALDWIN DATE : 07/2022  
CHECKED BY : S. WANCE DATE : 11/2022

DOCUMENT NOT CONSIDERED  
FINAL UNLESS ALL  
SIGNATURES COMPLETED

REVISIONS						SHEET NO. S4-6
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			TOTAL SHEETS 7
2			4			