


# PROJECT TYPICAL DETAILS

NOT TO SCALE

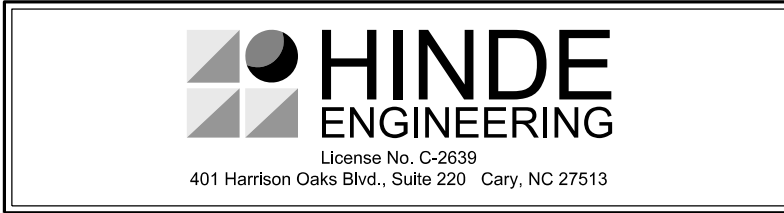


**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

**WATER AND SEWER PLANS**

PROJECT REFERENCE NO. <b>U-5839</b>	SHEET NO. <b>UC-3E</b>
DESIGNED BY: <b>JKC</b>	
DRAWN BY: <b>JKC</b>	
CHECKED BY: <b>CLS</b>	
APPROVED BY: <b>CDB</b>	
REVISED:	
NORTH CAROLINA DEPARTMENT OF TRANSPORTATION	
UTILITIES ENGINEERING SEC. PHONE: (919) 707-6690 FAX: (919) 250-4151	
3/9/2023 UTILITY CONSTRUCTION PLANS ONLY	

## UTILITY CONSTRUCTION

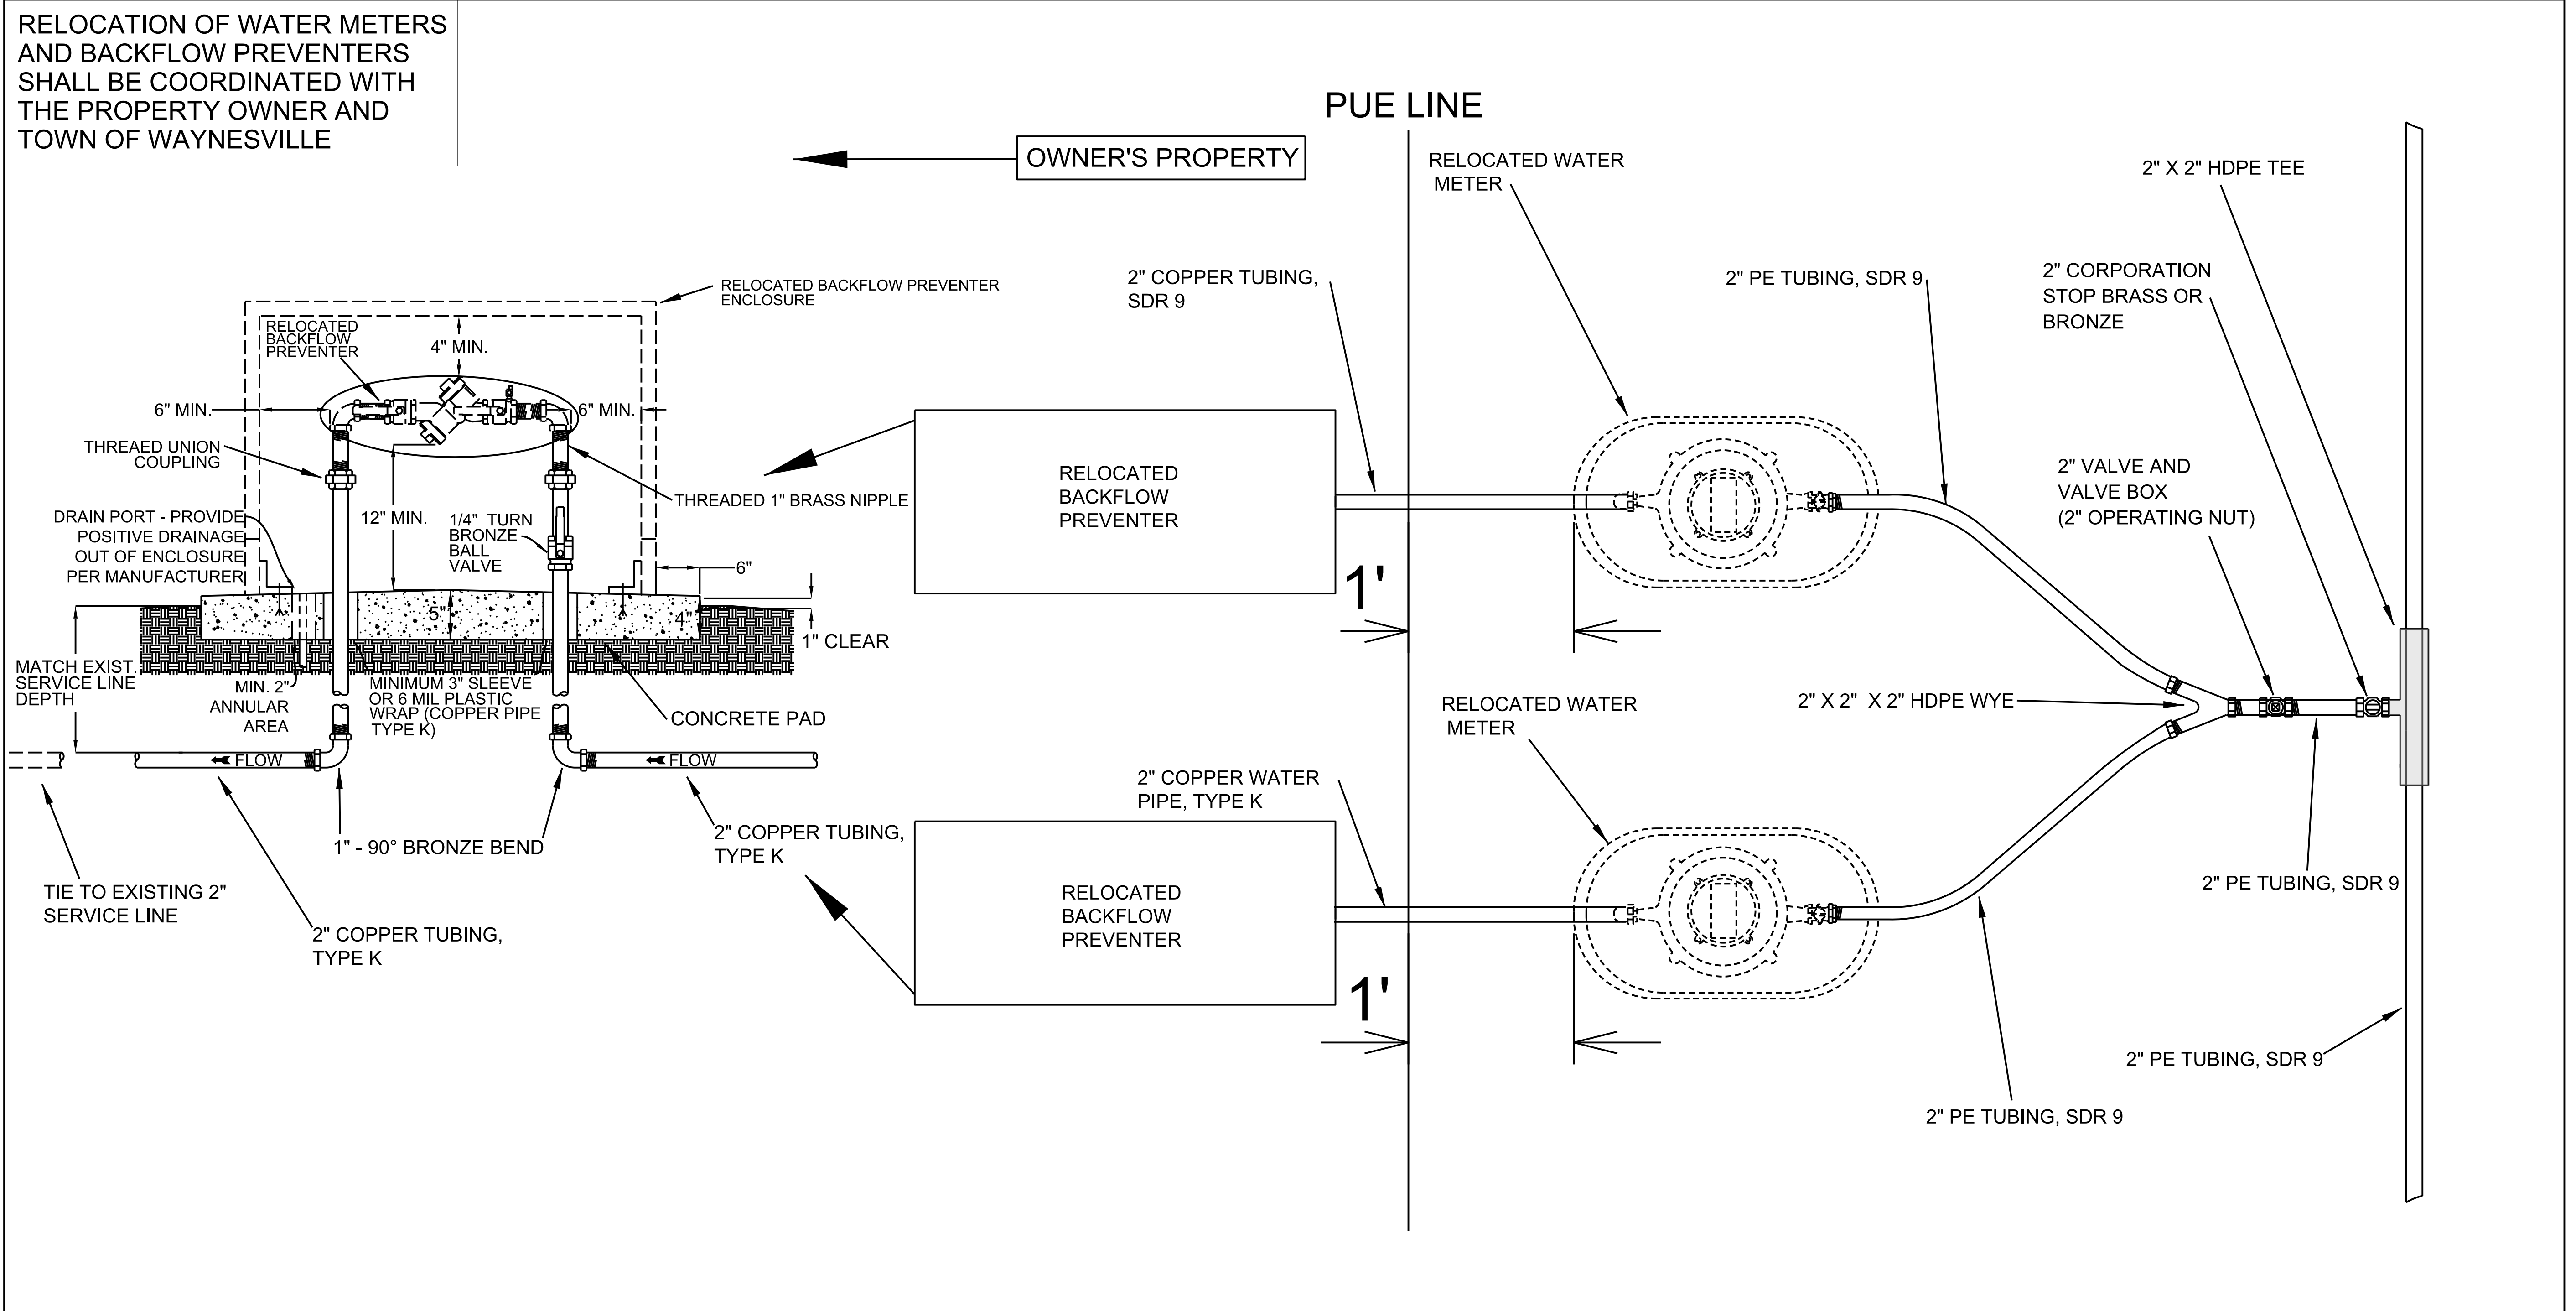

RELOCATION OF WATER METERS AND BACKFLOW PREVENTERS SHALL BE COORDINATED WITH THE PROPERTY OWNER AND TOWN OF WAYNESVILLE

OWNER'S PROPERTY

ALL FITTINGS, TAPPING SADDLES, CORPORATION STOPS AND BALL VALVES ARE INCIDENTAL TO RELOCATE WATER METER, RELOCATE RPZ BACKFLOW PREVENTION ASSEMBLY AND WATER SERVICE LINE PAY ITEMS

### WATER METER AND BACKFLOW PREVENTER RELOCATION

PLACE 3" OF #57 OR #78 WASHED STONE BENEATH RELOCATED WATER METERS

20-MAR-2023 15:20 PROJECTS\2015\A2015803.00 Mulkey - U-5839\Design\Utilities\Engineering\UC\Proj\U5839\_ut\_dtl\_UC3E\_psh.dgn